

Flexeweb Commerce

Generated by Doxygen 1.8.9.1

Thu Jun 11 2015 14:09:54

Contents

- 1 Namespace Index** **1**
 - 1.1 Packages 1

- 2 Hierarchical Index** **3**
 - 2.1 Class Hierarchy 3

- 3 Class Index** **7**
 - 3.1 Class List 7

- 4 Namespace Documentation** **11**
 - 4.1 Package ConfigCommerce 11
 - 4.2 Package ConfigCommerce.Properties 11
 - 4.3 Package FlexwebCommerce 11
 - 4.4 Package FlexwebCommerce.BusinessLogic 12
 - 4.5 Package FlexwebCommerce.BusinessLogic.Messaging 12
 - 4.6 Package FlexwebCommerce.BusinessLogic.Promotions 12
 - 4.7 Package FlexwebCommerce.BusinessLogic.Promotions.Goals 12
 - 4.8 Package FlexwebCommerce.BusinessLogic.Promotions.Rewards 12
 - 4.9 Package FlexwebCommerce.Config 13
 - 4.10 Package FlexwebCommerce.Controllers 13
 - 4.11 Package FlexwebCommerce.Controllers.api 13
 - 4.12 Package FlexwebCommerce.DataTypes 13
 - 4.13 Package FlexwebCommerce.FulfillmentContextMigrations 14
 - 4.14 Package FlexwebCommerce.Models 14
 - 4.15 Package FlexwebCommerce.OrderContextMigrations 14
 - 4.16 Package FlexwebCommerce.PromotionContextMigrations 15
 - 4.17 Package FlexwebCommerce.Services 15
 - 4.18 Package FlexwebCommerce.Services.Address 15
 - 4.19 Package FlexwebCommerce.Services.Catalogue 15
 - 4.20 Package FlexwebCommerce.Services.Currency 16
 - 4.21 Package FlexwebCommerce.Services.Customer 16
 - 4.22 Package FlexwebCommerce.Services.DropShipment 16

4.23	Package FlexwebCommerce.Services.Fulfillment	16
4.24	Package FlexwebCommerce.Services.Import	16
4.25	Package FlexwebCommerce.Services.Inventory	17
4.26	Package FlexwebCommerce.Services.Messaging	17
4.27	Package FlexwebCommerce.Services.Orders	17
4.28	Package FlexwebCommerce.Services.Payment	17
4.29	Package FlexwebCommerce.Services.Postcode	18
4.30	Package FlexwebCommerce.Services.Promotion	18
4.31	Package FlexwebCommerce.Services.Tax	18
4.32	Package FlexwebCommerce.Services.Transaction	18
4.33	Package FlexwebCommerce.TransactionContextMigrations	18
4.34	Package FlexwebCommerce.Umbraco	19
4.35	Package FlexwebCommerce.Umbraco.Admin	19
4.36	Package FlexwebCommerce.Umbraco.Admin.Interfaces	19
4.37	Package FlexwebCommerce.Umbraco.Admin.Models	19
4.38	Package FlexwebCommerce.Umbraco.Admin.UI	19
4.39	Package FlexwebCommerce.Umbraco.App_EventHandler	20
4.40	Package FlexwebCommerce.Umbraco.App_EventHandler.Events	20
4.41	Package FlexwebCommerce.Umbraco.Content	20
4.42	Package FlexwebCommerce.Umbraco.Content.PropertyEditorTypes	20
4.43	Package FlexwebCommerce.Umbraco.Controllers	20
4.44	Package FlexwebCommerce.Umbraco.Controllers.api	21
4.45	Package FlexwebCommerce.Umbraco.Controllers.Trees	21
4.46	Package FlexwebCommerce.Umbraco.Resolvers	21
4.47	Package FlexwebCommerce.Umbraco.Services	21
4.48	Package FlexwebCommerce.Umbraco.Services.Catalogue	21
4.49	Package FlexwebCommerce.Umbraco.Services.Customer	21
4.50	Package FlexwebCommerce.Umbraco.Services.Logging	21
4.51	Package FlexwebCommerce.Umbraco.Services.Messaging	22
4.52	Package FlexwebCommerce.Umbraco.Services.Security	22
4.53	Package FlexwebCommerce.WorkFlows	22
4.54	Package Manav	22
4.55	Package Manav.Controllers	22
4.56	Package Manav.Models	22
4.57	Package Manav.Models.Checkout	22
4.58	Package My	23
4.59	Package Our	23
4.60	Package Our.Umbraco	23
4.61	Package Our.Umbraco.ezSearch	23
4.62	Package XamlStaticHelperNamespace	23

5	Class Documentation	25
5.1	FlexwebCommerce.Models.Address Class Reference	25
5.2	FlexwebCommerce.Services.Address.AddressProvider Class Reference	25
5.3	FlexwebCommerce.Services.Address.AddressProviderCollection Class Reference	26
5.4	FlexwebCommerce.Services.Address.AddressService Class Reference	26
5.5	FlexwebCommerce.Controllers.api.AddressWebServiceController Class Reference	27
5.5.1	Detailed Description	27
5.5.2	Member Function Documentation	28
5.5.2.1	CreateAddress	28
5.5.2.2	DeleteAddress	29
5.5.2.3	GetAddress	29
5.5.2.4	GetCurrentCustomerAddresses	29
5.5.2.5	GetCurrentCustomerDefaultBillingAddress	29
5.5.2.6	GetCurrentCustomerDefaultShippingAddress	30
5.5.2.7	UpdateAddress	30
5.6	FlexwebCommerce.Config.AdminUISection Class Reference	30
5.7	FlexwebCommerce.Config.AdminUISectionCollection Class Reference	30
5.8	FlexwebCommerce.Config.AdminUISectionTabCollection Class Reference	31
5.9	FlexwebCommerce.Config.AdminUISettingsValidation Class Reference	32
5.9.1	Detailed Description	32
5.9.2	Member Function Documentation	32
5.9.2.1	Validate	32
5.10	FlexwebCommerce.BusinessLogic.Promotions.Rewards.AmountOffOrder Class Reference	32
5.11	FlexwebCommerce.BusinessLogic.Promotions.Rewards.AmountOffOrderLine Class Reference	33
5.12	FlexwebCommerce.Basket Class Reference	33
5.12.1	Member Function Documentation	34
5.12.1.1	InitializeComponent	34
5.12.1.2	InitializeComponent	34
5.13	FlexwebCommerce.BusinessLogic.Promotions.Goals.BuyBundle Class Reference	34
5.14	FlexwebCommerce.BusinessLogic.Promotions.Goals.BuyXfromCategory Class Reference	35
5.15	FlexwebCommerce.BusinessLogic.Promotions.Goals.BuyXofProduct Class Reference	35
5.16	FlexwebCommerce.Models.Catalogue Class Reference	36
5.17	FlexwebCommerce.BusinessLogic.Catalogue Class Reference	36
5.18	FlexwebCommerce.Services.Catalogue.CatalogueController Class Reference	36
5.19	FlexwebCommerce.Umbraco.Controllers.api.CatalogueController Class Reference	37
5.20	FlexwebCommerce.Services.Catalogue.CatalogueProvider Class Reference	37
5.21	FlexwebCommerce.Services.Catalogue.CatalogueProviderCollection Class Reference	39
5.22	FlexwebCommerce.Services.Catalogue.CatalogueXSLTService Class Reference	39
5.23	FlexwebCommerce.Models.Category Class Reference	39
5.24	FlexwebCommerce.Umbraco.Content.PropertyEditorTypes.CategorySelector Class Reference	40

5.25	FlexwebCommerce.WorkFlows.Checkout Class Reference	40
5.25.1	Member Function Documentation	41
5.25.1.1	InitializeComponent	41
5.25.1.2	InitializeComponent	41
5.26	Manav.Controllers.CheckoutSurfaceController Class Reference	41
5.27	FlexwebCommerce.Controllers.api.CheckoutWebServiceController Class Reference	41
5.28	FlexwebCommerce.Models.Country Class Reference	42
5.29	FlexwebCommerce.Models.Coupon Class Reference	42
5.30	FlexwebCommerce.BusinessLogic.Promotions.Goals.CouponCode Class Reference	42
5.31	FlexwebCommerce.Models.Currency Class Reference	43
5.32	FlexwebCommerce.Services.Currency.CurrencyProvider Class Reference	43
5.33	FlexwebCommerce.Services.Currency.CurrencyProviderCollection Class Reference	44
5.34	FlexwebCommerce.Services.Currency.CurrencyXSLTService Class Reference	44
5.35	FlexwebCommerce.Models.Customer Class Reference	45
5.36	FlexwebCommerce.Services.Customer.CustomerProvider Class Reference	45
5.37	FlexwebCommerce.Services.Customer.CustomerProviderCollection Class Reference	46
5.38	FlexwebCommerce.Controllers.api.CustomerWebServiceController Class Reference	46
5.38.1	Detailed Description	46
5.38.2	Member Function Documentation	47
5.38.2.1	AddCustomer	47
5.38.2.2	GenerateResetToken	48
5.38.2.3	Get	48
5.38.2.4	UpdateCurrentCustomersPassword	48
5.38.2.5	UpdateCustomer	48
5.38.2.6	UpdatePassword	49
5.39	FlexwebCommerce.DataTypes.DataType Class Reference	49
5.40	FlexwebCommerce.Services.Inventory.SqlInventoryProvider.dbContext Class Reference	49
5.41	FlexwebCommerce.Services.Orders.SqlOrderProvider.dbContext Class Reference	50
5.42	FlexwebCommerce.Services.Address.SqlAddressProvider.dbContext Class Reference	51
5.43	FlexwebCommerce.Services.Promotion.StandardPromotionProvider.dbContext Class Reference	51
5.44	FlexwebCommerce.Services.Currency.SqlCurrencyProvider.dbContext Class Reference	52
5.45	FlexwebCommerce.Services.Customer.SqlCustomerProvider.dbContext Class Reference	52
5.46	FlexwebCommerce.Services.Fulfillment.BandedFulfillmentProvider.dbContext Class Reference	53
5.47	Manav.Models.Checkout.DeliveryViewModel Class Reference	53
5.48	FlexwebCommerce.Models.Discount Class Reference	54
5.49	FlexwebCommerce.Services.DropShipment.DropShipmentProvider Class Reference	54
5.50	FlexwebCommerce.Services.DropShipment.DropShipmentProviderCollection Class Reference	54
5.51	FlexwebCommerce.Models.EcommerceEnums Class Reference	55
5.52	Our.Umbraco.ezSearch.ezSearchBoostrapper Class Reference	55
5.53	ezTweet Class Reference	55

5.54	FlexwebCommerce.FilterConfig Class Reference	56
5.55	FlexwebCommerce.Umbraco.FilterConfig Class Reference	56
5.56	FlexwebCommerce.BusinessLogic.Promotions.Rewards.FixedRateDiscount Class Reference	56
5.57	FlexwebCommerce.Umbraco.Content.flxCataloguesData Class Reference	57
5.57.1	Property Documentation	57
5.57.1.1	flxCatalogueContentTypeAlias	57
5.57.1.2	flxCataloguesContentName	57
5.57.1.3	flxCataloguesContentTypeAlias	57
5.58	FlexwebCommerce.Umbraco.Admin.UI.FlxCatalogueTree Class Reference	58
5.59	FlexwebCommerce.Umbraco.Content.flxCommerceApplication Class Reference	58
5.60	FlexwebCommerce.Umbraco.Content.flxMarketingData Class Reference	58
5.60.1	Property Documentation	59
5.60.1.1	flxMarketingContentTypeAlias	59
5.61	FlexwebCommerce.Umbraco.Content.flxOrdersData Class Reference	59
5.62	FlexwebCommerce.Umbraco.Admin.UI.FlxOrderTree Class Reference	59
5.63	FlexwebCommerce.Umbraco.Admin.UI.FlxPromotionTree Class Reference	60
5.64	FlexwebCommerce.Umbraco.Content.flxReportsData Class Reference	60
5.65	FlexwebCommerce.Umbraco.Content.flxSettingsData Class Reference	60
5.66	FlexwebCommerce.Umbraco.Admin.Interfaces.FlxTreeController Class Reference	61
5.67	FlexwebCommerce.Umbraco.Controllers.Trees.flxTreeController Class Reference	61
5.68	FlexwebCommerce.Umbraco.Admin.Models.FlxTreeNode Class Reference	61
5.69	FlexwebCommerce.BusinessLogic.Promotions.Rewards.FreeProduct Class Reference	62
5.70	FlexwebCommerce.Services.Messaging.FtpClient Class Reference	62
5.71	FlexwebCommerce.Services.Messaging.FtpState Class Reference	62
5.72	FlexwebCommerce.Models.FulfillmentOption Class Reference	63
5.73	FlexwebCommerce.Services.Fulfillment.FulfillmentProvider Class Reference	63
5.74	FlexwebCommerce.Services.Fulfillment.FulfillmentProviderCollection Class Reference	64
5.75	FlexwebCommerce.Models.FulfillmentRestriction Class Reference	64
5.76	FlexwebCommerce.Controllers.api.FulfillmentWebServiceController Class Reference	65
5.77	FlexwebCommerce.BusinessLogic.Messaging.GenerateDictionary Class Reference	65
5.78	FlexwebCommerce.GoalsElement Class Reference	65
5.79	FlexwebCommerce.Config.GoalsElementCollection Class Reference	66
5.80	FlexwebCommerce.Umbraco.Resolvers.hasChildrenResolver Class Reference	66
5.81	FlexwebCommerce.Services.Fulfillment.HttpRequestHandler Class Reference	66
5.82	FlexwebCommerce.Services.Import.ImportProvider Class Reference	67
5.83	FlexwebCommerce.Services.Import.ImportProviderCollection Class Reference	67
5.84	FlexwebCommerce.Services.Import.ImportService Class Reference	67
5.85	FlexwebCommerce.Controllers.api.ImportWebServiceController Class Reference	67
5.86	FlexwebCommerce.Models.Inventory Class Reference	68
5.87	FlexwebCommerce.Services.Inventory.InventoryProvider Class Reference	68

5.88 FlexwebCommerce.Services.Inventory.InventoryProviderCollection Class Reference	69
5.89 FlexwebCommerce.Controllers.api.InventoryWebServiceController Class Reference	70
5.90 FlexwebCommerce.Services.Inventory.InventoryXSLTService Class Reference	70
5.91 FlexwebCommerce.Licensing Class Reference	70
5.92 FlexwebCommerce.Umbraco.Resolvers.MapUmbracoToModelResolver< T > Class Template Reference	70
5.93 FlexwebCommerce.Models.MarketingCampaign Class Reference	71
5.94 FlexwebCommerce.Messages Class Reference	71
5.95 FlexwebCommerce.Models.Order Class Reference	72
5.96 FlexwebCommerce.Models.OrderLine Class Reference	73
5.97 FlexwebCommerce.Models.OrderNote Class Reference	74
5.98 FlexwebCommerce.Services.Orders.OrderProvider Class Reference	75
5.99 FlexwebCommerce.Services.Orders.OrderProviderCollection Class Reference	76
5.100 FlexwebCommerce.Services.Orders.OrderService Class Reference	77
5.101 FlexwebCommerce.Models.OrderShipment Class Reference	78
5.102 FlexwebCommerce.Models.OrderStatus Class Reference	78
5.103 FlexwebCommerce.Controllers.api.OrderWebServiceController Class Reference	79
5.104 FlexwebCommerce.Services.Promotion.OrderXSLTService Class Reference	79
5.105 FlexwebCommerce.Services.Orders.OrderXSLTService Class Reference	79
5.106 FlexwebCommerce.Models.PackageInfo Class Reference	80
5.107 FlexwebCommerce.Models.PaymentGateway Class Reference	81
5.108 FlexwebCommerce.Services.Payment.PaymentGatewayProvider Class Reference	81
5.109 FlexwebCommerce.Services.Payment.PaymentGatewayProviderCollection Class Reference	82
5.110 FlexwebCommerce.Controllers.api.PaymentGatewayWebServiceController Class Reference	82
5.110.1 Member Function Documentation	82
5.110.1.1 ValidatePayPalPayment	82
5.111 FlexwebCommerce.Services.Payment.PaymentProvider Class Reference	83
5.112 FlexwebCommerce.Services.Payment.PaymentProviderCollection Class Reference	83
5.113 FlexwebCommerce.Services.Payment.PaymentService Class Reference	83
5.114 FlexwebCommerce.Services.Payment.PaymentXSLTService Class Reference	84
5.115 FlexwebCommerce.BusinessLogic.Promotions.Rewards.PercentOffOrder Class Reference	84
5.116 FlexwebCommerce.BusinessLogic.Promotions.Rewards.PercentOffOrderLine Class Reference	84
5.117 FlexwebCommerce.Models.PostalZone Class Reference	85
5.118 FlexwebCommerce.Services.Postcode.PostcodeProvider Class Reference	85
5.119 FlexwebCommerce.Services.Postcode.PostcodeProviderCollection Class Reference	86
5.120 FlexwebCommerce.Services.Postcode.PostcodeService Class Reference	86
5.121 FlexwebCommerce.Controllers.api.PostcodeWebServiceController Class Reference	86
5.121.1 Detailed Description	87
5.121.2 Member Function Documentation	87
5.121.2.1 GetAddressByld	87

5.121.2.2 GetAddressListFromPostcode	87
5.122 FlexwebCommerce.Models.Product Class Reference	87
5.123 FlexwebCommerce.Umbraco.Content.PropertyEditorTypes.ProductSelector Class Reference	88
5.124 FlexwebCommerce.Models.Promotion Class Reference	88
5.125 FlexwebCommerce.Models.PromotionGoal Class Reference	89
5.126 FlexwebCommerce.PromotionGoalTypeConverter Class Reference	89
5.127 FlexwebCommerce.Services.Promotion.PromotionProvider Class Reference	90
5.128 FlexwebCommerce.Services.Promotion.PromotionProviderCollection Class Reference	91
5.129 FlexwebCommerce.Models.PromotionReward Class Reference	91
5.130 FlexwebCommerce.Services.Promotion.PromotionService Class Reference	92
5.131 FlexwebCommerce.Config.PromotionsSection Class Reference	93
5.132 FlexwebCommerce.Controllers.api.PromotionWebServiceController Class Reference	93
5.133 FlexwebCommerce.Services.ProviderUtils Class Reference	94
5.134 FlexwebCommerce.RewardsElement Class Reference	94
5.135 FlexwebCommerce.Config.RewardsElementCollection Class Reference	94
5.136 FlexwebCommerce.Umbraco.Admin.UI.RootNodeKey Class Reference	95
5.137 FlexwebCommerce.Umbraco.RouteConfig Class Reference	95
5.138 FlexwebCommerce.RouteConfig Class Reference	95
5.139 FlexwebCommerce.Umbraco.App_EventHandler.Events.SavedEvent Class Reference	96
5.140 FlexwebCommerce.Umbraco.App_EventHandler.Events.SavingEvent Class Reference	96
5.141 FlexwebCommerce.Config.SectionsSettingsValidation Class Reference	96
5.141.1 Detailed Description	96
5.142 FlexwebCommerce.Controllers.api.SecurityWebServiceController Class Reference	97
5.143 FlexwebCommerce.Config.ServicesSection Class Reference	97
5.144 FlexwebCommerce.BusinessLogic.Promotions.Goals.SpendMoreThan Class Reference	98
5.145 FlexwebCommerce.Services.Inventory.SqlInventoryProvider Class Reference	98
5.146 FlexwebCommerce.Services.Inventory.SqlSpInventoryProvider Class Reference	99
5.147 FlexwebCommerce.Services.Orders.SqlSpOrderProvider Class Reference	100
5.148 Manav.Models.Checkout.StartCheckoutViewModel Class Reference	103
5.149 FlexwebCommerce.Umbraco.App_EventHandler.Events.StartedEvent Class Reference	103
5.150 FlexwebCommerce.Config.TabElement Class Reference	104
5.150.1 Property Documentation	104
5.150.1.1 Name	104
5.150.1.2 Properties	104
5.151 FlexwebCommerce.Config.TabsSettingsValidation Class Reference	104
5.151.1 Detailed Description	105
5.151.2 Member Function Documentation	105
5.151.2.1 Validate	105
5.152 FlexwebCommerce.Services.Tax.TaxProvider Class Reference	105
5.153 FlexwebCommerce.Services.Tax.TaxProviderCollection Class Reference	105

5.154FlexewebCommerce.Services.Tax.TaxService Class Reference	106
5.155FlexewebCommerce.Services.Tax.TaxXSLTService Class Reference	106
5.156FlexewebCommerce.Controllers.api.TestController Class Reference	106
5.157tmhOAuth Class Reference	107
5.157.1 Detailed Description	107
5.157.2 Constructor & Destructor Documentation	107
5.157.2.1 __construct	107
5.157.3 Member Function Documentation	107
5.157.3.1 extract_params	107
5.157.3.2 request	108
5.157.3.3 streaming_request	108
5.157.3.4 transformText	108
5.157.3.5 url	109
5.158tmhUtilities Class Reference	109
5.158.1 Detailed Description	109
5.158.2 Member Function Documentation	110
5.158.2.1 auto_fix_time_request	110
5.158.2.2 endswith	110
5.158.2.3 entify	110
5.158.2.4 entify_with_options	110
5.158.2.5 php_self	111
5.158.2.6 pr	111
5.158.2.7 read_input	111
5.158.2.8 read_password	111
5.159FlexewebCommerce.Models.Transaction Class Reference	112
5.160FlexewebCommerce.Services.Transaction.SqlTransactionProvider.TransactionContext Class Reference	112
5.161FlexewebCommerce.Services.Transaction.TransactionProvider Class Reference	113
5.162FlexewebCommerce.Services.Transaction.TransactionProviderCollection Class Reference	113
5.163FlexewebCommerce.Services.Transaction.TransactionService Class Reference	113
5.164FlexewebCommerce.Models.TransactionType Class Reference	114
5.165FlexewebCommerce.Umbraco.App_EventHandler.Events.TrashedEvent Class Reference	114
5.166FlexewebCommerce.Umbraco.App_EventHandler.Events.TreeEvent Class Reference	114

Chapter 1

Namespace Index

1.1 Packages

Here are the packages with brief descriptions (if available):

ConfigCommerce	11
ConfigCommerce.Properties	11
FlexwebCommerce	11
FlexwebCommerce.BusinessLogic	12
FlexwebCommerce.BusinessLogic.Messaging	12
FlexwebCommerce.BusinessLogic.Promotions	12
FlexwebCommerce.BusinessLogic.Promotions.Goals	12
FlexwebCommerce.BusinessLogic.Promotions.Rewards	12
FlexwebCommerce.Config	13
FlexwebCommerce.Controllers	13
FlexwebCommerce.Controllers.api	13
FlexwebCommerce.DataTypes	13
FlexwebCommerce.FulfillmentContextMigrations	14
FlexwebCommerce.Models	14
FlexwebCommerce.OrderContextMigrations	14
FlexwebCommerce.PromotionContextMigrations	15
FlexwebCommerce.Services	15
FlexwebCommerce.Services.Address	15
FlexwebCommerce.Services.Catalogue	15
FlexwebCommerce.Services.Currency	16
FlexwebCommerce.Services.Customer	16
FlexwebCommerce.Services.DropShipment	16
FlexwebCommerce.Services.Fulfillment	16
FlexwebCommerce.Services.Import	16
FlexwebCommerce.Services.Inventory	17
FlexwebCommerce.Services.Messaging	17
FlexwebCommerce.Services.Orders	17
FlexwebCommerce.Services.Payment	17
FlexwebCommerce.Services.Postcode	18
FlexwebCommerce.Services.Promotion	18
FlexwebCommerce.Services.Tax	18
FlexwebCommerce.Services.Transaction	18
FlexwebCommerce.TransactionContextMigrations	18
FlexwebCommerce.Umbraco	19
FlexwebCommerce.Umbraco.Admin	19
FlexwebCommerce.Umbraco.Admin.Interfaces	19
FlexwebCommerce.Umbraco.Admin.Models	19
FlexwebCommerce.Umbraco.Admin.UI	19

FlexwebCommerce.Umbraco.App_EventHandler	20
FlexwebCommerce.Umbraco.App_EventHandler.Events	20
FlexwebCommerce.Umbraco.Content	20
FlexwebCommerce.Umbraco.Content.PropertyEditorTypes	20
FlexwebCommerce.Umbraco.Controllers	20
FlexwebCommerce.Umbraco.Controllers.api	21
FlexwebCommerce.Umbraco.Controllers.Trees	21
FlexwebCommerce.Umbraco.Resolvers	21
FlexwebCommerce.Umbraco.Services	21
FlexwebCommerce.Umbraco.Services.Catalogue	21
FlexwebCommerce.Umbraco.Services.Customer	21
FlexwebCommerce.Umbraco.Services.Logging	21
FlexwebCommerce.Umbraco.Services.Messaging	22
FlexwebCommerce.Umbraco.Services.Security	22
FlexwebCommerce.WorkFlows	22
Manav	22
Manav.Controllers	22
Manav.Models	22
Manav.Models.Checkout	22
My	23
Our	23
Our.Umbraco	23
Our.Umbraco.ezSearch	23
XamlStaticHelperNamespace	23

Chapter 2

Hierarchical Index

2.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

Activity	
FlexewebCommerce.Basket	33
FlexewebCommerce.Basket	33
FlexewebCommerce.WorkFlows.Checkout	40
FlexewebCommerce.WorkFlows.Checkout	40
FlexewebCommerce.Models.Address	25
FlexewebCommerce.Services.Address.AddressService	26
ApiController	
FlexewebCommerce.Controllers.api.AddressWebServiceController	27
FlexewebCommerce.Controllers.api.CheckoutWebServiceController	41
FlexewebCommerce.Controllers.api.CustomerWebServiceController	46
FlexewebCommerce.Controllers.api.FulfillmentWebServiceController	65
FlexewebCommerce.Controllers.api.ImportWebServiceController	67
FlexewebCommerce.Controllers.api.InventoryWebServiceController	70
FlexewebCommerce.Controllers.api.OrderWebServiceController	79
FlexewebCommerce.Controllers.api.PaymentGatewayWebServiceController	82
FlexewebCommerce.Controllers.api.PostcodeWebServiceController	86
FlexewebCommerce.Controllers.api.PromotionWebServiceController	93
FlexewebCommerce.Controllers.api.SecurityWebServiceController	97
FlexewebCommerce.Controllers.api.TestController	106
ApplicationEventHandler	
FlexewebCommerce.Umbraco.App_EventHandler.Events.SavedEvent	96
FlexewebCommerce.Umbraco.App_EventHandler.Events.SavingEvent	96
FlexewebCommerce.Umbraco.App_EventHandler.Events.TrashedEvent	114
FlexewebCommerce.Umbraco.App_EventHandler.Events.TreeEvent	114
FlexewebCommerce.Models.Catalogue	36
FlexewebCommerce.BusinessLogic.Catalogue	36
FlexewebCommerce.Services.Catalogue.CatalogueXSLTService	39
FlexewebCommerce.Models.Category	39
FlexewebCommerce.Umbraco.Content.PropertyEditorTypes.CategorySelector	40
ConfigurationElement	
FlexewebCommerce.Config.TabElement	104
FlexewebCommerce.GoalsElement	65
FlexewebCommerce.RewardsElement	94
ConfigurationElementCollection	
FlexewebCommerce.Config.AdminUISectionCollection	30
FlexewebCommerce.Config.AdminUISectionTabCollection	31
FlexewebCommerce.Config.GoalsElementCollection	66

FlexwebCommerce.Config.RewardsElementCollection	94
ConfigurationSection	
FlexwebCommerce.Config.AdminUISection	30
FlexwebCommerce.Config.PromotionsSection	93
FlexwebCommerce.Config.ServicesSection	97
ConfigurationValidatorBase	
FlexwebCommerce.Config.AdminUISettingsValidation	32
FlexwebCommerce.Config.SectionsSettingsValidation	96
FlexwebCommerce.Config.TabsSettingsValidation	104
Controller	
FlexwebCommerce.Services.Catalogue.CatalogueController	36
FlexwebCommerce.Models.Country	42
FlexwebCommerce.Models.Coupon	42
FlexwebCommerce.Models.Currency	43
FlexwebCommerce.Services.Currency.CurrencyXSLTService	44
FlexwebCommerce.Models.Customer	45
FlexwebCommerce.Data Types.DataType	49
DbContext	
FlexwebCommerce.Services.Address.SqlAddressProvider.dbContext	51
FlexwebCommerce.Services.Currency.SqlCurrencyProvider.dbContext	52
FlexwebCommerce.Services.Customer.SqlCustomerProvider.dbContext	52
FlexwebCommerce.Services.Fulfillment.BandedFulfillmentProvider.dbContext	53
FlexwebCommerce.Services.Inventory.SqlInventoryProvider.dbContext	49
FlexwebCommerce.Services.Orders.SqlOrderProvider.dbContext	50
FlexwebCommerce.Services.Promotion.StandardPromotionProvider.dbContext	51
FlexwebCommerce.Services.Transaction.SqlTransactionProvider.TransactionContext	112
Manav.Models.Checkout.DeliveryViewModel	53
FlexwebCommerce.Models.Discount	54
FlexwebCommerce.Models.EcommerceEnums	55
ezTweet	55
FlexwebCommerce.FilterConfig	56
FlexwebCommerce.Umbraco.FilterConfig	56
FlexwebCommerce.Umbraco.Content.flxCataloguesData	57
FlexwebCommerce.Umbraco.Content.flxMarketingData	58
FlexwebCommerce.Umbraco.Content.flxOrdersData	59
FlexwebCommerce.Umbraco.Content.flxReportsData	60
FlexwebCommerce.Umbraco.Content.flxSettingsData	60
FlexwebCommerce.Umbraco.Admin.Interfaces.FlxTreeController	61
FlexwebCommerce.Umbraco.Admin.UI.FlxCatalogueTree	58
FlexwebCommerce.Umbraco.Admin.UI.FlxOrderTree	59
FlexwebCommerce.Umbraco.Admin.UI.FlxPromotionTree	60
FlexwebCommerce.Umbraco.Admin.Models.FlxTreeNode	61
FlexwebCommerce.Services.Messaging.FtpClient	62
FlexwebCommerce.Services.Messaging.FtpState	62
FlexwebCommerce.Models.FulfillmentOption	63
FlexwebCommerce.Models.FulfillmentRestriction	64
FlexwebCommerce.BusinessLogic.Messaging.GenerateDictionary	65
FlexwebCommerce.Umbraco.Resolvers.hasChildrenResolver	66
FlexwebCommerce.Services.Fulfillment.HttpRequestHandler	66
IApplication	
FlexwebCommerce.Umbraco.Content.flxCommerceApplication	58
IApplicationEventHandler	
FlexwebCommerce.Umbraco.App_EventHandler.Events.StartedEvent	103
Our.Umbraco.ezSearch.ezSearchBoostrapper	55
ICompiledExpressionRoot	
FlexwebCommerce.Basket	33
FlexwebCommerce.WorkFlows.Checkout	40
FlexwebCommerce.Services.Import.ImportService	67

FlexwebCommerce.Models.Inventory	68
FlexwebCommerce.Services.Inventory.InventoryXSLTService	70
ISupportInitialize	
FlexwebCommerce.Basket	33
FlexwebCommerce.Basket	33
FlexwebCommerce.WorkFlows.Checkout	40
FlexwebCommerce.WorkFlows.Checkout	40
FlexwebCommerce.Licensing	70
FlexwebCommerce.Umbraco.Resolvers.MapUmbracoToModelResolver< T >	70
FlexwebCommerce.Models.MarketingCampaign	71
FlexwebCommerce.Messages	71
FlexwebCommerce.Models.Order	72
FlexwebCommerce.Models.OrderLine	73
FlexwebCommerce.Models.OrderNote	74
FlexwebCommerce.Services.Orders.OrderService	77
FlexwebCommerce.Models.OrderShipment	78
FlexwebCommerce.Models.OrderStatus	78
FlexwebCommerce.Services.Promotion.OrderXSLTService	79
FlexwebCommerce.Services.Orders.OrderXSLTService	79
FlexwebCommerce.Models.PackageInfo	80
FlexwebCommerce.Models.PaymentGateway	81
FlexwebCommerce.Services.Payment.PaymentService	83
FlexwebCommerce.Services.Payment.PaymentXSLTService	84
FlexwebCommerce.Models.PostalZone	85
FlexwebCommerce.Services.Postcode.PostcodeService	86
FlexwebCommerce.Models.Product	87
FlexwebCommerce.Umbraco.Content.PropertyEditorTypes.ProductSelector	88
FlexwebCommerce.Models.Promotion	88
FlexwebCommerce.Models.PromotionGoal	89
FlexwebCommerce.BusinessLogic.Promotions.Goals.BuyBundle	34
FlexwebCommerce.BusinessLogic.Promotions.Goals.BuyXfromCategory	35
FlexwebCommerce.BusinessLogic.Promotions.Goals.BuyXofProduct	35
FlexwebCommerce.BusinessLogic.Promotions.Goals.CouponCode	42
FlexwebCommerce.BusinessLogic.Promotions.Goals.SpendMoreThan	98
FlexwebCommerce.Models.PromotionReward	91
FlexwebCommerce.BusinessLogic.Promotions.Rewards.AmountOffOrder	32
FlexwebCommerce.BusinessLogic.Promotions.Rewards.AmountOffOrderLine	33
FlexwebCommerce.BusinessLogic.Promotions.Rewards.FixedRateDiscount	56
FlexwebCommerce.BusinessLogic.Promotions.Rewards.FreeProduct	62
FlexwebCommerce.BusinessLogic.Promotions.Rewards.PercentOffOrder	84
FlexwebCommerce.BusinessLogic.Promotions.Rewards.PercentOffOrderLine	84
FlexwebCommerce.Services.Promotion.PromotionService	92
ProviderBase	
FlexwebCommerce.Services.Address.AddressProvider	25
FlexwebCommerce.Services.Catalogue.CatalogueProvider	37
FlexwebCommerce.Services.DropShipment.DropShipmentProvider	54
FlexwebCommerce.Services.Import.ImportProvider	67
FlexwebCommerce.Services.Inventory.InventoryProvider	68
FlexwebCommerce.Services.Inventory.SqlInventoryProvider	98
FlexwebCommerce.Services.Inventory.SqlSpInventoryProvider	99
FlexwebCommerce.Services.Orders.OrderProvider	75
FlexwebCommerce.Services.Orders.SqlSpOrderProvider	100
FlexwebCommerce.Services.Orders.SqlSpOrderProvider	100
FlexwebCommerce.Services.Payment.PaymentProvider	83
FlexwebCommerce.Services.Postcode.PostcodeProvider	85
FlexwebCommerce.Services.Promotion.PromotionProvider	90
FlexwebCommerce.Services.Tax.TaxProvider	105
FlexwebCommerce.Services.Transaction.TransactionProvider	113

ProviderBase	
FlexewebCommerce.Services.Currency.CurrencyProvider	43
FlexewebCommerce.Services.Customer.CustomerProvider	45
FlexewebCommerce.Services.Fulfillment.FulfillmentProvider	63
FlexewebCommerce.Services.Payment.PaymentGatewayProvider	81
ProviderCollection	
FlexewebCommerce.Services.Fulfillment.FulfillmentProviderCollection	64
FlexewebCommerce.Services.Import.ImportProviderCollection	67
FlexewebCommerce.Services.Payment.PaymentProviderCollection	83
FlexewebCommerce.Services.Postcode.PostcodeProviderCollection	86
FlexewebCommerce.Services.Transaction.TransactionProviderCollection	113
ProviderCollection	
FlexewebCommerce.Services.Address.AddressProviderCollection	26
FlexewebCommerce.Services.Catalogue.CatalogueProviderCollection	39
FlexewebCommerce.Services.Currency.CurrencyProviderCollection	44
FlexewebCommerce.Services.Customer.CustomerProviderCollection	46
FlexewebCommerce.Services.DropShipment.DropShipmentProviderCollection	54
FlexewebCommerce.Services.Inventory.InventoryProviderCollection	69
FlexewebCommerce.Services.Orders.OrderProviderCollection	76
FlexewebCommerce.Services.Payment.PaymentGatewayProviderCollection	82
FlexewebCommerce.Services.Promotion.PromotionProviderCollection	91
FlexewebCommerce.Services.Tax.TaxProviderCollection	105
FlexewebCommerce.Services.ProviderUtils	94
FlexewebCommerce.Umbraco.Admin.UI.RootNodeKey	95
FlexewebCommerce.Umbraco.RouteConfig	95
FlexewebCommerce.RouteConfig	95
Manav.Models.Checkout.StartCheckoutViewModel	103
SurfaceController	
Manav.Controllers.CheckoutSurfaceController	41
FlexewebCommerce.Services.Tax.TaxService	106
FlexewebCommerce.Services.Tax.TaxXSLTService	106
tmhOAuth	107
tmhUtilities	109
FlexewebCommerce.Models.Transaction	112
FlexewebCommerce.Services.Transaction.TransactionService	113
FlexewebCommerce.Models.TransactionType	114
TreeController	
FlexewebCommerce.Umbraco.Controllers.Trees.flxTreeController	61
TypeConverter	
FlexewebCommerce.PromotionGoalTypeConverter	89
UmbracoApiController	
FlexewebCommerce.Umbraco.Controllers.api.CatalogueController	37

Chapter 3

Class Index

3.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

FlexwebCommerce.Models.Address	25
FlexwebCommerce.Services.Address.AddressProvider	25
FlexwebCommerce.Services.Address.AddressProviderCollection	26
FlexwebCommerce.Services.Address.AddressService	26
FlexwebCommerce.Controllers.api.AddressWebServiceController	
AddressWebServiceController provides control for address using webapi	27
FlexwebCommerce.Config.AdminUISection	30
FlexwebCommerce.Config.AdminUISectionCollection	30
FlexwebCommerce.Config.AdminUISectionTabCollection	31
FlexwebCommerce.Config.AdminUISettingsValidation	32
FlexwebCommerce.BusinessLogic.Promotions.Rewards.AmountOffOrder	32
FlexwebCommerce.BusinessLogic.Promotions.Rewards.AmountOffOrderLine	33
FlexwebCommerce.Basket	33
FlexwebCommerce.BusinessLogic.Promotions.Goals.BuyBundle	34
FlexwebCommerce.BusinessLogic.Promotions.Goals.BuyXfromCategory	35
FlexwebCommerce.BusinessLogic.Promotions.Goals.BuyXofProduct	35
FlexwebCommerce.Models.Catalogue	36
FlexwebCommerce.BusinessLogic.Catalogue	36
FlexwebCommerce.Services.Catalogue.CatalogueController	36
FlexwebCommerce.Umbraco.Controllers.api.CatalogueController	37
FlexwebCommerce.Services.Catalogue.CatalogueProvider	37
FlexwebCommerce.Services.Catalogue.CatalogueProviderCollection	39
FlexwebCommerce.Services.Catalogue.CatalogueXSLTService	39
FlexwebCommerce.Models.Category	39
FlexwebCommerce.Umbraco.Content.PropertyEditorTypes.CategorySelector	40
FlexwebCommerce.WorkFlows.Checkout	40
Manav.Controllers.CheckoutSurfaceController	41
FlexwebCommerce.Controllers.api.CheckoutWebServiceController	41
FlexwebCommerce.Models.Country	42
FlexwebCommerce.Models.Coupon	42
FlexwebCommerce.BusinessLogic.Promotions.Goals.CouponCode	42
FlexwebCommerce.Models.Currency	43
FlexwebCommerce.Services.Currency.CurrencyProvider	43
FlexwebCommerce.Services.Currency.CurrencyProviderCollection	44
FlexwebCommerce.Services.Currency.CurrencyXSLTService	44
FlexwebCommerce.Models.Customer	45
FlexwebCommerce.Services.Customer.CustomerProvider	45

FlexwebCommerce.Services.Customer.CustomerProviderCollection	46
FlexwebCommerce.Controllers.api.CustomerWebServiceController	
CustomerWebServiceController provides control for customer using webapi	46
FlexwebCommerce.DataTypes.DataType	49
FlexwebCommerce.Services.Inventory.SqlInventoryProvider.dbContext	49
FlexwebCommerce.Services.Orders.SqlOrderProvider.dbContext	50
FlexwebCommerce.Services.Address.SqlAddressProvider.dbContext	51
FlexwebCommerce.Services.Promotion.StandardPromotionProvider.dbContext	51
FlexwebCommerce.Services.Currency.SqlCurrencyProvider.dbContext	52
FlexwebCommerce.Services.Customer.SqlCustomerProvider.dbContext	52
FlexwebCommerce.Services.Fulfillment.BandedFulfillmentProvider.dbContext	53
Manav.Models.Checkout.DeliveryViewModel	53
FlexwebCommerce.Models.Discount	54
FlexwebCommerce.Services.DropShipment.DropShipmentProvider	54
FlexwebCommerce.Services.DropShipment.DropShipmentProviderCollection	54
FlexwebCommerce.Models.EcommerceEnums	55
Our.Umbraco.ezSearch.ezSearchBoostrapper	55
ezTweet	55
FlexwebCommerce.FilterConfig	56
FlexwebCommerce.Umbraco.FilterConfig	56
FlexwebCommerce.BusinessLogic.Promotions.Rewards.FixedRateDiscount	56
FlexwebCommerce.Umbraco.Content.flxCataloguesData	57
FlexwebCommerce.Umbraco.Admin.UI.FlxCatalogueTree	58
FlexwebCommerce.Umbraco.Content.flxCommerceApplication	58
FlexwebCommerce.Umbraco.Content.flxMarketingData	58
FlexwebCommerce.Umbraco.Content.flxOrdersData	59
FlexwebCommerce.Umbraco.Admin.UI.FlxOrderTree	59
FlexwebCommerce.Umbraco.Admin.UI.FlxPromotionTree	60
FlexwebCommerce.Umbraco.Content.flxReportsData	60
FlexwebCommerce.Umbraco.Content.flxSettingsData	60
FlexwebCommerce.Umbraco.Admin.Interfaces.FlxTreeController	61
FlexwebCommerce.Umbraco.Controllers.Trees.flxTreeController	61
FlexwebCommerce.Umbraco.Admin.Models.FlxTreeNode	61
FlexwebCommerce.BusinessLogic.Promotions.Rewards.FreeProduct	62
FlexwebCommerce.Services.Messaging.FtpClient	62
FlexwebCommerce.Services.Messaging.FtpState	62
FlexwebCommerce.Models.FulfillmentOption	63
FlexwebCommerce.Services.Fulfillment.FulfillmentProvider	63
FlexwebCommerce.Services.Fulfillment.FulfillmentProviderCollection	64
FlexwebCommerce.Models.FulfillmentRestriction	64
FlexwebCommerce.Controllers.api.FulfillmentWebServiceController	65
FlexwebCommerce.BusinessLogic.Messaging.GenerateDictionary	65
FlexwebCommerce.GoalsElement	65
FlexwebCommerce.Config.GoalsElementCollection	66
FlexwebCommerce.Umbraco.Resolvers.hasChildrenResolver	66
FlexwebCommerce.Services.Fulfillment.HttpRequestHandler	66
FlexwebCommerce.Services.Import.ImportProvider	67
FlexwebCommerce.Services.Import.ImportProviderCollection	67
FlexwebCommerce.Services.Import.ImportService	67
FlexwebCommerce.Controllers.api.ImportWebServiceController	67
FlexwebCommerce.Models.Inventory	68
FlexwebCommerce.Services.Inventory.InventoryProvider	68
FlexwebCommerce.Services.Inventory.InventoryProviderCollection	69
FlexwebCommerce.Controllers.api.InventoryWebServiceController	70
FlexwebCommerce.Services.Inventory.InventoryXSLTService	70
FlexwebCommerce.Licensing	70
FlexwebCommerce.Umbraco.Resolvers.MapUmbracoToModelResolver< T >	70
FlexwebCommerce.Models.MarketingCampaign	71

FlexwebCommerce.Messages	71
FlexwebCommerce.Models.Order	72
FlexwebCommerce.Models.OrderLine	73
FlexwebCommerce.Models.OrderNote	74
FlexwebCommerce.Services.Orders.OrderProvider	75
FlexwebCommerce.Services.Orders.OrderProviderCollection	76
FlexwebCommerce.Services.Orders.OrderService	77
FlexwebCommerce.Models.OrderShipment	78
FlexwebCommerce.Models.OrderStatus	78
FlexwebCommerce.Controllers.api.OrderWebServiceController	79
FlexwebCommerce.Services.Promotion.OrderXSLTService	79
FlexwebCommerce.Services.Orders.OrderXSLTService	79
FlexwebCommerce.Models.PackageInfo	80
FlexwebCommerce.Models.PaymentGateway	81
FlexwebCommerce.Services.Payment.PaymentGatewayProvider	81
FlexwebCommerce.Services.Payment.PaymentGatewayProviderCollection	82
FlexwebCommerce.Controllers.api.PaymentGatewayWebServiceController	82
FlexwebCommerce.Services.Payment.PaymentProvider	83
FlexwebCommerce.Services.Payment.PaymentProviderCollection	83
FlexwebCommerce.Services.Payment.PaymentService	83
FlexwebCommerce.Services.Payment.PaymentXSLTService	84
FlexwebCommerce.BusinessLogic.Promotions.Rewards.PercentOffOrder	84
FlexwebCommerce.BusinessLogic.Promotions.Rewards.PercentOffOrderLine	84
FlexwebCommerce.Models.PostalZone	85
FlexwebCommerce.Services.Postcode.PostcodeProvider	85
FlexwebCommerce.Services.Postcode.PostcodeProviderCollection	86
FlexwebCommerce.Services.Postcode.PostcodeService	86
FlexwebCommerce.Controllers.api.PostcodeWebServiceController	
PostcodeWebServiceController provides control for postcodes using webapi	86
FlexwebCommerce.Models.Product	87
FlexwebCommerce.Umbraco.Content.PropertyEditorTypes.ProductSelector	88
FlexwebCommerce.Models.Promotion	88
FlexwebCommerce.Models.PromotionGoal	89
FlexwebCommerce.PromotionGoalTypeConverter	89
FlexwebCommerce.Services.Promotion.PromotionProvider	90
FlexwebCommerce.Services.Promotion.PromotionProviderCollection	91
FlexwebCommerce.Models.PromotionReward	91
FlexwebCommerce.Services.Promotion.PromotionService	92
FlexwebCommerce.Config.PromotionsSection	93
FlexwebCommerce.Controllers.api.PromotionWebServiceController	93
FlexwebCommerce.Services.ProviderUtils	94
FlexwebCommerce.RewardsElement	94
FlexwebCommerce.Config.RewardsElementCollection	94
FlexwebCommerce.Umbraco.Admin.UI.RootNodeKey	95
FlexwebCommerce.Umbraco.RouteConfig	95
FlexwebCommerce.RouteConfig	95
FlexwebCommerce.Umbraco.App_EventHandler.Events.SavedEvent	96
FlexwebCommerce.Umbraco.App_EventHandler.Events.SavingEvent	96
FlexwebCommerce.Config.SectionsSettingsValidation	
96	
FlexwebCommerce.Controllers.api.SecurityWebServiceController	97
FlexwebCommerce.Config.ServicesSection	97
FlexwebCommerce.BusinessLogic.Promotions.Goals.SpendMoreThan	98
FlexwebCommerce.Services.Inventory.SqlInventoryProvider	98
FlexwebCommerce.Services.Inventory.SqlSpInventoryProvider	99
FlexwebCommerce.Services.Orders.SqlSpOrderProvider	100
Manav.Models.Checkout.StartCheckoutViewModel	103
FlexwebCommerce.Umbraco.App_EventHandler.Events.StartedEvent	103

FlexwebCommerce.Config.TabElement	104
FlexwebCommerce.Config.TabsSettingsValidation	104
FlexwebCommerce.Services.Tax.TaxProvider	105
FlexwebCommerce.Services.Tax.TaxProviderCollection	105
FlexwebCommerce.Services.Tax.TaxService	106
FlexwebCommerce.Services.Tax.TaxXSLTService	106
FlexwebCommerce.Controllers.api.TestController	106
tmhOAuth	107
tmhUtilities	109
FlexwebCommerce.Models.Transaction	112
FlexwebCommerce.Services.Transaction.SqlTransactionProvider.TransactionContext	112
FlexwebCommerce.Services.Transaction.TransactionProvider	113
FlexwebCommerce.Services.Transaction.TransactionProviderCollection	113
FlexwebCommerce.Services.Transaction.TransactionService	113
FlexwebCommerce.Models.TransactionType	114
FlexwebCommerce.Umbraco.App_EventHandler.Events.TrashedEvent	114
FlexwebCommerce.Umbraco.App_EventHandler.Events.TreeEvent	114

Chapter 4

Namespace Documentation

4.1 Package ConfigCommerce

Namespaces

- package [Properties](#)

4.2 Package ConfigCommerce.Properties

Classes

- class **Resources**
A strongly-typed resource class, for looking up localized strings, etc.

4.3 Package FlexwebCommerce

Namespaces

- package [BusinessLogic](#)
- package [Config](#)
- package [Controllers](#)
- package [DataTypes](#)
- package [FulfillmentContextMigrations](#)
- package [Models](#)
- package [OrderContextMigrations](#)
- package [PromotionContextMigrations](#)
- package [Services](#)
- package [TransactionContextMigrations](#)
- package [Umbraco](#)
- package [WorkFlows](#)

Classes

- class [Basket](#)
- class [FilterConfig](#)
- class [GoalsElement](#)
- class [Licensing](#)

- class [Messages](#)
- class [PromotionGoalTypeConverter](#)
- class [RewardsElement](#)
- class [RouteConfig](#)
- class **WebApiConfig**

4.4 Package FlexwebCommerce.BusinessLogic

Namespaces

- package [Messaging](#)
- package [Promotions](#)

Classes

- class [Catalogue](#)

4.5 Package FlexwebCommerce.BusinessLogic.Messaging

Classes

- class [GenerateDictionary](#)

4.6 Package FlexwebCommerce.BusinessLogic.Promotions

Namespaces

- package [Goals](#)
- package [Rewards](#)

4.7 Package FlexwebCommerce.BusinessLogic.Promotions.Goals

Classes

- class [BuyBundle](#)
- class [BuyXfromCategory](#)
- class [BuyXofProduct](#)
- class [CouponCode](#)
- class [SpendMoreThan](#)

4.8 Package FlexwebCommerce.BusinessLogic.Promotions.Rewards

Classes

- class [AmountOffOrder](#)
- class [AmountOffOrderLine](#)
- class [FixedRateDiscount](#)
- class [FreeProduct](#)

- class [PercentOffOrder](#)
- class [PercentOffOrderLine](#)

4.9 Package FlexwebCommerce.Config

Classes

- class [AdminUISection](#)
- class [AdminUISectionCollection](#)
- class [AdminUISectionTabCollection](#)
- class [AdminUISettingsValidation](#)
- class [GoalsElementCollection](#)
- class [PromotionsSection](#)
- class [RewardsElementCollection](#)
- class [SectionsSettingsValidation](#)
- class [ServicesSection](#)
- class [TabElement](#)
- class [TabsSettingsValidation](#)

4.10 Package FlexwebCommerce.Controllers

Namespaces

- package [api](#)

4.11 Package FlexwebCommerce.Controllers.api

Classes

- class [AddressWebServiceController](#)
AddressWebServiceController provides control for address using webapi
- class [CheckoutWebServiceController](#)
- class [CustomerWebServiceController](#)
CustomerWebServiceController provides control for customer using webapi
- class [FulfillmentWebServiceController](#)
- class [ImportWebServiceController](#)
- class [InventoryWebServiceController](#)
- class [OrderWebServiceController](#)
- class [PaymentGatewayWebServiceController](#)
- class [PostcodeWebServiceController](#)
PostcodeWebServiceController provides control for postcodes using webapi
- class [PromotionWebServiceController](#)
- class [SecurityWebServiceController](#)
- class [TestController](#)

4.12 Package FlexwebCommerce.DataTypes

Classes

- class [DataType](#)

4.13 Package FlexwebCommerce.FulfillmentContextMigrations

Classes

- class **Configuration**

4.14 Package FlexwebCommerce.Models

Classes

- class [Address](#)
- class [Catalogue](#)
- class [Category](#)
- class [Country](#)
- class [Coupon](#)
- class [Currency](#)
- class [Customer](#)
- class [Discount](#)
- class [EcommerceEnums](#)
- class [FulfillmentOption](#)
- class [FulfillmentRestriction](#)
- class [Inventory](#)
- class [MarketingCampaign](#)
- class [Order](#)
- class [OrderLine](#)
- class [OrderNote](#)
- class [OrderShipment](#)
- class [OrderStatus](#)
- class [PackageInfo](#)
- class [PaymentGateway](#)
- class [PostalZone](#)
- class [Product](#)
- class [Promotion](#)
- class [PromotionGoal](#)
- class [PromotionReward](#)
- class [Transaction](#)
- class [TransactionType](#)

Enumerations

- enum **FulfillmentType** {
 Ground, **Air**, **Freight**, **Download**,
 None }

4.15 Package FlexwebCommerce.OrderContextMigrations

Classes

- class **Configuration**

4.16 Package FlexwebCommerce.PromotionContextMigrations

Classes

- class **Configuration**

4.17 Package FlexwebCommerce.Services

Namespaces

- package [Address](#)
- package [Catalogue](#)
- package [Currency](#)
- package [Customer](#)
- package [DropShipment](#)
- package [Fulfillment](#)
- package [Import](#)
- package [Inventory](#)
- package [Messaging](#)
- package [Orders](#)
- package [Payment](#)
- package [Postcode](#)
- package [Promotion](#)
- package [Tax](#)
- package [Transaction](#)

Classes

- class [ProviderUtils](#)

4.18 Package FlexwebCommerce.Services.Address

Classes

- class [AddressProvider](#)
- class [AddressProviderCollection](#)
- class [AddressService](#)
- class **AddressServiceSection**
- class **SqlAddressProvider**

4.19 Package FlexwebCommerce.Services.Catalogue

Classes

- class [CatalogueController](#)
- class [CatalogueProvider](#)
- class [CatalogueProviderCollection](#)
- class **CatalogueService**
- class **CatalogueServiceSection**
- class [CatalogueXSLTService](#)

4.20 Package FlexwebCommerce.Services.Currency

Classes

- class [CurrencyProvider](#)
- class [CurrencyProviderCollection](#)
- class **CurrencyService**
- class **CurrencyServiceSection**
- class [CurrencyXSLTService](#)
- class **SqlCurrencyProvider**
- class **SqlSpCurrencyProvider**

4.21 Package FlexwebCommerce.Services.Customer

Classes

- class [CustomerProvider](#)
- class [CustomerProviderCollection](#)
- class **CustomerService**
- class **CustomerServiceSection**
- class **SqlCustomerProvider**

4.22 Package FlexwebCommerce.Services.DropShipment

Classes

- class [DropShipmentProvider](#)
- class [DropShipmentProviderCollection](#)
- class **DropShipmentSection**
- class **DropShipmentService**

4.23 Package FlexwebCommerce.Services.Fulfillment

Classes

- class **BandedFulfillmentProvider**
- class [FulfillmentProvider](#)
- class [FulfillmentProviderCollection](#)
- class **FulfillmentService**
- class **FulfillmentServiceSection**
- class [HttpRequestHandler](#)

4.24 Package FlexwebCommerce.Services.Import

Classes

- class **CskImportProvider**
- class [ImportProvider](#)
- class [ImportProviderCollection](#)
- class [ImportService](#)
- class **ImportServiceSection**

4.25 Package FlexwebCommerce.Services.Inventory

Classes

- class [InventoryProvider](#)
- class [InventoryProviderCollection](#)
- class **InventoryService**
- class **InventoryServiceSection**
- class [InventoryXSLTService](#)
- class **SimpleInventoryProvider**
- class [SqlInventoryProvider](#)
- class [SqlSpInventoryProvider](#)

4.26 Package FlexwebCommerce.Services.Messaging

Classes

- class [FtpClient](#)
- class [FtpState](#)

4.27 Package FlexwebCommerce.Services.Orders

Classes

- class [OrderProvider](#)
- class [OrderProviderCollection](#)
- class [OrderService](#)
- class **OrdersServiceSection**
- class [OrderXSLTService](#)
- class **SqlOrderProvider**
- class [SqlSpOrderProvider](#)

4.28 Package FlexwebCommerce.Services.Payment

Classes

- class [PaymentGatewayProvider](#)
- class [PaymentGatewayProviderCollection](#)
- class **PaymentGatewayService**
- class [PaymentProvider](#)
- class [PaymentProviderCollection](#)
- class [PaymentService](#)
- class **PaymentServiceSection**
- class [PaymentXSLTService](#)
- class **PayPalPaymentGatewayProvider**
- class **SagePayPaymentGatewayProvider**
- class **SagePayPaymentProvider**

4.29 Package FlexwebCommerce.Services.Postcode

Classes

- class [PostcodeProvider](#)
- class [PostcodeProviderCollection](#)
- class **Postcodes4uPostcodeProvider**
- class [PostcodeService](#)
- class **PostcodeServiceSection**

4.30 Package FlexwebCommerce.Services.Promotion

Classes

- class [OrderXSLTService](#)
- class [PromotionProvider](#)
- class [PromotionProviderCollection](#)
- class [PromotionService](#)
- class **PromotionServiceSection**
- class **StandardPromotionProvider**

4.31 Package FlexwebCommerce.Services.Tax

Classes

- class **SimpleFlatRateTaxProvider**
- class **SqlBasicTaxProvider**
- class [TaxProvider](#)
- class [TaxProviderCollection](#)
- class [TaxService](#)
- class **TaxServiceSection**
- class [TaxXSLTService](#)

4.32 Package FlexwebCommerce.Services.Transaction

Classes

- class **SqlTransactionProvider**
- class [TransactionProvider](#)
- class [TransactionProviderCollection](#)
- class [TransactionService](#)
- class **TransactionServiceSection**

4.33 Package FlexwebCommerce.TransactionContextMigrations

Classes

- class **Configuration**

4.34 Package FlexwebCommerce.Umbraco

Namespaces

- package [Admin](#)
- package [App_EventHandler](#)
- package [Content](#)
- package [Controllers](#)
- package [Resolvers](#)
- package [Services](#)

Classes

- class [FilterConfig](#)
- class [RouteConfig](#)
- class [WebApiConfig](#)

4.35 Package FlexwebCommerce.Umbraco.Admin

Namespaces

- package [Interfaces](#)
- package [Models](#)
- package [UI](#)

4.36 Package FlexwebCommerce.Umbraco.Admin.Interfaces

Classes

- class [FlxTreeController](#)

4.37 Package FlexwebCommerce.Umbraco.Admin.Models

Classes

- class [FlxTreeNode](#)

4.38 Package FlexwebCommerce.Umbraco.Admin.UI

Classes

- class [FlxCatalogueTree](#)
- class [FlxOrderTree](#)
- class [FlxPromotionTree](#)
- class [RootNodeKey](#)

4.39 Package FlexwebCommerce.Umbraco.App_EventHandler

Namespaces

- package [Events](#)

4.40 Package FlexwebCommerce.Umbraco.App_EventHandler.Events

Classes

- class [SavedEvent](#)
- class [SavingEvent](#)
- class [StartedEvent](#)
- class [TrashedEvent](#)
- class [TreeEvent](#)

4.41 Package FlexwebCommerce.Umbraco.Content

Namespaces

- package [PropertyEditorTypes](#)

Classes

- class [flxCataloguesData](#)
- class [flxCommerceApplication](#)
- class [flxMarketingData](#)
- class [flxOrdersData](#)
- class [flxReportsData](#)
- class [flxSettingsData](#)

4.42 Package FlexwebCommerce.Umbraco.Content.PropertyEditorTypes

Classes

- class [CategorySelector](#)
- class [ProductSelector](#)

4.43 Package FlexwebCommerce.Umbraco.Controllers

Namespaces

- package [api](#)
- package [Trees](#)

4.44 Package FlexwebCommerce.Umbraco.Controllers.api

Classes

- class [CatalogueController](#)

4.45 Package FlexwebCommerce.Umbraco.Controllers.Trees

Classes

- class [flxTreeController](#)

4.46 Package FlexwebCommerce.Umbraco.Resolvers

Classes

- class [hasChildrenResolver](#)
- class [MapUmbracoToModelResolver](#)

4.47 Package FlexwebCommerce.Umbraco.Services

Namespaces

- package [Catalogue](#)
- package [Customer](#)
- package [Logging](#)
- package [Messaging](#)
- package [Security](#)

4.48 Package FlexwebCommerce.Umbraco.Services.Catalogue

Classes

- class **UmbracoCatalogueProvider**

4.49 Package FlexwebCommerce.Umbraco.Services.Customer

Classes

- class **UmbracoCustomerProvider**

4.50 Package FlexwebCommerce.Umbraco.Services.Logging

Classes

- class **UmbracoLoggingProvider**

4.51 Package FlexwebCommerce.Umbraco.Services.Messaging

Classes

- class **UmbracoCommerceMessagingProvider**

4.52 Package FlexwebCommerce.Umbraco.Services.Security

Classes

- class **UmbracoSecurityProvider**

4.53 Package FlexwebCommerce.WorkFlows

Classes

- class [Checkout](#)

4.54 Package Manav

Namespaces

- package [Controllers](#)
- package [Models](#)

4.55 Package Manav.Controllers

Classes

- class [CheckoutSurfaceController](#)

4.56 Package Manav.Models

Namespaces

- package [Checkout](#)

4.57 Package Manav.Models.Checkout

Classes

- class [DeliveryViewModel](#)
- class [StartCheckoutViewModel](#)

4.58 Package My

Classes

- class **Settings**

4.59 Package Our

Namespaces

- package [Umbraco](#)

4.60 Package Our.Umbraco

Namespaces

- package [ezSearch](#)

4.61 Package Our.Umbraco.ezSearch

Classes

- class [ezSearchBoostrapper](#)

4.62 Package XamlStaticHelperNamespace

Classes

- class **_XamlStaticHelper**

Chapter 5

Class Documentation

5.1 FlexwebCommerce.Models.Address Class Reference

Public Attributes

- `DataTypeAttributes Attributes = new DataTypeAttributes()`

Properties


- `int AddressID [get, set]`
- `bool IsBillingDefault [get, set]`
- `bool IsShippingDefault [get, set]`
- `string UserName [get, set]`
- `string FirstName [get, set]`
- `string LastName [get, set]`
- `string Phone [get, set]`
- `virtual Customer Customer [get, set]`
- `string Address1 [get, set]`
- `string Address2 [get, set]`
- `string City [get, set]`
- `string CountyState [get, set]`
- `string Country [get, set]`
- `string ZipCode [get, set]`
- `DateTime CreatedOn [get, set]`
- `string CreatedBy [get, set]`
- `DateTime ModifiedOn [get, set]`
- `string ModifiedBy [get, set]`

The documentation for this class was generated from the following file:

- `FlexwebCommerce/Models/Address.cs`

5.2 FlexwebCommerce.Services.Address.AddressProvider Class Reference

Inheritance diagram for `FlexwebCommerce.Services.Address.AddressProvider`:

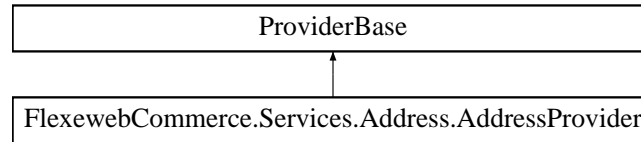

Public Member Functions

- abstract [Models.Address](#) **GetAddress** (int addressId)
- abstract IEnumerable< [Models.Address](#) > **GetAllAddresses** ()
- abstract IEnumerable< [Models.Address](#) > **GetCurrentCustomerAddresses** ()
- abstract IEnumerable< [Models.Address](#) > **GetCustomerAddresses** (Guid userId)
- abstract IEnumerable< [Models.Address](#) > **GetCustomerAddresses** (string userName)
- abstract [Models.Address](#) **GetCurrentCustomerDefaultBillingAddress** ()
- abstract [Models.Address](#) **GetCurrentCustomerDefaultShippingAddress** ()
- abstract [Models.Address](#) **CreateAddress** (bool isBillingDefault, bool isShippingDefault, string userName, string firstName, string lastName, string phone, string address1, string address2, string city, string county↔ State, string country, string zipCode, DateTime createdOn, string createdBy, DateTime modifiedOn, string modifiedBy)
- abstract [Models.Address](#) **CreateAddress** ([Models.Address](#) address)
- abstract void **DeleteAddress** ([Models.Address](#) address)
- abstract void **DeleteAddress** (int addressId)
- abstract void **UpdateAddress** ([Models.Address](#) address)

Properties


- abstract bool **IsActive** [get, set]

The documentation for this class was generated from the following file:

- FlexewebCommerce/Services/Address/AddressProvider.cs

5.3 FlexewebCommerce.Services.Address.AddressProviderCollection Class Reference

Inheritance diagram for FlexewebCommerce.Services.Address.AddressProviderCollection:

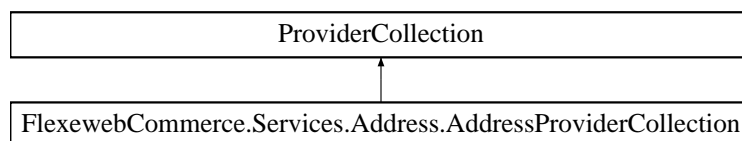

The documentation for this class was generated from the following file:

- FlexewebCommerce/Services/Address/AddressProvider.cs

5.4 FlexewebCommerce.Services.Address.AddressService Class Reference

Static Public Member Functions

- static [Models.Address](#) **GetAddress** (int addressId)

- static IEnumerable< [Models.Address](#) > **GetAllAddresses** ()
- static IEnumerable< [Models.Address](#) > **GetCurrentCustomerAddresses** ()
- static IEnumerable< [Models.Address](#) > **GetCustomerAddresses** (Guid userId)
- static IEnumerable< [Models.Address](#) > **GetCustomerAddresses** (string userName)
- static [Models.Address](#) **GetCurrentCustomerDefaultBillingAddress** ()
- static [Models.Address](#) **GetCurrentCustomerDefaultShippingAddress** ()
- static [Models.Address](#) **CreateAddress** (bool isBillingDefault, bool isShippingDefault, string userName, string firstName, string lastName, string phone, string address1, string address2, string city, string county, State, string country, string zipCode, DateTime createdOn, string createdBy, DateTime modifiedOn, string modifiedBy)
- static [Models.Address](#) **CreateAddress** ([Models.Address](#) address)
- static void **DeleteAddress** ([Models.Address](#) address)
- static void **DeleteAddress** (int addressId)
- static void **UpdateAddress** ([Models.Address](#) address)


The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Address/AddressService.cs

5.5 FlexwebCommerce.Controllers.api.AddressWebServiceController Class Reference

[AddressWebServiceController](#) provides control for address using webapi

Inheritance diagram for FlexwebCommerce.Controllers.api.AddressWebServiceController:

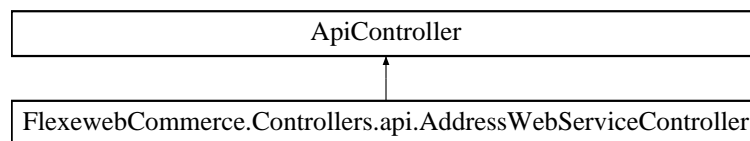

Public Member Functions

- int [CreateAddress](#) (JsonObject json)
Creates an address from the JSON passed in
- [Address](#) [UpdateAddress](#) (JsonObject json)
Updates an address from the JSON passed in
- [Address](#) [GetAddress](#) (JsonObject json)
Retrieves an address from the JSON passed in
- void [DeleteAddress](#) (JsonObject json)
Deletes an address based on the JSON passed in
- IEnumerable< [Address](#) > [GetCurrentCustomerAddresses](#) ()
Retrieves the current customers addresses
- [Address](#) [GetCurrentCustomerDefaultBillingAddress](#) ()
Retrieves the current customers default billing address
- [Address](#) [GetCurrentCustomerDefaultShippingAddress](#) ()
Retrieves the current customers default shipping address

5.5.1 Detailed Description

[AddressWebServiceController](#) provides control for address using webapi

5.5.2 Member Function Documentation

5.5.2.1 int FlexwebCommerce.Controllers.api.AddressWebServiceController.CreateAddress (JObject *json*)

Creates an address from the JSON passed in

Parameters

<i>json</i>	JSON Object of format:
-------------	------------------------

```
{ "IsBillingDefault" : "true" "IsShippingDefault" : "true" "FirstName" : "Steven" "LastName" : "Misnomer" "Phone" : "01656123456" "Address1" : "11 Fake Street" "Address2" : "Random Area" "City" : "Newtown" "CountyState" : "Pretendshire" "Country" : "GB" "ZipCode" : "PS11 1AB" }
```

Returns

Id of created address

5.5.2.2 void FlexwebCommerce.Controllers.api.AddressWebServiceController.DeleteAddress (JObject json)

Deletes an address based on the JSON passed in

Parameters

<i>json</i>	JSON Object of format:
-------------	------------------------

```
{ "addressId" : "123" }
```

Returns

void

5.5.2.3 Address FlexwebCommerce.Controllers.api.AddressWebServiceController.GetAddress (JObject json)

Retrieves an address from the JSON passed in

Parameters

<i>json</i>	JSON Object of format:
-------------	------------------------

```
{ "addressId" : "123" }
```

Returns

Address as [Models.Address](#) object

5.5.2.4 IEnumerable<Address> FlexwebCommerce.Controllers.api.AddressWebServiceController.GetCurrentCustomerAddresses ()

Retrieves the current customers addresses

Returns

Address list as `IEnumerable<Models.Address>` object

5.5.2.5 Address FlexwebCommerce.Controllers.api.AddressWebServiceController.GetCurrentCustomerDefaultBillingAddress ()

Retrieves the current customers default billing address

Returns

Address as [Models.Address](#) object

5.5.2.6 Address FlexwebCommerce.Controllers.api.AddressWebServiceController.GetCurrentCustomerDefaultShipping↔ Address ()

Retrieves the current customers default shipping address

Returns

Address as [Models.Address](#) object

5.5.2.7 Address FlexwebCommerce.Controllers.api.AddressWebServiceController.UpdateAddress (JObject json)

Updates an address from the JSON passed in

Parameters

<i>json</i>	JSON Object of format:
-------------	------------------------

```
{ "IsBillingDefault" : "true" "IsShippingDefault" : "true" "FirstName" : "Steven" "LastName" : "Misnomer" "Phone" : "01656123456" "Address1" : "11 Fake Street" "Address2" : "Random Area" "City" : "Newtown" "CountyState" : "Pretendshire" "Country" : "GB" "ZipCode" : "PS11 1AB" "addressid" : "1" }
```

Returns


The new updated Address as [Models.Address](#)

The documentation for this class was generated from the following file:

- FlexwebCommerce/Controllers/api/AddressWebServiceController.cs

5.6 FlexwebCommerce.Config.AdminUISection Class Reference

Inheritance diagram for FlexwebCommerce.Config.AdminUISection:

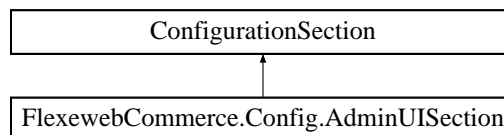

Properties


- [AdminUISectionCollection Sections](#) [get]

The documentation for this class was generated from the following file:

- FlexwebCommerce/ConfigSections/AdminUISection.cs

5.7 FlexwebCommerce.Config.AdminUISectionCollection Class Reference

Inheritance diagram for FlexwebCommerce.Config.AdminUISectionCollection:

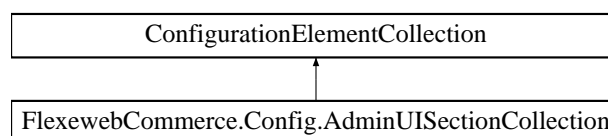

Public Member Functions

- SectionElement **Item** (int index)
- void **set_Item** (int index, SectionElement value)
- void **Add** (SectionElement sec)
- void **Clear** ()
- void **Remove** (SectionElement sec)
- void **RemoveAt** (int index)
- void **Remove** (string name)

Protected Member Functions

- override ConfigurationElement **CreateNewElement** ()
- override object **GetElementKey** (ConfigurationElement element)

Properties


- override ConfigurationElementCollectionType **CollectionType** [get]
- override string **ElementName** [get]

The documentation for this class was generated from the following file:

- FlexwebCommerce/ConfigSections/AdminUISectionCollection.cs

5.8 FlexwebCommerce.Config.AdminUISectionTabCollection Class Reference

Inheritance diagram for FlexwebCommerce.Config.AdminUISectionTabCollection:

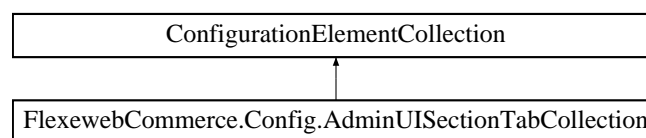

Public Member Functions

- [TabElement](#) **Item** (int index)
- void **set_Item** (int index, [TabElement](#) value)
- void **Add** ([TabElement](#) tab)
- void **Clear** ()
- void **Remove** ([TabElement](#) tab)
- void **RemoveAt** (int index)
- void **Remove** (string name)

Protected Member Functions

- override ConfigurationElement **CreateNewElement** ()
- override object **GetElementKey** (ConfigurationElement element)

Properties


- override ConfigurationElementCollectionType **CollectionType** [get]
- override string **ElementName** [get]

The documentation for this class was generated from the following file:

- FlexwebCommerce/ConfigSections/AdminUISectionTabCollection.cs

5.9 FlexwebCommerce.Config.AdminUISettingsValidation Class Reference

Inheritance diagram for FlexwebCommerce.Config.AdminUISettingsValidation:

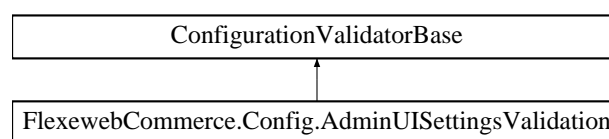

Public Member Functions

- override bool **CanValidate** (Type type)
- override void **Validate** (object value)

5.9.1 Detailed Description

5.9.2 Member Function Documentation


5.9.2.1 override void FlexwebCommerce.Config.AdminUISettingsValidation.Validate (object value)

The documentation for this class was generated from the following file:

- FlexwebCommerce/ConfigSections/AdminUISettingsValidation.cs

5.10 FlexwebCommerce.BusinessLogic.Promotions.Rewards.AmountOffOrder Class Reference

Inheritance diagram for FlexwebCommerce.BusinessLogic.Promotions.Rewards.AmountOffOrder:

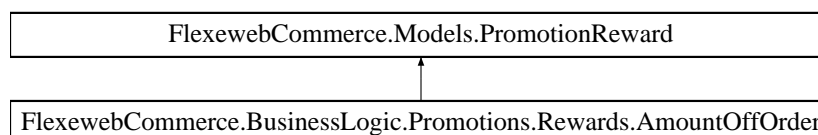

Public Member Functions

- override **Order Apply** (Order order)

Properties

- decimal **DiscountAmount** [get, set]
- override string **RewardName** [get]


Additional Inherited Members

The documentation for this class was generated from the following file:

- FlexwebCommerce/BusinessLogic/Promotions/Rewards/AmountOffOrder.cs

5.11 FlexwebCommerce.BusinessLogic.Promotions.Rewards.AmountOffOrderLine Class Reference

Inheritance diagram for FlexwebCommerce.BusinessLogic.Promotions.Rewards.AmountOffOrderLine:

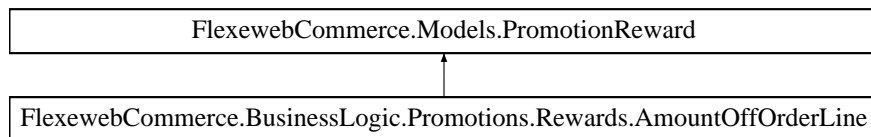

Public Member Functions

- override [Order Apply](#) ([Order](#) order)

Properties

- override string **RewardName** [get]


Additional Inherited Members

The documentation for this class was generated from the following file:

- FlexwebCommerce/BusinessLogic/Promotions/Rewards/AmountOffOrderLine.cs

5.12 FlexwebCommerce.Basket Class Reference

Inheritance diagram for FlexwebCommerce.Basket:



Public Member Functions

- void [InitializeComponent](#) ()
InitializeComponent

- string **GetLanguage** ()
- object **InvokeExpression** (int expressionId, System.Collections.Generic.IList< System.Activities.LocationReference > locations, System.Activities.ActivityContext activityContext)
- object **InvokeExpression** (int expressionId, System.Collections.Generic.IList< System.Activities.Location > locations)
- bool **CanExecuteExpression** (string expressionText, bool isReference, System.Collections.Generic.IList< System.Activities.LocationReference > locations, out int expressionId)
- System.Collections.Generic.IList< string > **GetRequiredLocations** (int expressionId)
- System.Linq.Expressions.Expression **GetExpressionTreeForExpression** (int expressionId, System.Collections.Generic.IList< System.Activities.LocationReference > locationReferences)
- void **InitializeComponent** ()
InitializeComponent

Properties

- System.Activities.InOutArgument< [FlexewebCommerce.Models.Order](#) > **order** [get, set]

5.12.1 Member Function Documentation

5.12.1.1 void FlexewebCommerce.Basket.InitializeComponent ()

InitializeComponent

5.12.1.2 void FlexewebCommerce.Basket.InitializeComponent ()


InitializeComponent

The documentation for this class was generated from the following files:

- FlexewebCommerce.WorkFlows/obj/Debug/Basket.g.cs
- FlexewebCommerce.WorkFlows/obj/Debug/FlexewebCommerce_Basket_CompiledExpressionRoot.cs
- FlexewebCommerce.WorkFlows/obj/Debug/FlexewebCommerce_Basket_BeforeInitializeComponentHelper.cs

5.13 FlexewebCommerce.BusinessLogic.Promotions.Goals.BuyBundle Class Reference

Inheritance diagram for FlexewebCommerce.BusinessLogic.Promotions.Goals.BuyBundle:

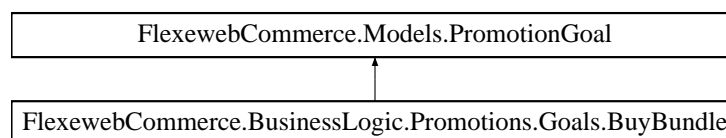

Public Member Functions

- override bool **IsAchieved** ([Order](#) order)

Properties

- string **Bundle** [get, set]
- override string **GoalName** [get]


Additional Inherited Members

The documentation for this class was generated from the following file:

- FlexwebCommerce/BusinessLogic/Promotions/Goals/BuyBundle.cs

5.14 FlexwebCommerce.BusinessLogic.Promotions.Goals.BuyXfromCategory Class Reference

Inheritance diagram for FlexwebCommerce.BusinessLogic.Promotions.Goals.BuyXfromCategory:

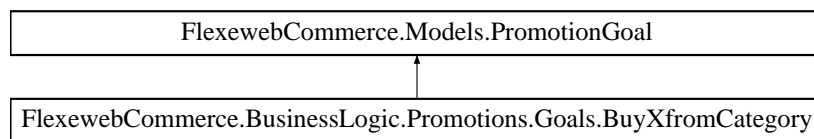

Public Member Functions

- override bool **IsAchieved** ([Order](#) order)

Properties

- int **CategoryId** [get, set]
- int **Quantity** [get, set]
- override string **GoalName** [get]


Additional Inherited Members

The documentation for this class was generated from the following file:

- FlexwebCommerce/BusinessLogic/Promotions/Goals/BuyXfromCategory.cs

5.15 FlexwebCommerce.BusinessLogic.Promotions.Goals.BuyXofProduct Class Reference

Inheritance diagram for FlexwebCommerce.BusinessLogic.Promotions.Goals.BuyXofProduct:

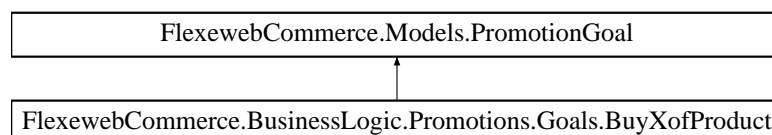

Public Member Functions

- override bool **IsAchieved** ([Order](#) order)

Properties

- int **ProductId** [get, set]
- int **Quantity** [get, set]
- override string **GoalName** [get]

Additional Inherited Members

The documentation for this class was generated from the following file:

- FlexwebCommerce/BusinessLogic/Promotions/Goals/BuyXofProduct.cs

5.16 FlexwebCommerce.Models.Catalogue Class Reference

Public Attributes

- DataTypeAttributes **Attributes** = new DataTypeAttributes()

Properties

- int **CatalogueID** [get, set]
- string **Name** [get, set]
- bool **Active** [get, set]
- string **Description** [get, set]
- DateTime **CreatedOn** [get, set]
- string **CreatedBy** [get, set]
- DateTime **ModifiedOn** [get, set]
- string **ModifiedBy** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Models/Catalogue.cs

5.17 FlexwebCommerce.BusinessLogic.Catalogue Class Reference

Static Public Member Functions


- static string **GetCurrentCustomer** ()
- static bool **IsGuid** (string s)

The documentation for this class was generated from the following file:

- FlexwebCommerce/BusinessLogic/Catalogue.cs

5.18 FlexwebCommerce.Services.Catalogue.CatalogueController Class Reference

Inheritance diagram for FlexwebCommerce.Services.Catalogue.CatalogueController:

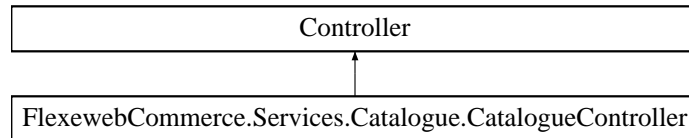

Public Member Functions


- ActionResult **Index** (bool active)
- ActionResult **Details** (int?id)
- ActionResult **Create** ([Bind(Include="Name,Active,Description,CreatedOn,CreatedBy,ModifiedOn,ModifiedBy")] Models.Catalogue catalogue)
- ActionResult **Edit** (int?id)
- ActionResult **Edit** ([Bind(Include="CatalogueID,Name,Active,Description,CreatedOn,CreatedBy,ModifiedOn,ModifiedBy")] Models.Catalogue catalogue)
- ActionResult **Delete** (int?id)
- ActionResult **DeleteConfirmed** (int id)

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Catalogue/CatalogueService.cs

5.19 FlexwebCommerce.Umbraco.Controllers.api.CatalogueController Class Reference

Inheritance diagram for FlexwebCommerce.Umbraco.Controllers.api.CatalogueController:

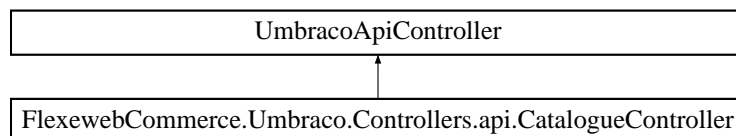

Public Member Functions


- IEnumerable< [Product](#) > **GetAllProducts** ()
- [Product](#) **GetProductById** (int productId)
- IEnumerable< [IRelation](#) > **GetAllUmbracoRelations** ()
- string **GetCategoryNameById** (int contentId)
- IEnumerable< [Category](#) > **GetAllCategories** ()

The documentation for this class was generated from the following file:

- FlexwebCommerce.Umbraco/Controllers/api/CatalogueController.cs

5.20 FlexwebCommerce.Services.Catalogue.CatalogueProvider Class Reference

Inheritance diagram for FlexwebCommerce.Services.Catalogue.CatalogueProvider:

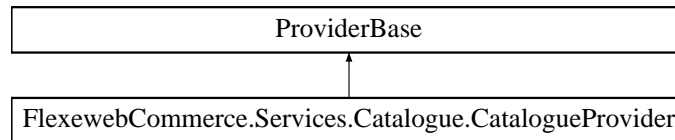

Public Member Functions

- abstract [Models.Catalogue](#) **GetCatalogue** (object catalogueId)
- abstract IEnumerable< [Models.Catalogue](#) > **GetAllCatalogues** ()
- abstract object **AddCatalogue** ([Models.Catalogue](#) catalogue)
- abstract int **AddCatalogue** (string name, bool active, string description, DateTime createdOn, string createdBy, string modifiedOn, DateTime modifiedBy)
- abstract void **UpdateCatalogue** (object catalogueId, string name, bool active, string description, string modifiedOn, DateTime modifiedBy)
- abstract void **UpdateCatalogue** ([Models.Catalogue](#) catalogue)
- abstract void **DeleteCatalogue** (object catalogueId)
- abstract [Models.Category](#) **GetCategory** (object categoryId)
- abstract IEnumerable< [Models.Product](#) > **GetCategoryProducts** (object categoryId)
- abstract IEnumerable< [Models.Category](#) > **GetAllCategories** ()
- abstract object **AddCategory** ([Models.Category](#) category)
- abstract int **AddCategory** (string name, string description, DateTime createdOn, string createdBy, string modifiedOn, DateTime modifiedBy)
- abstract void **UpdateCategory** (object categoryId, string name, string description, string modifiedOn, DateTime modifiedBy)
- abstract void **DeleteCategory** (object categoryId)
- abstract [Models.Product](#) **GetProduct** (object productId)
- abstract [Models.Product](#) **GetProduct** (object productId, DataTypeAttributes attributes)
- abstract [Models.Product](#) **GetProductBySku** (string sku)
- abstract [Models.Product](#) **GetProductBySku** (string parentSku, DataTypeAttributes attributes)
- abstract List< [Models.Product](#) > **GetProductsByParentSku** (string parentSku)
- abstract IEnumerable< [Models.Category](#) > **GetProductCategories** (object productId)
- abstract IEnumerable< [Models.Category](#) > **GetProductCategoriesBySku** (string sku)
- abstract IEnumerable< [Models.Product](#) > **GetAllProducts** ()
- abstract int **AddProduct** ([Models.Product](#) product)
- abstract int **AddProduct** (string name, string sku, [Models.Currency](#) currency, decimal price, string description, string content, string productAttributes, DateTime createdOn, string createdBy, string modifiedOn, DateTime modifiedBy)
- abstract void **UpdateProduct** (object productId, string name, string sku, [Models.Currency](#) currency, decimal price, string description, string content, string productAttributes, string modifiedOn, DateTime modifiedBy)
- abstract void **DeleteProduct** (object productId)

Properties


- abstract bool **IsActive** [get, set]

The documentation for this class was generated from the following file:

- FlexewebCommerce/Services/Catalogue/CatalogueProvider.cs

5.21 FlexwebCommerce.Services.Catalogue.CatalogueProviderCollection Class Reference

Inheritance diagram for FlexwebCommerce.Services.Catalogue.CatalogueProviderCollection:

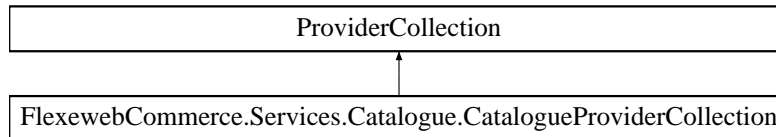

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Catalogue/CatalogueProvider.cs

5.22 FlexwebCommerce.Services.Catalogue.CatalogueXSLTService Class Reference

Static Public Member Functions

- static XPathNavigator **GetCatalogue** (string catalogueId)
- static XPathNavigator **GetAllCatalogues** ()
- static XPathNavigator **AddCatalogue** (string name, string active, string description, DateTime createdOn, string createdBy, string modifiedOn, DateTime modifiedBy)
- static void **UpdateCatalogue** (object catalogueId, string name, string active, string description, string modifiedOn, DateTime modifiedBy)
- static void **DeleteCatalogue** (string catalogueId)
- static XPathNavigator **GetCategory** (string categoryId)
- static XPathNavigator **GetCategoryProducts** (object categoryId)
- static XPathNavigator **GetAllCategories** ()
- static XPathNavigator **AddCategory** (string name, string description, DateTime createdOn, string createdBy, string modifiedOn, DateTime modifiedBy)
- static void **UpdateCategory** (string categoryId, string name, string description, string modifiedOn, DateTime modifiedBy)
- static void **DeleteCategory** (string categoryId)
- static XPathNavigator **GetProduct** (object productId)
- static XPathNavigator **GetProductCategories** (string productId)
- static XPathNavigator **GetAllProducts** ()
- static object **AddProduct** (string name, string sku, [Models.Currency](#) currency, decimal price, string description, string content, string productAttributes, DateTime createdOn, string createdBy, string modifiedOn, DateTime modifiedBy)
- static void **UpdateProduct** (string productId, string name, string sku, [Models.Currency](#) currency, decimal price, string description, string content, string productAttributes, string modifiedOn, DateTime modifiedBy)
- static void **DeleteProduct** (string productId)

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Catalogue/CatalogueService.cs

5.23 FlexwebCommerce.Models.Category Class Reference

Public Attributes

- DataTypeAttributes **Attributes** = new DataTypeAttributes()

Properties

- int **CategoryID** [get, set]
- string **Name** [get, set]
- string **Description** [get, set]
- DateTime **CreatedOn** [get, set]
- string **CreatedBy** [get, set]
- DateTime **ModifiedOn** [get, set]
- string **ModifiedBy** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Models/Category.cs

5.24 FlexwebCommerce.Umbraco.Content.PropertyEditorTypes.CategorySelector Class Reference

Properties


- int **CategoriesId** [get, set]
- bool **Selected** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce.Umbraco/Admin/Content/PropertyEditorTypes/CategorySelector.cs

5.25 FlexwebCommerce.WorkFlows.Checkout Class Reference

Inheritance diagram for FlexwebCommerce.WorkFlows.Checkout:



Public Member Functions

- void [InitializeComponent](#) ()
InitializeComponent
- string **GetLanguage** ()
- object **InvokeExpression** (int expressionId, System.Collections.Generic.IList< System.Activities.LocationReference > locations, System.Activities.ActivityContext activityContext)
- object **InvokeExpression** (int expressionId, System.Collections.Generic.IList< System.Activities.Location > locations)
- bool **CanExecuteExpression** (string expressionText, bool isReference, System.Collections.Generic.IList< System.Activities.LocationReference > locations, out int expressionId)
- System.Collections.Generic.IList< string > **GetRequiredLocations** (int expressionId)
- System.Linq.Expressions.Expression **GetExpressionTreeForExpression** (int expressionId, System.Collections.Generic.IList< System.Activities.LocationReference > locationReferences)
- void [InitializeComponent](#) ()
InitializeComponent

5.25.1 Member Function Documentation

5.25.1.1 void FlexwebCommerce.WorkFlows.Checkout.InitializeComponent ()

InitializeComponent

5.25.1.2 void FlexwebCommerce.WorkFlows.Checkout.InitializeComponent ()


InitializeComponent

The documentation for this class was generated from the following files:

- FlexwebCommerce.WorkFlows/obj/Debug/Checkout.g.cs
- FlexwebCommerce.WorkFlows/obj/Debug/FlexwebCommerce.WorkFlows_Checkout_CompiledExpression↔Root.cs
- FlexwebCommerce.WorkFlows/obj/Debug/FlexwebCommerce.WorkFlows_Checkout_BeforeInitialize↔ComponentHelper.cs

5.26 Manav.Controllers.CheckoutSurfaceController Class Reference

Inheritance diagram for Manav.Controllers.CheckoutSurfaceController:

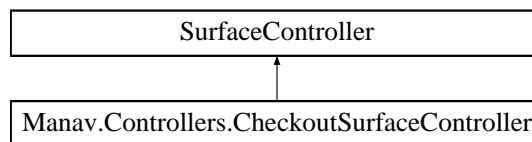

Public Member Functions


- ActionResult **BeginCheckout** ()
- ActionResult **ResumeCheckout** ()
- ActionResult **StartCheckout** ([StartCheckoutViewModel](#) model)
- ActionResult **Delivery** ([DeliveryViewModel](#) model)
- ActionResult **GotoStartStep** ()
- ActionResult **GotoDeliveryStep** ()
- string **StartCheckoutRedirectUrl** ()
- string **NextCheckoutRedirectUrl** (Guid orderguid)

The documentation for this class was generated from the following file:

- Manav/Controllers/CheckoutSurfaceController.cs

5.27 FlexwebCommerce.Controllers.api.CheckoutWebServiceController Class Reference

Inheritance diagram for FlexwebCommerce.Controllers.api.CheckoutWebServiceController:

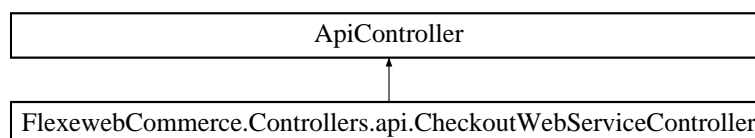

Public Member Functions

- string **StartCheckout** ()
- string **CheckoutStep** (JsonObject json)

The documentation for this class was generated from the following file:

- FlexwebCommerce/Controllers/api/CheckoutWebServiceController.cs

5.28 FlexwebCommerce.Models.Country Class Reference

Public Attributes

- DataTypeAttributes **Attributes** = new DataTypeAttributes()

Properties

- int **CountryID** [get, set]
- string **Code** [get, set]
- string **Name** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Models/Country.cs

5.29 FlexwebCommerce.Models.Coupon Class Reference

Properties


- int **CouponId** [get, set]
- string **Code** [get, set]
- int **MaxUses** [get, set]
- int **PromotionId** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Models/Coupon.cs

5.30 FlexwebCommerce.BusinessLogic.Promotions.Goals.CouponCode Class Reference

Inheritance diagram for FlexwebCommerce.BusinessLogic.Promotions.Goals.CouponCode:

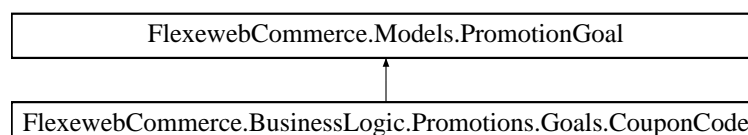

Public Member Functions

- override bool **IsAchieved** ([Order](#) order)

Properties

- string **Code** [get, set]
- int **MaxUses** [get, set]
- override string **GoalName** [get]

Additional Inherited Members

The documentation for this class was generated from the following file:

- FlexwebCommerce/BusinessLogic/Promotions/Goals/CouponCode.cs

5.31 FlexwebCommerce.Models.Currency Class Reference

Public Attributes

- DataTypeAttributes **Attributes** = new DataTypeAttributes()

Properties


- int **CurrencyID** [get, set]
- string **Name** [get, set]
- string **IsoCode** [get, set]
- string **Symbol** [get, set]
- string **HtmlSymbol** [get, set]
- decimal **ExchangeRate** [get, set]
- DateTime **CreatedOn** [get, set]
- string **CreatedBy** [get, set]
- DateTime **ModifiedOn** [get, set]
- string **ModifiedBy** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Models/Currency.cs

5.32 FlexwebCommerce.Services.Currency.CurrencyProvider Class Reference

Inheritance diagram for FlexwebCommerce.Services.Currency.CurrencyProvider:

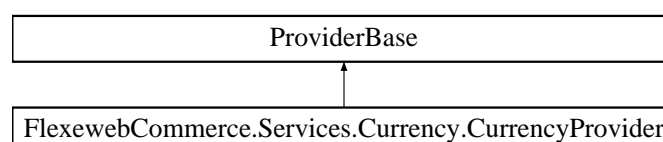

Public Member Functions

- abstract IEnumerable< [Models.Currency](#) > **GetCurrencies** ()
- abstract [Models.Currency](#) **GetCurrency** (int currencyID)
- abstract [Models.Currency](#) **GetCurrencyByIso** (string isoCode)
- abstract [Models.Currency](#) **GetDefaultCurrency** ()
- abstract void **UpdateCurrency** (int currencyID, string name, string isoCode, string symbol, string htmlSymbol, decimal exchangeRate)
- abstract int **AddCurrency** (string name, string isoCode, string symbol, string htmlSymbol, decimal exchangeRate)
- abstract void **DeleteCurrency** (int currencyID)

Properties


- abstract bool **IsActive** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Currency/CurrencyProvider.cs

5.33 FlexwebCommerce.Services.Currency.CurrencyProviderCollection Class Reference

Inheritance diagram for FlexwebCommerce.Services.Currency.CurrencyProviderCollection:

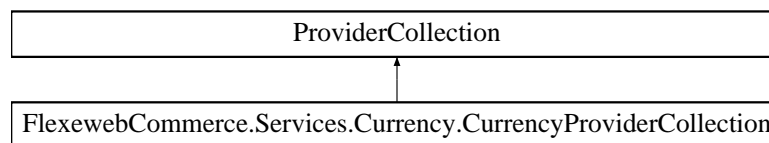

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Currency/CurrencyProvider.cs

5.34 FlexwebCommerce.Services.Currency.CurrencyXSLTService Class Reference

Static Public Member Functions

- static XPathNavigator **GetCurrencies** ()
- static XPathNavigator **GetCurrency** (int currencyID)
- static XPathNavigator **GetCurrencyByIso** (string isoCode)
- static void **UpdateCurrency** (int currencyID, string name, string isoCode, string symbol, string htmlSymbol, decimal exchangeRate)
- static int **AddCurrency** (string name, string isoCode, string symbol, string htmlSymbol, decimal exchangeRate)
- static void **DeleteCurrency** (int currencyID)

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Currency/CurrencyService.cs

5.35 FlexwebCommerce.Models.Customer Class Reference

Public Attributes

- `DataTypeAttributes Attributes = new DataTypeAttributes()`

Properties


- `int CustomerId [get, set]`
- `string UserName [get, set]`
- `string Email [get, set]`
- `string Title [get, set]`
- `string FirstName [get, set]`
- `string LastName [get, set]`
- `string Telephone [get, set]`
- `string Mobile [get, set]`
- `virtual List< Address > Addresses [get, set]`
- `virtual List< Order > Orders [get, set]`

The documentation for this class was generated from the following file:

- `FlexwebCommerce/Models/Customer.cs`

5.36 FlexwebCommerce.Services.Customer.CustomerProvider Class Reference

Inheritance diagram for FlexwebCommerce.Services.Customer.CustomerProvider:

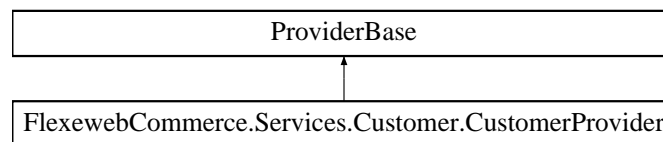

Public Member Functions

- `abstract int AddCustomer (Models.Customer customer)`
- `abstract int AddCustomer (Models.Customer customer, string password)`
- `abstract void UpdateCustomer (Models.Customer customer)`
- `abstract void DeleteCustomer (Models.Customer customer)`
- `abstract void SuspendCustomer (Models.Customer customer)`
- `abstract Models.Customer GetCustomerById (int customerId)`
- `abstract Models.Customer GetCustomerByUserName (string userName)`
- `abstract List< Models.Customer > GetCustomers ()`

Properties


- `abstract bool IsActive [get, set]`

The documentation for this class was generated from the following file:

- `FlexwebCommerce/Services/Customer/CustomerProvider.cs`

5.37 FlexwebCommerce.Services.Customer.CustomerProviderCollection Class Reference

Inheritance diagram for FlexwebCommerce.Services.Customer.CustomerProviderCollection:

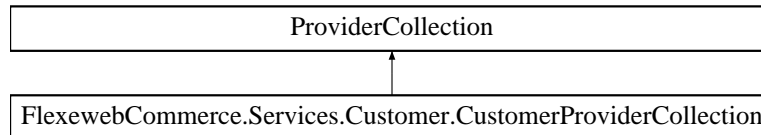


The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Customer/CustomerProvider.cs

5.38 FlexwebCommerce.Controllers.api.CustomerWebServiceController Class Reference

[CustomerWebServiceController](#) provides control for customer using webapi

Inheritance diagram for FlexwebCommerce.Controllers.api.CustomerWebServiceController:

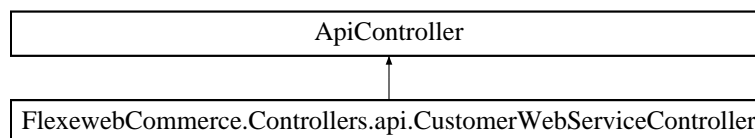

Public Member Functions

- int [AddCustomer](#) (JsonObject json)
Creates a Customer from the JSON passed in
- void [UpdateCustomer](#) (JsonObject json)
Updates a Customer from the JSON passed in
- [Customer Get](#) ()
Retrieves the current customer
- string [GenerateResetToken](#) (JsonObject json)
Generates a reset token on the Customer model for password reset authentication, uses the messaging service to then email the member a link for password reset. Logs using Logging service if customer is not found, or email sending error
- string [UpdatePassword](#) (JsonObject json)
Updates the customer profile with new password, logs any errors
- string [UpdateCurrentCustomersPassword](#) (JsonObject json)
Checks if customer is logged in then updates the customer profile with new password, logs any errors.

5.38.1 Detailed Description

[CustomerWebServiceController](#) provides control for customer using webapi

5.38.2 Member Function Documentation

5.38.2.1 int FlexwebCommerce.Controllers.api.CustomerWebServiceController.AddCustomer (JObject *json*)

Creates a Customer from the JSON passed in

Parameters

<i>json</i>	JSON Object of format:
-------------	------------------------

```
{ "firstname" : "Steven" "lastname" : "Misnomer" "username" : "testusername" "password" : "password" "email" : "smisnomer@email.com" "telephone" : "011111111" }
```

Returns

Id of created customer

5.38.2.2 string FlexwebCommerce.Controllers.api.CustomerWebServiceController.GenerateResetToken (JObject json)

Generates a reset token on the Customer model for password reset authentication, uses the messaging service to then email the member a link for password reset. Logs using Logging service if customer is not found, or email sending error

Parameters

<i>json</i>	JSON Object of format:
-------------	------------------------

```
{ "email" : "smisnomer@email.com" }
```

Returns

string "emailsent" if success. "emailerror" if failed to send email. "Nomemberfound" if customer was not retrieved

5.38.2.3 Customer FlexwebCommerce.Controllers.api.CustomerWebServiceController.Get ()

Retrieves the current customer

Returns

[Models.Customer](#) object

5.38.2.4 string FlexwebCommerce.Controllers.api.CustomerWebServiceController.UpdateCurrentCustomersPassword (JObject json)

Checks if customer is logged in then updates the customer profile with new password, logs any errors.

Parameters

<i>json</i>	JSON Object of format:
-------------	------------------------

```
{ "currentPassword" : "currentpassword" "newPassword" : "newpassword" }
```

Returns

string "passwordupdated" if success, "passwordsdontmatch" if user entered current password incorrectly

5.38.2.5 void FlexwebCommerce.Controllers.api.CustomerWebServiceController.UpdateCustomer (JObject json)

Updates a Customer from the JSON passed in

Parameters

<i>json</i>	JSON Object of format:
-------------	------------------------

```
{ "firstname" : "Steven" "lastname" : "Misnomer" "email" : "smisnomer@email.com" "telephone" : "0111111111"
"email" : "smisnomer@email.com" }
```

Returns

voidr

5.38.2.6 string FlexwebCommerce.Controllers.api.CustomerWebServiceController.UpdatePassword (JObject *json*)

Updates the customer profile with new password, logs any errors

Parameters

<i>json</i>	JSON Object of format:
-------------	------------------------

```
{ "email" : "smisnomer@email.com" "resetGUID" : "25892e17-80f6-415f-9c65-7395632f0223" "newPassword" :
"newpassword" }
```

Returns

string "passwordupdated" if success. "guidsdontmatch" if the reset tokens don't match. "noguidfound" if customer profile does not have a resetGUID

The documentation for this class was generated from the following file:

- FlexwebCommerce/Controllers/api/CustomerWebServiceController.cs

5.39 FlexwebCommerce.DataTypes.DataType Class Reference

Public Attributes

- DataTypeAttributes **Attributes** = new DataTypeAttributes()

Properties


- object **ID** [get, set]
- DateTime **CreatedOn** [get, set]
- string **CreatedBy** [get, set]
- DateTime **ModifiedOn** [get, set]
- string **ModifiedBy** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Models/DataType.cs

5.40 FlexwebCommerce.Services.Inventory.SqlInventoryProvider.dbContext Class Reference

Inheritance diagram for FlexwebCommerce.Services.Inventory.SqlInventoryProvider.dbContext:

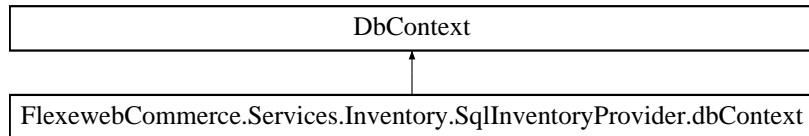

Public Member Functions

- **dbContext** (string conn)

Properties


- DbSet< [Order](#) > **Orders** [get, set]

The documentation for this class was generated from the following file:

- FlexewebCommerce/Services/Inventory/SqlInventoryProvider.cs

5.41 FlexewebCommerce.Services.Orders.SqlOrderProvider.dbContext Class Reference

Inheritance diagram for FlexewebCommerce.Services.Orders.SqlOrderProvider.dbContext:

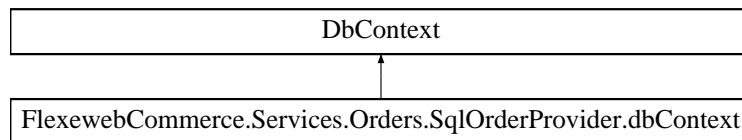

Protected Member Functions

- override void **OnModelCreating** (DbModelBuilder modelBuilder)

Properties


- DbSet< [Models.Order](#) > **Orders** [get, set]
- DbSet< [Models.OrderLine](#) > **OrderLines** [get, set]
- DbSet< [Models.OrderStatus](#) > **OrderStatuses** [get, set]
- DbSet< [Models.OrderNote](#) > **OrderNotes** [get, set]
- DbSet< [Models.Address](#) > **Addresses** [get, set]
- DbSet< [Models.Currency](#) > **Currencies** [get, set]
- DbSet< [Models.Discount](#) > **Discounts** [get, set]
- DbSet< [Models.Transaction](#) > **Transactions** [get, set]

The documentation for this class was generated from the following file:

- FlexewebCommerce/Services/Orders/SqlOrderProvider.cs

5.42 FlexwebCommerce.Services.Address.SqlAddressProvider.dbContext Class Reference

Inheritance diagram for FlexwebCommerce.Services.Address.SqlAddressProvider.dbContext:

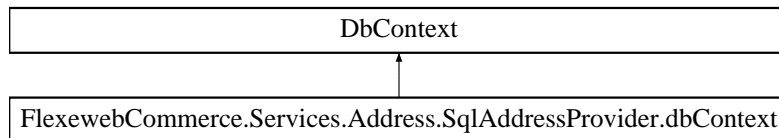

Protected Member Functions

- override void **OnModelCreating** (DbModelBuilder modelBuilder)

Properties


- DbSet< [Models.Address](#) > **Addresses** [get, set]
- DbSet< [Models.Customer](#) > **Customers** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Address/SqlAddressProvider.cs

5.43 FlexwebCommerce.Services.Promotion.StandardPromotionProvider.dbContext Class Reference

Inheritance diagram for FlexwebCommerce.Services.Promotion.StandardPromotionProvider.dbContext:

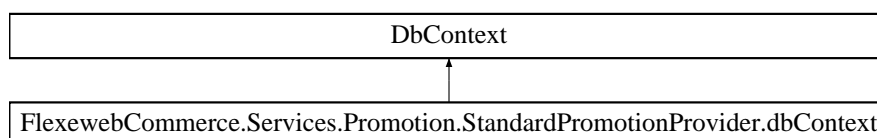

Public Member Functions

- **dbContext** (string conn)

Protected Member Functions

- override void **OnModelCreating** (DbModelBuilder modelBuilder)

Properties

- DbSet< [MarketingCampaign](#) > **MarketingCampaigns** [get, set]
- DbSet< [Models.Promotion](#) > **Promotions** [get, set]
- DbSet< [PromotionGoal](#) > **PromotionGoals** [get, set]
- DbSet< [PromotionReward](#) > **PromotionRewards** [get, set]


- DbSet< [Coupon](#) > **Coupons** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Promotion/StandardPromotionProvider.cs

5.44 FlexwebCommerce.Services.Currency.SqlCurrencyProvider.dbContext Class Reference

Inheritance diagram for FlexwebCommerce.Services.Currency.SqlCurrencyProvider.dbContext:

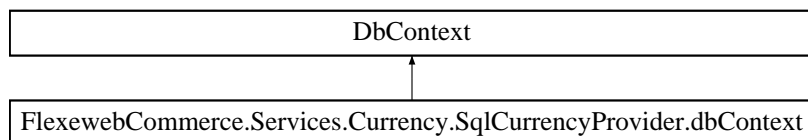

Protected Member Functions

- override void **OnModelCreating** (DbModelBuilder modelBuilder)

Properties


- DbSet< [Models.Currency](#) > **Currencies** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Currency/SqlCurrencyProvider.cs

5.45 FlexwebCommerce.Services.Customer.SqlCustomerProvider.dbContext Class Reference

Inheritance diagram for FlexwebCommerce.Services.Customer.SqlCustomerProvider.dbContext:

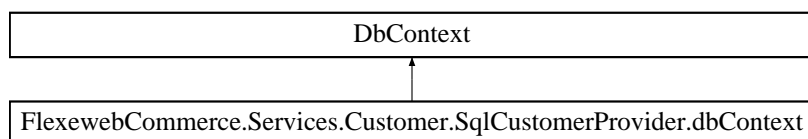

Protected Member Functions

- override void **OnModelCreating** (DbModelBuilder modelBuilder)

Properties


- DbSet< [Models.Customer](#) > **Customers** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Customer/SqlCustomerProvider.cs

5.46 FlexwebCommerce.Services.Fulfillment.BandedFulfillmentProvider.dbContext Class Reference

Inheritance diagram for FlexwebCommerce.Services.Fulfillment.BandedFulfillmentProvider.dbContext:

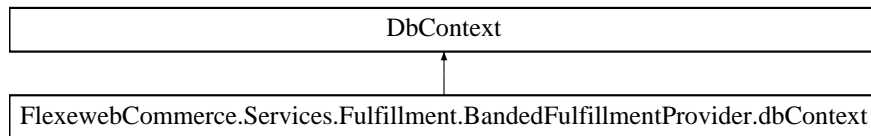

Protected Member Functions

- override void **OnModelCreating** (DbModelBuilder modelBuilder)

Properties

- DbSet< [Models.FulfillmentOption](#) > **FulfillmentOptions** [get, set]
- DbSet< [Models.FulfillmentRestriction](#) > **FulfillmentRestrictions** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Fulfillment/BandedFulfillmentProvider.cs

5.47 Manav.Models.Checkout.DeliveryViewModel Class Reference

Properties

- string **shippingFirstName** [get, set]
- string **shippingLastName** [get, set]
- string **shippingEmail** [get, set]
- string **shippingTelephone** [get, set]
- string **differentAddresses** [get, set]
- int **shippingAddressID** [get, set]
- string **shippingAddress1** [get, set]
- string **shippingAddress2** [get, set]
- string **shippingCity** [get, set]
- string **shippingState** [get, set]
- string **shippingPostCode** [get, set]
- string **shippingCountry** [get, set]
- int **billingAddressID** [get, set]
- string **billingAddress1** [get, set]
- string **billingAddress2** [get, set]
- string **billingCity** [get, set]
- string **billingState** [get, set]
- string **billingPostCode** [get, set]
- string **billingCountry** [get, set]
- bool **AreAddressesDifferent** [get]

The documentation for this class was generated from the following file:

- Manav/Models/Checkout/DeliveryViewModel.cs

5.48 FlexwebCommerce.Models.Discount Class Reference

Public Attributes

- DataTypeAttributes **Attributes** = new DataTypeAttributes()

Properties


- int **DiscountID** [get, set]
- string **DiscountType** [get, set]
- decimal **DiscountAmount** [get, set]
- int **OrderID** [get, set]
- DateTime **CreatedOn** [get, set]
- string **CreatedBy** [get, set]
- DateTime **ModifiedOn** [get, set]
- string **ModifiedBy** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Models/Discount.cs

5.49 FlexwebCommerce.Services.DropShipment.DropShipmentProvider Class Reference

Inheritance diagram for FlexwebCommerce.Services.DropShipment.DropShipmentProvider:

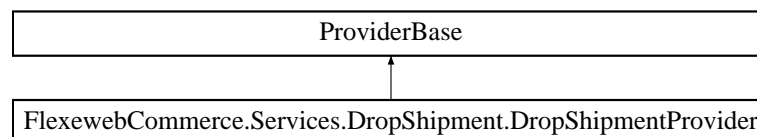

Public Member Functions


- abstract void **SynchCatalogue** (bool overwriteExisting, bool deleteNonExistent)
- abstract void **SubmitOrder** ([Models.Order](#) order)

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/DropShipment/DropShipmentProvider.cs

5.50 FlexwebCommerce.Services.DropShipment.DropShipmentProviderCollection Class Reference

Inheritance diagram for FlexwebCommerce.Services.DropShipment.DropShipmentProviderCollection:

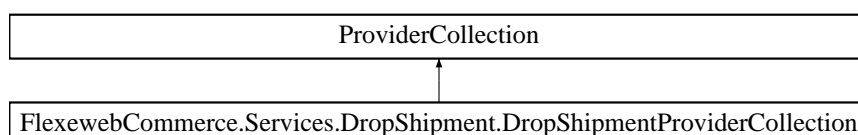

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/DropShipment/DropShipmentProvider.cs

5.51 FlexwebCommerce.Models.EcommerceEnums Class Reference

Public Types


- enum **PaymentGatewaySource** { **Custom** = 0, **PayPal** = 1, **SagePay** = 2 }

The documentation for this class was generated from the following file:

- FlexwebCommerce/Models/EcommerceEnums.cs

5.52 Our.Umbraco.ezSearch.ezSearchBoostrapper Class Reference

Inheritance diagram for Our.Umbraco.ezSearch.ezSearchBoostrapper:

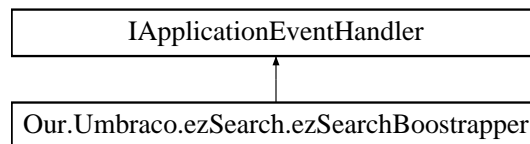

Public Member Functions

- void **OnApplicationInitialized** (UmbracoApplicationBase umbracoApplication, ApplicationContext applicationContext)
- void **OnApplicationStarting** (UmbracoApplicationBase umbracoApplication, ApplicationContext applicationContext)
- void **OnApplicationStarted** (UmbracoApplicationBase umbracoApplication, ApplicationContext applicationContext)

The documentation for this class was generated from the following file:

- Manav/App_Code/ezSearchBoostrapper.cs

5.53 ezTweet Class Reference

Public Member Functions

- **fetch** ()

The documentation for this class was generated from the following file:

- Manav/js/twitter/index.php

5.54 FlexwebCommerce.FilterConfig Class Reference

Static Public Member Functions

- static void **RegisterGlobalFilters** (GlobalFilterCollection filters)

The documentation for this class was generated from the following file:

- FlexwebCommerce/App_Start/FilterConfig.cs

5.55 FlexwebCommerce.Umbraco.FilterConfig Class Reference

Static Public Member Functions


- static void **RegisterGlobalFilters** (GlobalFilterCollection filters)

The documentation for this class was generated from the following file:

- FlexwebCommerce.Umbraco/App_Start/FilterConfig.cs

5.56 FlexwebCommerce.BusinessLogic.Promotions.Rewards.FixedRateDiscount Class Reference

Inheritance diagram for FlexwebCommerce.BusinessLogic.Promotions.Rewards.FixedRateDiscount:

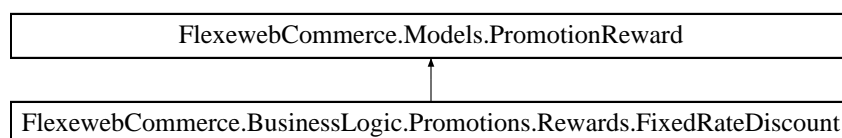

Public Member Functions

- override [Order Apply](#) ([Order](#) order)

Properties

- override string **RewardName** [get]

Additional Inherited Members

The documentation for this class was generated from the following file:

- FlexwebCommerce/BusinessLogic/Promotions/Rewards/FixedRateDiscount.cs

5.57 FlexwebCommerce.Umbraco.Content.flxCataloguesData Class Reference

Properties

- static string `flxCataloguesContentTypeAlias` [get]

The name of the content type alias (document type alias) for the parent FlxCatalogues definition in [Umbraco](#) backoffice
- static string `flxCatalogueContentTypeAlias` [get]

The name of the content type alias (document type alias) for the parent FlxCatalogue definition in [Umbraco](#) backoffice
- static string `flxCataloguesContentName` [get]

The name of the content node in [Umbraco](#) backoffice
- static string `flxProductContentTypeAlias` [get]
- static string `flxIsProduct` [get]
- static string `flxIsCategory` [get]
- static string `flxProductSelector` [get]
- static string `flxCategorySelector` [get]
- static string `flxProductProperty_Name` [get]
- static string `flxProductProperty_Sku` [get]
- static string `flxProductProperty_Currency` [get]
- static string `flxProductProperty_Price` [get]
- static string `flxProductProperty_Description` [get]
- static string `flxProductProperty_Content` [get]
- static string `flxProductProperty_Weight` [get]
- static string `flxProductProperty_Width` [get]
- static string `flxProductProperty_Height` [get]
- static string `flxProductProperty_Length` [get]
- static string `flxProductProperty_ProductAttributes` [get]
- static string `flxProductProperty_SpecialStatus` [get]
- static string `flxProductProperty_Image` [get]
- static string `ProductContentTypeAlias` [get]
- static string `FlxProductVariantContentTypeAlias` [get]
- static string `flxCommerceRelationTypeAlias` [get]
- static string `ProductflxCommerceRelationTypeAlias` [get]

5.57.1 Property Documentation

5.57.1.1 string `FlexwebCommerce.Umbraco.Content.flxCataloguesData.flxCatalogueContentTypeAlias` [static], [get]

The name of the content type alias (document type alias) for the parent FlxCatalogue definition in [Umbraco](#) backoffice

5.57.1.2 string `FlexwebCommerce.Umbraco.Content.flxCataloguesData.flxCataloguesContentName` [static], [get]

The name of the content node in [Umbraco](#) backoffice

5.57.1.3 string `FlexwebCommerce.Umbraco.Content.flxCataloguesData.flxCataloguesContentTypeAlias` [static], [get]


The name of the content type alias (document type alias) for the parent FlxCatalogues definition in [Umbraco](#) backoffice

The documentation for this class was generated from the following file:

- FlexwebCommerce.Umbraco/Admin/Content/flxCataloguesData.cs

5.58 FlexwebCommerce.Umbraco.Admin.UI.FlxCatalogueTree Class Reference

Inheritance diagram for FlexwebCommerce.Umbraco.Admin.UI.FlxCatalogueTree:

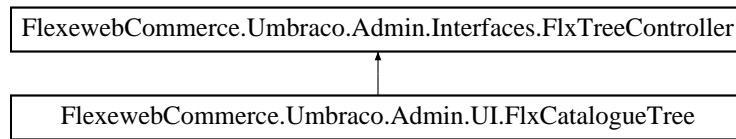

Public Member Functions

- override [FlxTreeNode](#) **GetRootNode** ()
- override List< [FlxTreeNode](#) > **GetChildNodes** ()

Properties


- int **_ParentId** [get, set]
- override int **ParentId** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce.Umbraco/Admin/UI/FlxCatalogueTree.cs

5.59 FlexwebCommerce.Umbraco.Content.flxCommerceApplication Class Reference

Inheritance diagram for FlexwebCommerce.Umbraco.Content.flxCommerceApplication:

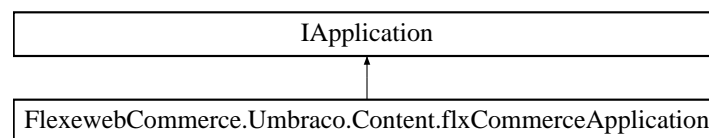

The documentation for this class was generated from the following file:

- FlexwebCommerce.Umbraco/Admin/Content/flxCommerceApplication.cs

5.60 FlexwebCommerce.Umbraco.Content.flxMarketingData Class Reference

Public Types

- enum **FlxMarketingCampaignProperties** { **name**, **startDate**, **endDate**, **isEnabled**, **flxIsMarketing** }
- enum **FlxPromotionProperties** { **name**, **isAllowedAdditional**, **isEnabled**, **flxIsPromotion** }

Properties

- static string `flxMarketingContentTypeAlias` [get]
The name of the content type alias (document type alias) for FlxMarketing in [Umbraco](#) backoffice
- static string `flxMarketingContentName` [get]
- static string `flxIsMarketing` [get]
- static string `flxMarketingCampaignContentAlias` [get]
- static string `flxIsPromotion` [get]
- static string `flxPromotionContentAlias` [get]

5.60.1 Property Documentation

5.60.1.1 string FlexwebCommerce.Umbraco.Content.flxMarketingData.flxMarketingContentTypeAlias [static],[get]

The name of the content type alias (document type alias) for FlxMarketing in [Umbraco](#) backoffice

The documentation for this class was generated from the following file:

- FlexwebCommerce.Umbraco/Admin/Content/flxMarketingData.cs

5.61 FlexwebCommerce.Umbraco.Content.flxOrdersData Class Reference

Properties


- static string `flxOrdersContentTypeAlias` [get]
- static string `flxOrdersContentName` [get]

The documentation for this class was generated from the following file:

- FlexwebCommerce.Umbraco/Admin/Content/flxOrdersData.cs

5.62 FlexwebCommerce.Umbraco.Admin.UI.FlxOrderTree Class Reference

Inheritance diagram for FlexwebCommerce.Umbraco.Admin.UI.FlxOrderTree:

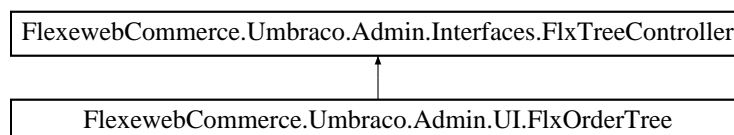

Public Member Functions

- override `FlxTreeNode` `GetRootNode` ()
- override `List< FlxTreeNode >` `GetChildNodes` ()

Properties


- int `_ParentId` [get, set]
- override int `ParentId` [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce.Umbraco/Admin/UI/FlxOrderTree.cs

5.63 FlexwebCommerce.Umbraco.Admin.UI.FlxPromotionTree Class Reference

Inheritance diagram for FlexwebCommerce.Umbraco.Admin.UI.FlxPromotionTree:

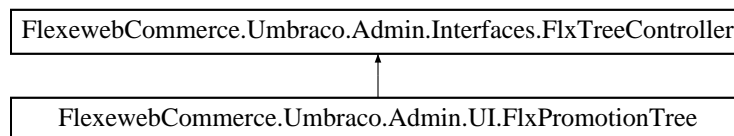

Public Member Functions

- override [FlxTreeNode](#) **GetRootNode** ()
- override List< [FlxTreeNode](#) > **GetChildNodes** ()

Properties

- int **_ParentId** [get, set]
- override int **ParentId** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce.Umbraco/Admin/UI/FlxPromotionTree.cs

5.64 FlexwebCommerce.Umbraco.Content.flxReportsData Class Reference

Properties

- static string **flxReportsContentTypeAlias** [get]
- static string **flxReportsContentName** [get]

The documentation for this class was generated from the following file:

- FlexwebCommerce.Umbraco/Admin/Content/flxReportsData.cs

5.65 FlexwebCommerce.Umbraco.Content.flxSettingsData Class Reference

Properties


- static string **flxSettingsContentTypeAlias** [get]
- static string **flxSettingsContentName** [get]
- static string **emailTemplateAlias** [get]

The documentation for this class was generated from the following file:

- FlexwebCommerce.Umbraco/Admin/Content/flxSettingsData.cs

5.66 FlexwebCommerce.Umbraco.Admin.Interfaces.FlxTreeController Class Reference

Inheritance diagram for FlexwebCommerce.Umbraco.Admin.Interfaces.FlxTreeController:



Public Member Functions

- abstract `FlxTreeNode` **GetRootNode** ()
- abstract `List< FlxTreeNode >` **GetChildNodes** ()

Properties


- abstract `int` **ParentId** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce.Umbraco/Admin/Interfaces/FlxTreeController.cs

5.67 FlexwebCommerce.Umbraco.Controllers.Trees.flxTreeController Class Reference

Inheritance diagram for FlexwebCommerce.Umbraco.Controllers.Trees.flxTreeController:

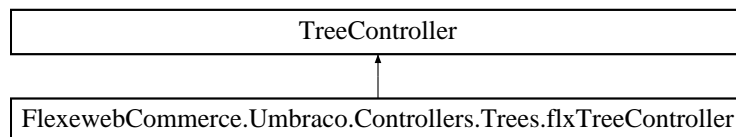

Protected Member Functions

- override `global::Umbraco.Web.Models.Trees.MenuItemCollection` **GetMenuForNode** (string id, FormData↔ Collection queryStrings)
- override `global::Umbraco.Web.Models.Trees.TreeNodeCollection` **GetTreeNodes** (string id, FormData↔ Collection queryStrings)

The documentation for this class was generated from the following file:

- FlexwebCommerce.Umbraco/Controllers/Trees/flxTreeController.cs

5.68 FlexwebCommerce.Umbraco.Admin.Models.FlxTreeNode Class Reference

Properties

- `int` **Id** [get, set]
- `string` **Name** [get, set]
- `string` **Icon** [get, set]
- `string` **RoutePath** [get, set]


- bool **hasChildren** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce.Umbraco/Admin/Models/flxTreeNode.cs

5.69 FlexwebCommerce.BusinessLogic.Promotions.Rewards.FreeProduct Class Reference

Inheritance diagram for FlexwebCommerce.BusinessLogic.Promotions.Rewards.FreeProduct:

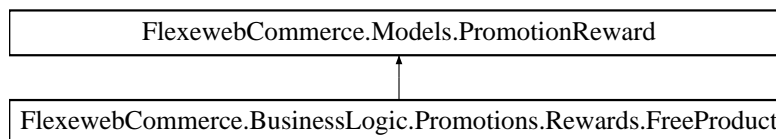

Public Member Functions

- override [Order Apply](#) ([Order](#) order)

Properties

- int **ProductID** [get, set]
- int **Quantity** [get, set]
- override string **RewardName** [get]

Additional Inherited Members

The documentation for this class was generated from the following file:

- FlexwebCommerce/BusinessLogic/Promotions/Rewards/FreeProduct.cs

5.70 FlexwebCommerce.Services.Messaging.FtpClient Class Reference

Static Public Member Functions

- static object **TestFunction** ()
- static bool **PutFile** (string fileName, string destinationServer, string userName, string password)

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Import/FtpProvider.cs

5.71 FlexwebCommerce.Services.Messaging.FtpState Class Reference

Properties

- ManualResetEvent **OperationComplete** [get]

- FtpWebRequest **Request** [get, set]
- string **FileName** [get, set]
- Exception **OperationException** [get, set]
- string **StatusDescription** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Import/FtpProvider.cs

5.72 FlexwebCommerce.Models.FulfillmentOption Class Reference

Public Attributes

- DataTypeAttributes **Attributes** = new DataTypeAttributes()

Properties


- int **FulfillmentOptionID** [get, set]
- decimal **Rate** [get, set]
- decimal **AmountPerUnit** [get, set]
- string **Service** [get, set]
- int **Zone** [get, set]
- decimal **LowerBandLimit** [get, set]
- decimal **UpperBandLimit** [get, set]
- decimal **LowerTotalLimit** [get, set]
- decimal **UpperTotalLimit** [get, set]
- bool **IsAirOnly** [get, set]
- bool **IsGroundOnly** [get, set]
- bool **IsDownloadOnly** [get, set]
- DateTime **CreatedOn** [get, set]
- string **CreatedBy** [get, set]
- DateTime **ModifiedOn** [get, set]
- string **ModifiedBy** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Models/FulfillmentOption.cs

5.73 FlexwebCommerce.Services.Fulfillment.FulfillmentProvider Class Reference

Inheritance diagram for FlexwebCommerce.Services.Fulfillment.FulfillmentProvider:

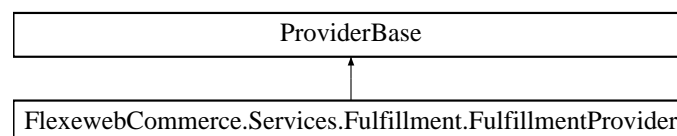

Public Member Functions

- abstract IEnumerable< [FulfillmentOption](#) > **GetShippingOptions** ([PackageInfo](#) package)
- abstract IEnumerable< [FulfillmentOption](#) > **GetShippingOptions** ([PackageInfo](#) package, [FulfillmentRestriction](#) restriction)
- abstract void **AddShippingOption** ([FulfillmentOption](#) option, ProviderArguments providerArgs)
- abstract void **UpdateShippingOption** (int optionId, decimal rate, int postalZoneld, ProviderArguments providerArgs)
- abstract void **DeleteShippingOption** (int optionId)

Properties


- abstract bool **IsActive** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Fulfillment/FulfillmentProvider.cs

5.74 FlexwebCommerce.Services.Fulfillment.FulfillmentProviderCollection Class Reference

Inheritance diagram for FlexwebCommerce.Services.Fulfillment.FulfillmentProviderCollection:

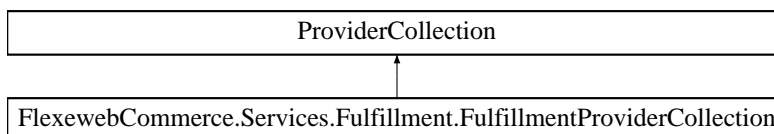

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Fulfillment/FulfillmentProvider.cs

5.75 FlexwebCommerce.Models.FulfillmentRestriction Class Reference

Public Attributes

- DataTypeAttributes **Attributes** = new DataTypeAttributes()

Properties


- int **FulfillmentRestrictionID** [get, set]
- FulfillmentType **TypeRestriction** [get, set]
- DateTime **CreatedOn** [get, set]
- string **CreatedBy** [get, set]
- DateTime **ModifiedOn** [get, set]
- string **ModifiedBy** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Models/FulfillmentRestriction.cs

5.76 FlexwebCommerce.Controllers.api.FulfillmentWebServiceController Class Reference

Inheritance diagram for FlexwebCommerce.Controllers.api.FulfillmentWebServiceController:

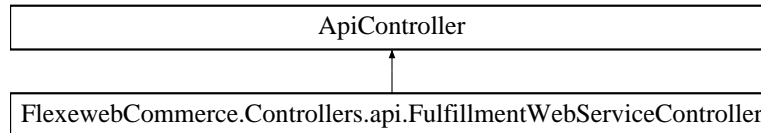

Public Member Functions

- IEnumerable< [Models.FulfillmentOption](#) > **GetShippingOptions** (JObject json)

The documentation for this class was generated from the following file:

- FlexwebCommerce/Controllers/api/FulfillmentWebServiceController.cs

5.77 FlexwebCommerce.BusinessLogic.Messaging.GenerateDictionary Class Reference

Static Public Member Functions


- static Dictionary< string, string > **OrderShipped** (Guid orderGuid)
- static Dictionary< string, string > **OrderNote** (Guid orderGuid, string orderNote)
- static Dictionary< string, string > **OrderConfirmationEmail** (Guid orderGuid)

The documentation for this class was generated from the following file:

- FlexwebCommerce/BusinessLogic/Messaging/GenerateDictionary.cs

5.78 FlexwebCommerce.GoalsElement Class Reference

Inheritance diagram for FlexwebCommerce.GoalsElement:

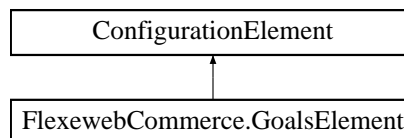

Properties


- string **Name** [get]
- string **Type** [get]
- override ConfigurationPropertyCollection **Properties** [get]

The documentation for this class was generated from the following file:

- FlexwebCommerce/ConfigSections/GoalsElement.cs

5.79 FlexwebCommerce.Config.GoalsElementCollection Class Reference

Inheritance diagram for FlexwebCommerce.Config.GoalsElementCollection:

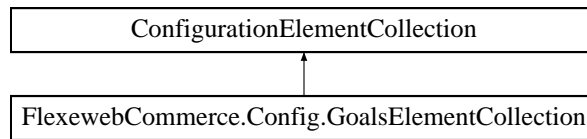

Protected Member Functions

- override ConfigurationElement **CreateNewElement** ()
- override object **GetElementKey** (ConfigurationElement element)

Properties

- override ConfigurationPropertyCollection **Properties** [get]
- override ConfigurationElementCollectionType **CollectionType** [get]
- [GoalsElement this\[string name\]](#) [get]

The documentation for this class was generated from the following file:

- FlexwebCommerce/ConfigSections/GoalsElementCollection.cs

5.80 FlexwebCommerce.Umbraco.Resolvers.hasChildrenResolver Class Reference

Static Public Member Functions

- static bool **hasChildren** (IPublishedContent publishedContent)
- static bool **hasChildren** (IContent content)

The documentation for this class was generated from the following file:

- FlexwebCommerce.Umbraco/Resolvers/hasChildrenResolver.cs

5.81 FlexwebCommerce.Services.Fulfillment.HttpRequestHandler Class Reference

Public Member Functions

- **HttpRequestHandler** (string url)
- string **POST** (string XmlPostData)

Properties


- string **Url** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Fulfillment/HttpRequestHandler.cs

5.82 FlexwebCommerce.Services.Import.ImportProvider Class Reference

Inheritance diagram for FlexwebCommerce.Services.Import.ImportProvider:

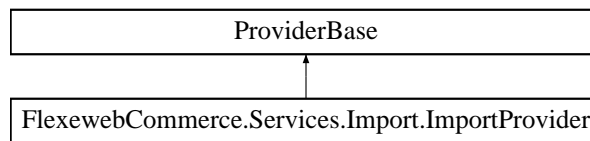

Public Member Functions

- abstract void **Import** (bool overwriteExisting=false)
- abstract void **Import** (int destinationId, bool overwriteExisting=false)
- abstract void **Import** (int destinationId, string sourceFilter, bool overwriteExisting=false)

Properties


- abstract bool **IsActive** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Import/ImportProvider.cs

5.83 FlexwebCommerce.Services.Import.ImportProviderCollection Class Reference

Inheritance diagram for FlexwebCommerce.Services.Import.ImportProviderCollection:

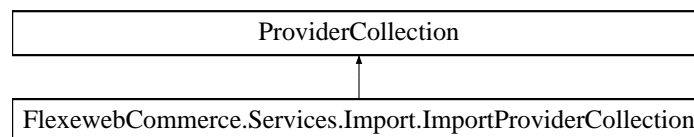

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Import/ImportProvider.cs


5.84 FlexwebCommerce.Services.Import.ImportService Class Reference

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Import/ImportService.cs

5.85 FlexwebCommerce.Controllers.api.ImportWebServiceController Class Reference

Inheritance diagram for FlexwebCommerce.Controllers.api.ImportWebServiceController:

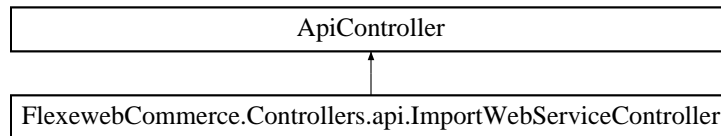

Public Member Functions

- void **Import** (JObject json)
- void **ImportToDestination** (JObject json)

The documentation for this class was generated from the following file:

- FlexewebCommerce/Controllers/api/ImportWebServiceController.cs

5.86 FlexewebCommerce.Models.Inventory Class Reference

Public Attributes

- DataTypeAttributes **Attributes** = new DataTypeAttributes()

Properties


- int **InventoryID** [get, set]
- int **ProductID** [get, set]
- string **ProductAttributes** [get, set]
- DateTime **CreatedOn** [get, set]
- string **CreatedBy** [get, set]
- DateTime **ModifiedOn** [get, set]
- string **ModifiedBy** [get, set]

The documentation for this class was generated from the following file:

- FlexewebCommerce/Models/Inventory.cs

5.87 FlexewebCommerce.Services.Inventory.InventoryProvider Class Reference

Inheritance diagram for FlexewebCommerce.Services.Inventory.InventoryProvider:

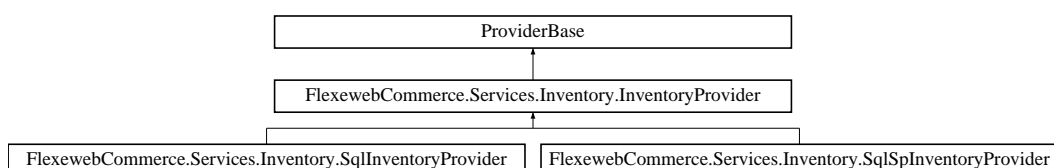

Public Member Functions

- abstract bool **IsInStock** (int productID, DataTypeAttributes productAttributes)
- abstract bool **IsInStockBySku** (string sku, DataTypeAttributes productAttributes)
- abstract string **GetInventoryStatus** (int productID, DataTypeAttributes productAttributes)
- abstract string **GetInventoryStatusBySku** (string sku, DataTypeAttributes productAttributes)
- abstract int **GetInventoryLevel** (int productID, DataTypeAttributes productAttributes)
- abstract int **GetInventoryLevelBySku** (string sku, DataTypeAttributes productAttributes)
- abstract int **ReduceInventoryLevel** (int productID, DataTypeAttributes productAttributes, int amount↔ Purchased)
- abstract int **ReduceInventoryLevelBySku** (string sku, DataTypeAttributes productAttributes, int amount↔ Purchased)
- abstract void **UpdateInventoryLevel** (int productID, DataTypeAttributes productAttributes, int newInventory↔ Level)
- abstract void **UpdateInventoryLevelBySku** (string sku, DataTypeAttributes productAttributes, int new↔ InventoryLevel)
- abstract int **AddInventoryLevel** (int productID, DataTypeAttributes productAttributes, string skuSuffix, int newInventoryLevel)
- abstract int **AddInventoryLevelBySku** (string sku, DataTypeAttributes productAttributes, string skuSuffix, int newInventoryLevel)
- abstract [Models.Inventory](#) **GetInventoryData** (int productID)
- abstract List< [Models.Inventory](#) > **GetInventoryDataBySku** (string sku)
- abstract List< [Models.Inventory](#) > **GetInventoryDataByParentSku** (string parentSku)
- abstract void **DeleteInventoryItem** (int stockID)

Properties


- abstract bool **IsActive** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Inventory/InventoryProvider.cs

5.88 FlexwebCommerce.Services.Inventory.InventoryProviderCollection Class Reference

Inheritance diagram for FlexwebCommerce.Services.Inventory.InventoryProviderCollection:

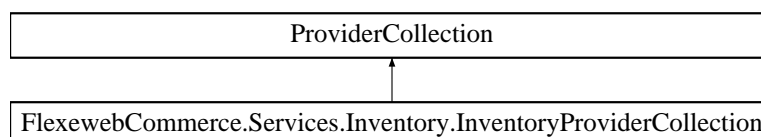


The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Inventory/InventoryProvider.cs

5.89 FlexwebCommerce.Controllers.api.InventoryWebServiceController Class Reference

Inheritance diagram for FlexwebCommerce.Controllers.api.InventoryWebServiceController:

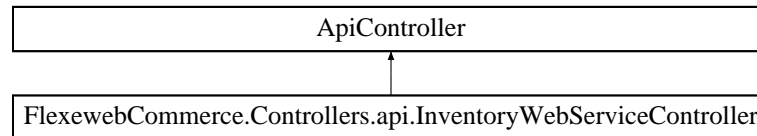

Public Member Functions

- bool **IsInStock** (int productID, string attributes)
- string **GetInventoryStatusBySku** (JObject data)
- List< [Models.Inventory](#) > **GetInventoryDataByParentSku** (string parentSku)

The documentation for this class was generated from the following file:

- FlexwebCommerce/Controllers/api/InventoryWebServiceController.cs

5.90 FlexwebCommerce.Services.Inventory.InventoryXSLTService Class Reference

Static Public Member Functions

- static XPathNavigator **GetInventoryData** (int productID)
- static XPathNavigator **GetInventoryDataBySku** (string sku)
- static void **DeleteInventoryItem** (int InventoryID)

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Inventory/InventoryService.cs

5.91 FlexwebCommerce.Licensing Class Reference

Static Public Member Functions

- static bool **Validate** ()

The documentation for this class was generated from the following file:

- FlexwebCommerce/Licensing.cs

5.92 FlexwebCommerce.Umbraco.Resolvers.MapUmbracoToModelResolver< T > Class Template Reference

Public Member Functions

- **MapUmbracoToModelResolver** (T model, IPublishedContent content)

Properties

- **T GetModel** [get]

The documentation for this class was generated from the following file:

- FlexwebCommerce.Umbraco/Resolvers/MapUmbracoToModelResolver.cs

5.93 FlexwebCommerce.Models.MarketingCampaign Class Reference

Properties

- int **MarketingCampaignId** [get, set]
- string **Name** [get, set]
- DateTime **Starts** [get, set]
- DateTime **Ends** [get, set]
- bool **isEnabled** [get, set]
- virtual List< [Promotion](#) > **Promotions** [get, set]
- DateTime **CreatedOn** [get, set]
- string **CreatedBy** [get, set]
- DateTime **ModifiedOn** [get, set]
- string **ModifiedBy** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Models/MarketingCampaign.cs

5.94 FlexwebCommerce.Messages Class Reference

Static Public Attributes

- static string **FulfillmentConfigSectionNotFound** = "Fulfillment configuration section could not be found"
- static string **FulfillmentProviderInstantiationError** = "Fulfillment default provider could not be instantiated"
- static string **FulfillmentRequiredAttributesMissing** = "Some of the required attributes of FulfillmentProvider are NULL"
- static string **PostcodeConfigSectionNotFound** = "Postcode configuration section could not be found"
- static string **PostcodeProviderInstantiationError** = "Postcode default provider could not be instantiated"
- static string **PostcodeRequiredAttributesMissing** = "Some of the required attributes of PostcodeProvider are NULL"
- static string **AddressConfigSectionNotFound** = "Address configuration section could not be found"
- static string **AddressProviderInstantiationError** = "Address default provider could not be instantiated"
- static string **AddressRequiredAttributesMissing** = "Some of the required attributes of AddressProvider are NULL"
- static string **OrderConfigSectionNotFound** = "Order configuration section could not be found"
- static string **OrderProviderInstantiationError** = "Order default provider could not be instantiated"
- static string **OrderRequiredAttributesMissing** = "Some of the required attributes of [OrderProvider](#) are NULL"
- static string **CatalogueConfigSectionNotFound** = "Catalogue configuration section could not be found"
- static string **CatalogueProviderInstantiationError** = "Catalogue default provider could not be instantiated"
- static string **CatalogueRequiredAttributesMissing** = "Some of the required attributes of CatalogueProvider are NULL"
- static string **DropShipmentConfigSectionNotFound** = "DropShipment configuration section could not be found"

- static string **DropShipmentProviderInstantiationError** = "DropShipment default provider could not be instantiated"
- static string **DropShipmentRequiredAttributesMissing** = "Some of the required attributes of DropShipmentProvider are NULL"
- static string **InventoryConfigSectionNotFound** = "Inventory configuration section could not be found"
- static string **InventoryProviderInstantiationError** = "Inventory default provider could not be instantiated"
- static string **InventoryRequiredAttributesMissing** = "Some of the required attributes of InventoryProvider are NULL"
- static string **CurrencyConfigSectionNotFound** = "Currency configuration section could not be found"
- static string **CurrencyProviderInstantiationError** = "Currency default provider could not be instantiated"
- static string **CurrencyRequiredAttributesMissing** = "Some of the required attributes of CurrencyProvider are NULL"
- static string **CustomerConfigSectionNotFound** = "Customer configuration section could not be found"
- static string **CustomerProviderInstantiationError** = "Customer default provider could not be instantiated"
- static string **CustomerRequiredAttributesMissing** = "Some of the required attributes of CustomerProvider are NULL"
- static string **PromotionConfigSectionNotFound** = "Promotion configuration section could not be found"
- static string **PromotionProviderInstantiationError** = "Promotion default provider could not be instantiated"
- static string **PromotionRequiredAttributesMissing** = "Some of the required attributes of PromotionProvider are NULL"
- static string **TaxConfigSectionNotFound** = "Tax configuration section could not be found"
- static string **TaxProviderInstantiationError** = "Tax default provider could not be instantiated"
- static string **TaxRequiredAttributesMissing** = "Some of the required attributes of TaxProvider are NULL"
- static string **TransactionConfigSectionNotFound** = "Transaction configuration section could not be found"
- static string **TransactionProviderInstantiationError** = "Transaction default provider could not be instantiated"
- static string **TransactionRequiredAttributesMissing** = "Some of the required attributes of TransactionProvider are NULL"
- static string **DiscountRequiredAttributesMissing** = "Some of the required attributes of Tax are NULL"
- static string **LicenseActivationError** = "Your License has not been verified, Services have been disabled. Please verify your domain, ip, or software version."

The documentation for this class was generated from the following file:

- FlexwebCommerce/Messages.cs

5.95 FlexwebCommerce.Models.Order Class Reference

Public Member Functions

- decimal **CalculateSubTotal** ()

Public Attributes

- DataTypeAttributes **Attributes** = new DataTypeAttributes()

Properties

- int **OrderID** [get, set]
- int **OrderStatusID** [get, set]
- virtual **Models.OrderStatus OrderStatus** [get, set]
- Guid **OrderGUID** [get, set]
- string **OrderNumber** [get, set]

- DateTime **OrderDate** [get, set]
- string **UserName** [get, set]
- string **Email** [get, set]
- string **FirstName** [get, set]
- string **LastName** [get, set]
- virtual [Customer](#) **Customer** [get, set]
- int **FulfillmentOptionID** [get, set]
- virtual [FulfillmentOption](#) **FulfillmentOption** [get, set]
- string **CouponCode** [get, set]
- int **CurrencyID** [get, set]
- virtual [Models.Currency](#) **Currency** [get, set]
- virtual ICollection<[Models.OrderLine](#)> **OrderLines** [get, set]
- virtual ICollection<[Models.Discount](#)> **Discounts** [get, set]
- virtual ICollection<[Models.OrderShipment](#)> **Shipments** [get, set]
- int **ShippingAddressID** [get, set]
- int **BillingAddressID** [get, set]
- virtual [Models.Address](#) **ShippingAddress** [get, set]
- virtual [Models.Address](#) **BillingAddress** [get, set]
- virtual ICollection<[Models.Transaction](#)> **Transactions** [get, set]
- virtual ICollection<[Models.OrderNote](#)> **Notes** [get, set]
- Guid **CheckoutStatus** [get, set]
- decimal **ShippingAmount** [get, set]
- decimal **HandlingAmount** [get, set]
- decimal **SubTotal** [get, set]
- decimal **OrderTotal** [get, set]
- decimal **TaxAmount** [get, set]
- decimal **TaxRate** [get, set]
- int **ItemsCount** [get, set]
- decimal **DiscountAmount** [get, set]
- string **SpecialInstructions** [get, set]
- string **ShippingTrackingNumber** [get, set]
- int **NumberOfPackages** [get, set]
- string **UserIP** [get, set]
- DateTime **CreatedOn** [get, set]
- string **CreatedBy** [get, set]
- DateTime **ModifiedOn** [get, set]
- string **ModifiedBy** [get, set]
- decimal **ItemsWeight** [get]
- decimal **TotalWidth** [get]
- decimal **TotalHeight** [get]
- decimal **MaxLength** [get]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Models/Order.cs

5.96 FlexwebCommerce.Models.OrderLine Class Reference

Public Attributes

- `DataTypeAttributes Attributes = new DataTypeAttributes()`

Properties

- decimal **LineTotal** [get]
- decimal **LineWeight** [get]
- int **OrderLineID** [get, set]
- int **OrderID** [get, set]
- string **Sku** [get, set]
- int **ProductID** [get, set]
- int **ProductVariantID** [get, set]
- string **ProductName** [get, set]
- string **ProductDescription** [get, set]
- string **ProductImage** [get, set]
- string **ProductUrl** [get, set]
- decimal **Weight** [get, set]
- decimal **Width** [get, set]
- decimal **Height** [get, set]
- decimal **Length** [get, set]
- string **DownloadUrl** [get, set]
- int **Quantity** [get, set]
- virtual [Models.Order](#) **Order** [get, set]
- virtual ICollection<[Discount](#)> **Discounts** [get, set]
- decimal **PricePaid** [get, set]
- decimal **DiscountAmount** [get]
- decimal **TaxAmount** [get, set]
- decimal **TaxRate** [get, set]
- decimal **Total** [get, set]
- int **CurrencyID** [get, set]
- virtual [Models.Currency](#) **Currency** [get, set]
- int **ShipmentID** [get, set]
- DateTime **CreatedOn** [get, set]
- string **CreatedBy** [get, set]
- DateTime **ModifiedOn** [get, set]
- string **ModifiedBy** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Models/OrderLine.cs

5.97 FlexwebCommerce.Models.OrderNote Class Reference

Public Attributes

- DataTypeAttributes **Attributes** = new DataTypeAttributes()

Properties

- int **OrderNoteID** [get, set]
- string **Note** [get, set]
- int **OrderID** [get, set]
- string **OrderStatus** [get, set]
- DateTime **CreatedOn** [get, set]
- string **CreatedBy** [get, set]
- DateTime **ModifiedOn** [get, set]


- string **ModifiedBy** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Models/OrderNote.cs

5.98 FlexwebCommerce.Services.Orders.OrderProvider Class Reference

Inheritance diagram for FlexwebCommerce.Services.Orders.OrderProvider:

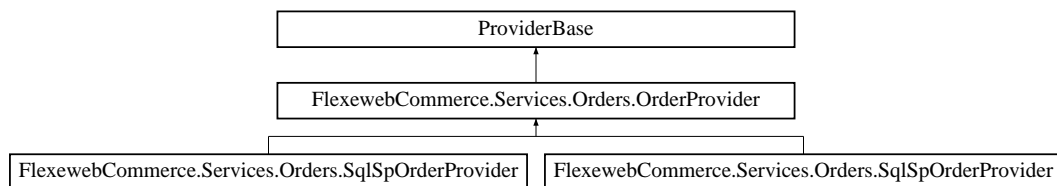

Public Member Functions

- abstract [Models.Order](#) **GetOrder** (int orderId)
- abstract [Models.Order](#) **GetOrder** (Guid orderGuid)
- abstract [Models.Order](#) **AddShippingAddress** ([Models.Address](#) address)
- abstract [Models.Order](#) **AddBillingAddress** ([Models.Address](#) address)
- abstract void **AddShippingAmount** ([FulfillmentOption](#) option)
- abstract IEnumerable< [Models.Order](#) > **GetAllOrders** ()
- abstract IEnumerable< [Models.Order](#) > **GetAllOrders** (string orderStatus)
- abstract IEnumerable< [Models.Order](#) > **GetCurrentCustomerOrders** ()
- abstract IEnumerable< [Models.Order](#) > **GetCurrentCustomerOrders** (Guid userId)
- abstract IEnumerable< [Models.Order](#) > **GetCurrentCustomerOrders** (string userName)
- abstract IEnumerable< [Models.Order](#) > **GetCurrentCustomerOrders** (Guid userId, string orderStatus)
- abstract IEnumerable< [Models.Order](#) > **GetCurrentCustomerOrders** (string userName, string orderStatus)
- abstract [Models.Order](#) **GetCurrentCustomerOrder** ()
- abstract [Models.Order](#) **GetCurrentCustomerOrder** (Guid userId)
- abstract [Models.Order](#) **GetCurrentCustomerOrder** (string userName)
- abstract [Models.Order](#) **MergeOrders** (string oldUserName, string newUserName)
- abstract [Models.Order](#) **CreateOrder** (string orderNumber, DateTime orderDate, string orderStatus, string userName, string email, string firstName, string lastName, string shippingPhone, int? fulfillmentOptionId, decimal shippingAmount, decimal handlingAmount, decimal taxAmount, decimal taxRate, string couponCodes, decimal discountAmount, string specialInstructions, int shippingAddressID, int billingAddressID, string userIP, string shippingTrackingNumber, int numberOfPackages, string packagingNotes, string shipmentID, DateTime createdOn, string createdBy, DateTime modifiedOn, string modifiedBy)
- abstract [Models.Order](#) **CreateOrder** ([Models.Order](#) order)
- abstract void **CancelOrder** ([Models.Order](#) order)
- abstract void **CancelOrder** (int orderId)
- abstract void **CancelOrder** (Guid orderGuid)
- abstract void **DeleteOrder** ([Models.Order](#) order)
- abstract void **DeleteOrder** (int orderId)
- abstract void **DeleteOrder** (Guid orderGuid)
- abstract void **UpdateOrder** ([Models.Order](#) order)
- abstract [Models.Transaction](#) **CommitOrder** ([Models.Order](#) order, string transactionID, decimal transactionAmount, string transactionType)
- abstract [Models.Transaction](#) **CommitOrder** (string orderId, string transactionID, decimal transactionAmount, string transactionType)

- abstract [Models.Transaction](#) **CommitOrder** (Guid orderGuid, string transactionID, decimal transactionAmount, string transactionType)
- abstract [Models.Transaction](#) **TransactOrder** ([Models.Order](#) order, [Models.TransactionType](#) transType)
- abstract void **RefundOrder** ([Models.Order](#) order)
- abstract int **AddOrderLine** ([Models.OrderLine](#) orderLine)
- abstract int **AddOrderLine** (int orderId, string sku, int productId, string productName, string productDescription, string productImage, string productUrl, decimal weight, decimal width, decimal height, decimal length, string downloadUrl, int quantity, decimal pricePaid, decimal discount, decimal taxAmount, decimal taxRate, decimal total, string currency, int shipmentID, [DataTypeAttributes](#) attributes, DateTime createdOn, string createdBy, DateTime modifiedOn, string modifiedBy)
- abstract [Models.Order](#) **AddOrderLine** ([Order](#) order, [Product](#) product, int quantity, decimal taxAmount, decimal taxRate, decimal total)
- abstract void **DeleteOrderLine** ([Models.OrderLine](#) orderLine)
- abstract void **DeleteOrderLine** (int orderLineId)
- abstract void **UpdateOrderLineQuantity** (int orderLineId, int quantity)
- abstract [Models.OrderStatus](#) **GetOrderStatus** (int orderStatusID)
- abstract IEnumerable< [Models.OrderStatus](#) > **GetAllOrderStatus** ()
- abstract [Models.OrderStatus](#) **AddOrderStatus** (int sortOrder, string name, DateTime createdOn, string createdBy, DateTime modifiedOn, string modifiedBy)
- abstract void **DeleteOrderStatus** (int orderStatusId)
- abstract void **UpdateOrderStatus** (int orderStatusID, int sortOrder, string name, DateTime modifiedOn, string modifiedBy)
- abstract IEnumerable< [Models.OrderNote](#) > **GetAllOrderNotes** (int orderId)
- abstract void **DeleteDiscount** ([Discount](#) discount)
- abstract void **AssignCouponCode** (string couponCode)

Properties


- abstract bool **IsActive** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Orders/OrderProvider.cs

5.99 FlexwebCommerce.Services.Orders.OrderProviderCollection Class Reference

Inheritance diagram for FlexwebCommerce.Services.Orders.OrderProviderCollection:

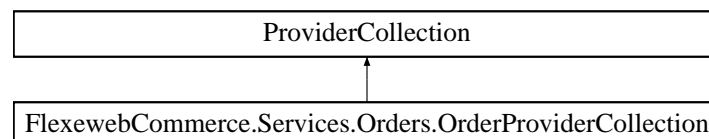

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Orders/OrderProvider.cs

5.100 FlexwebCommerce.Services.Orders.OrderService Class Reference

Static Public Member Functions

- static [Models.Order](#) **GetOrder** (int orderId)
- static [Models.Order](#) **AddShippingAddress** ([Models.Address](#) address)
- static [Models.Order](#) **AddBillingAddress** ([Models.Address](#) address)
- static [Models.Order](#) **GetOrder** (Guid orderGuid)
- static IEnumerable< [Models.Order](#) > **GetAllOrders** ()
- static IEnumerable< [Models.Order](#) > **GetAllOrders** (string orderStatus)
- static IEnumerable< [Models.Order](#) > **GetCustomerOrders** ()
- static IEnumerable< [Models.Order](#) > **GetCustomerOrders** (Guid userId)
- static IEnumerable< [Models.Order](#) > **GetCustomerOrders** (string userName)
- static IEnumerable< [Models.Order](#) > **GetCustomerOrders** (Guid userId, string orderStatus)
- static IEnumerable< [Models.Order](#) > **GetCustomerOrders** (string userName, string orderStatus)
- static [Models.Order](#) **GetCurrentCustomerOrder** ()
- static [Models.Order](#) **GetCurrentCustomerOrder** (Guid userId)
- static [Models.Order](#) **GetCurrentCustomerOrder** (string userName)
- static [Models.Order](#) **MergeOrders** (string oldUserName, string newUserName)
- static [Models.Order](#) **CreateOrder** (string orderNumber, DateTime orderDate, int orderId, string orderStatus, string userName, string email, string firstName, string lastName, string shippingPhone, int fulfillmentOptionId, decimal shippingAmount, decimal handlingAmount, decimal taxAmount, decimal taxRate, string couponCodes, decimal discountAmount, string specialInstructions, int shippingAddressId, int billingAddressId, string userIP, string shippingTrackingNumber, int numberOfPackages, string packagingNotes, string shipmentId, DateTime createdOn, string createdBy, DateTime modifiedOn, string modifiedBy)
- static [Models.Order](#) **CreateOrder** ([Models.Order](#) order)
- static void **CancelOrder** ([Models.Order](#) order)
- static void **CancelOrder** (int orderId)
- static void **CancelOrder** (Guid orderGuid)
- static void **DeleteOrder** ([Models.Order](#) order)
- static void **DeleteOrder** (int orderId)
- static void **DeleteOrder** (Guid orderGuid)
- static void **UpdateOrder** ([Models.Order](#) order)
- static [Models.Transaction](#) **CommitOrder** ([Models.Order](#) order, string transactionId, decimal transactionAmount, string transactionType)
- static [Models.Transaction](#) **CommitOrder** (string orderId, string transactionId, decimal transactionAmount, string transactionType)
- static [Models.Transaction](#) **CommitOrder** (Guid orderGuid, string transactionId, decimal transactionAmount, string transactionType)
- static [Models.Transaction](#) **TransactOrder** ([Models.Order](#) order, [Models.TransactionType](#) transType)
- static void **RefundOrder** ([Models.Order](#) order)
- static int **AddOrderLine** ([Models.OrderLine](#) orderLine)
- static int **AddOrderLine** (int orderId, string sku, int productId, string productName, string productDescription, string productImage, string productUrl, decimal weight, decimal width, decimal height, decimal length, string downloadUrl, int quantity, decimal pricePaid, decimal discount, decimal taxAmount, decimal taxRate, decimal total, string currency, int shipmentId, DataAttributes attributes, DateTime createdOn, string createdBy, DateTime modifiedOn, string modifiedBy)
- static [Models.Order](#) **AddOrderLine** ([Models.Order](#) order, [Product](#) product, int quantity, decimal taxAmount, decimal taxRate, decimal total)
- static void **DeleteOrderLine** ([Models.OrderLine](#) orderLine)
- static void **DeleteOrderLine** (int orderLineId)
- static void **UpdateOrderLineQuantity** (int orderLineId, int quantity)
- static [Models.OrderStatus](#) **GetOrderStatus** (int orderId)
- static IEnumerable< [Models.OrderStatus](#) > **GetAllOrderStatus** ()

- static [Models.OrderStatus](#) **AddOrderStatus** (int sortOrder, string name, DateTime createdOn, string createdBy, DateTime modifiedOn, string modifiedBy)
- static void **DeleteOrderStatus** (int orderStatusID)
- static void **UpdateOrderStatus** (int orderStatusID, int sortOrder, string name, DateTime modifiedOn, string modifiedBy)
- static IEnumerable< [Models.OrderNote](#) > **GetAllOrderNotes** (int orderId)
- static void **AssignCouponCode** (string couponCode)
- static void **AddShippingAmount** ([FulfillmentOption](#) option)

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Orders/OrderService.cs

5.101 FlexwebCommerce.Models.OrderShipment Class Reference

Public Attributes

- DataTypeAttributes **Attributes** = new DataTypeAttributes()

Properties

- int **OrderShipmentID** [get, set]
- string **ShippingTrackingNumber** [get, set]
- int **NumberOfPackages** [get, set]
- string **PackagingNotes** [get, set]
- DateTime **CreatedOn** [get, set]
- string **CreatedBy** [get, set]
- DateTime **ModifiedOn** [get, set]
- string **ModifiedBy** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Models/OrderShipment.cs

5.102 FlexwebCommerce.Models.OrderStatus Class Reference

Public Attributes

- DataTypeAttributes **Attributes** = new DataTypeAttributes()

Properties


- int **OrderStatusID** [get, set]
- int **SortOrder** [get, set]
- string **Name** [get, set]
- DateTime **CreatedOn** [get, set]
- string **CreatedBy** [get, set]
- DateTime **ModifiedOn** [get, set]
- string **ModifiedBy** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Models/OrderStatus.cs

5.103 FlexwebCommerce.Controllers.api.OrderWebServiceController Class Reference

Inheritance diagram for FlexwebCommerce.Controllers.api.OrderWebServiceController:

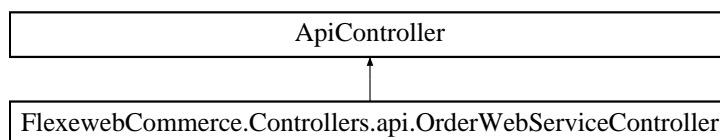

Public Member Functions

- [Order](#) **AddOrderLine** (JObject json)
- void **UpdateOrderLineQuantity** (JObject json)
- void **DeleteOrderLine** (JObject json)
- [Order](#) **GetCurrentCustomerOrder** ()
- IEnumerable< [Order](#) > **GetCurrentCustomerOrders** ()
- void **AssignCouponCode** (JObject json)
- IEnumerable< [Order](#) > **GetAllOrders** ()
- IEnumerable< [Order](#) > **GetAllOrders** (JObject json)
- void **AddNewOrderNote** (JObject json)
- [Order](#) **GetOrderById** (int orderId)
- IEnumerable< [OrderStatus](#) > **GetAllOrderStatus** ()
- void **SetFulfillmentOption** (JObject json)
- bool **DispatchOrders** (JArray json)
- bool **DispatchOrder** (JObject json)
- bool **UnDispatchOrders** (JArray json)
- bool **UpdateOrderStatus** (JObject json)

The documentation for this class was generated from the following file:

- FlexwebCommerce/Controllers/api/OrderWebServiceController.cs

5.104 FlexwebCommerce.Services.Promotion.OrderXSLTService Class Reference

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Promotion/PromotionService.cs

5.105 FlexwebCommerce.Services.Orders.OrderXSLTService Class Reference

Static Public Member Functions

- static XPathNavigator **GetOrder** (int orderId)
- static XPathNavigator **GetOrderByGuid** (string orderGuid)
- static XPathNavigator **GetAllOrders** ()
- static XPathNavigator **GetAllOrders** (string orderStatus)
- static XPathNavigator **GetCustomerOrders** ()
- static XPathNavigator **GetCustomerOrdersByGuid** (string userId)
- static XPathNavigator **GetCustomerOrders** (string userName)
- static XPathNavigator **GetCustomerOrdersByGuid** (string userId, string orderStatus)

- static XPathNavigator **GetCustomerOrders** (string userName, string orderStatus)
- static XPathNavigator **GetCurrentCustomerOrder** ()
- static XPathNavigator **GetCurrentCustomerOrderByGuid** (string userId)
- static XPathNavigator **GetCurrentCustomerOrder** (string userName)
- static XPathNavigator **CreateOrder** (string orderNumber, DateTime orderDate, int orderStatusId, string orderStatus, string userName, string email, string firstName, string lastName, string shippingPhone, int fulfillmentOptionId, decimal shippingAmount, decimal handlingAmount, decimal taxAmount, decimal taxRate, string couponCodes, decimal discountAmount, string specialInstructions, int shippingAddressID, int billingAddressID, string userIP, string shippingTrackingNumber, int numberOfPackages, string packagingNotes, string shipmentID, DateTime createdOn, string createdBy, DateTime modifiedOn, string modifiedBy)
- static void **CancelOrder** (int orderId)
- static void **CancelOrderByGuid** (string orderGuid)
- static void **DeleteOrder** (int orderId)
- static void **DeleteOrder** (string orderGuid)
- static XPathNavigator **CommitOrder** ([Models.Order](#) order, string transactionID, decimal transactionAmount, string transactionType)
- static XPathNavigator **CommitOrder** (string orderId, string transactionID, decimal transactionAmount, string transactionType)
- static XPathNavigator **CommitOrderByGuid** (string orderGuid, string transactionID, decimal transactionAmount, string transactionType)
- static void **DeleteOrderLine** (int orderLineId)
- static void **UpdateOrderLineQuantity** (int orderLineId, int quantity)
- static XPathNavigator **GetOrderStatus** (int orderStatusID)
- static XPathNavigator **GetAllOrderStatus** ()
- static XPathNavigator **AddOrderStatus** (int sortOrder, string name, DateTime createdOn, string createdBy, DateTime modifiedOn, string modifiedBy)
- static void **DeleteOrderStatus** (int orderStatusID)
- static void **UpdateOrderStatus** (int orderStatusID, int sortOrder, string name, DateTime modifiedOn, string modifiedBy)
- static XPathNavigator **GetAllOrderNotes** (int orderId)

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Orders/OrderService.cs

5.106 FlexwebCommerce.Models.PackageInfo Class Reference

Public Attributes

- DataTypeAttributes **Attributes** = new DataTypeAttributes()

Properties

- int **PackageInfoID** [get, set]
- string **FromZip** [get, set]
- string **FromCountryCode** [get, set]
- string **ToZip** [get, set]
- string **ToCountryCode** [get, set]
- decimal **Weight** [get, set]
- decimal **Width** [get, set]
- decimal **Value** [get, set]
- decimal **Height** [get, set]
- decimal **Length** [get, set]

- string **DimensionUnit** [get, set]
- decimal **PackagingBuffer** [get, set]
- DateTime **CreatedOn** [get, set]
- string **CreatedBy** [get, set]
- DateTime **ModifiedOn** [get, set]
- string **ModifiedBy** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Models/PackageInfo.cs

5.107 FlexwebCommerce.Models.PaymentGateway Class Reference

Properties


- Uri **Url** [get, set]
- string **MerchantID** [get, set]
- string **Business** [get, set]
- string **Currency** [get, set]
- string **ReturnUrl** [get, set]
- string **CancelUrl** [get, set]
- EcommerceEnums.PaymentGatewaySource **Source** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Models/PaymentGateway.cs

5.108 FlexwebCommerce.Services.Payment.PaymentGatewayProvider Class Reference

Inheritance diagram for FlexwebCommerce.Services.Payment.PaymentGatewayProvider:

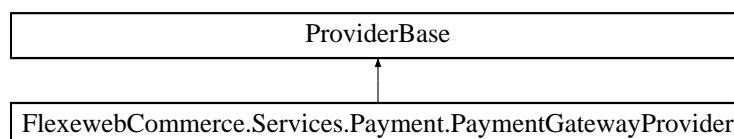

Public Member Functions


- abstract IDictionary< string, object > **GetGatewayDetails** ()
- abstract Dictionary< string, object > **ValidatePayment** (NameValueCollection requestForm)
- abstract Dictionary< string, object > **RegisterPayment** ([Order](#) order)
- abstract bool **ConfirmTransaction** (object TransactionID, out Guid OrderGuid)
- abstract string **EncryptContent** (string content)

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Payment/PaymentGatewayProvider.cs

5.109 FlexwebCommerce.Services.Payment.PaymentGatewayProviderCollection Class Reference

Inheritance diagram for FlexwebCommerce.Services.Payment.PaymentGatewayProviderCollection:

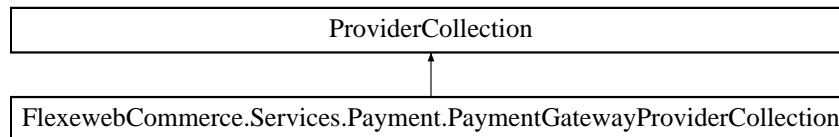

Public Member Functions

- override void **Add** (ProviderBase provider)

Properties


- new [PaymentGatewayProvider](#) **this[string name]** [get]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Payment/PaymentGatewayProvider.cs

5.110 FlexwebCommerce.Controllers.api.PaymentGatewayWebServiceController Class Reference

Inheritance diagram for FlexwebCommerce.Controllers.api.PaymentGatewayWebServiceController:

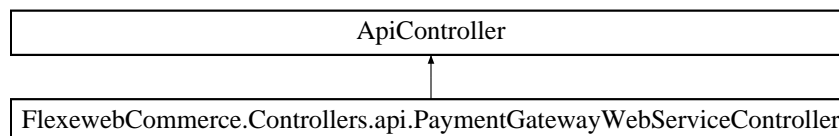

Public Member Functions

- IDictionary< string, object > **GetDetails** (string providerName)
- void [ValidatePayPalPayment](#) ()
IPN handler for confirming and validating PayPal payment notifications.
- string **RegisterTransactionWithSagePay** ()
- string **RegisterTransactionWithSagePayTest** ([FromBody]string guid)
- HttpResponseMessage **HandleSagePayNotification** ()

5.110.1 Member Function Documentation

5.110.1.1 void FlexwebCommerce.Controllers.api.PaymentGatewayWebServiceController.ValidatePayPalPayment ()


IPN handler for confirming and validating PayPal payment notifications.

The documentation for this class was generated from the following file:

- FlexwebCommerce/Controllers/api/PaymentGatewayWebServiceController.cs

5.111 FlexwebCommerce.Services.Payment.PaymentProvider Class Reference

Inheritance diagram for FlexwebCommerce.Services.Payment.PaymentProvider:

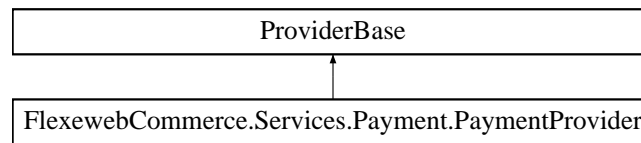

Public Member Functions

- abstract [Models.Transaction Charge](#) ([Order](#) order)
- abstract string **Refund** ([Order](#) order)

Properties


- abstract bool **IsActive** [[get](#), [set](#)]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Payment/PaymentProvider.cs

5.112 FlexwebCommerce.Services.Payment.PaymentProviderCollection Class Reference

Inheritance diagram for FlexwebCommerce.Services.Payment.PaymentProviderCollection:

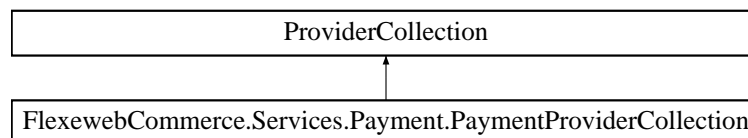

Public Member Functions

- override void **Add** ([ProviderBase](#) provider)

Properties

- new [PaymentProvider](#) **this[string name]** [[get](#)]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Payment/PaymentProvider.cs

5.113 FlexwebCommerce.Services.Payment.PaymentService Class Reference

Public Types

- enum **CreditCardType** { **MasterCard**, **VISA**, **Amex**, **Discover** }

Static Public Member Functions

- static [Models.Transaction RunCharge](#) ([Models.Order](#) order)
- static bool **IsValidCardType** (string cardNumber, CreditCardType CardType)
- static string **Refund** ([Models.Order](#) order)

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Payment/PaymentService.cs


5.114 FlexwebCommerce.Services.Payment.PaymentXSLTService Class Reference

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Payment/PaymentService.cs

5.115 FlexwebCommerce.BusinessLogic.Promotions.Rewards.PercentOffOrder Class Reference

Inheritance diagram for FlexwebCommerce.BusinessLogic.Promotions.Rewards.PercentOffOrder:

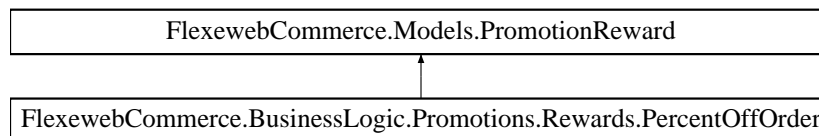

Public Member Functions

- override [Order Apply](#) ([Order](#) order)

Properties

- decimal **DiscountPercent** [get, set]
- override string **RewardName** [get]


Additional Inherited Members

The documentation for this class was generated from the following file:

- FlexwebCommerce/BusinessLogic/Promotions/Rewards/PercentOffOrder.cs

5.116 FlexwebCommerce.BusinessLogic.Promotions.Rewards.PercentOffOrderLine Class Reference

Inheritance diagram for FlexwebCommerce.BusinessLogic.Promotions.Rewards.PercentOffOrderLine:

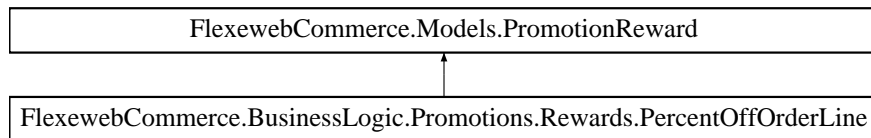

Public Member Functions

- override [Order Apply](#) ([Order](#) order)

Properties

- override string **RewardName** [get]

Additional Inherited Members

The documentation for this class was generated from the following file:

- FlexewebCommerce/BusinessLogic/Promotions/Rewards/PercentOffOrderLine.cs

5.117 FlexewebCommerce.Models.PostalZone Class Reference

Public Attributes

- DataTypeAttributes **Attributes** = new DataTypeAttributes()

Properties


- int **PostalZoneID** [get, set]
- string **Name** [get, set]
- string **Description** [get, set]
- List<[Country](#)> **Countries** [get, set]

The documentation for this class was generated from the following file:

- FlexewebCommerce/Models/PostalZone.cs

5.118 FlexewebCommerce.Services.Postcode.PostcodeProvider Class Reference

Inheritance diagram for FlexewebCommerce.Services.Postcode.PostcodeProvider:

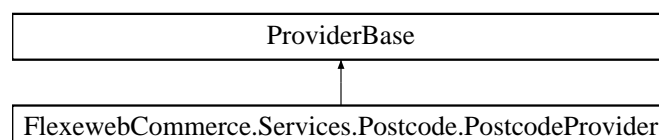

Public Member Functions

- abstract IEnumerable< [Models.Address](#) > **GetAddressListFromPostcode** (string postcode)
- abstract [Models.Address](#) **GetAddressById** (string addressId)

Properties


- abstract bool **IsActive** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Postcode/PostcodeProvider.cs

5.119 FlexwebCommerce.Services.Postcode.PostcodeProviderCollection Class Reference

Inheritance diagram for FlexwebCommerce.Services.Postcode.PostcodeProviderCollection:

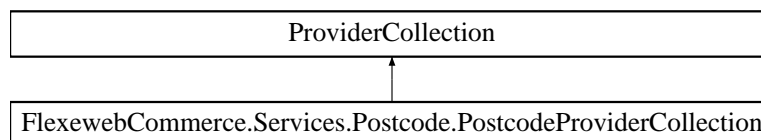

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Postcode/PostcodeProvider.cs

5.120 FlexwebCommerce.Services.Postcode.PostcodeService Class Reference

Static Public Member Functions

- static IEnumerable< [Models.Address](#) > **GetAddressListFromPostcode** (string postcode)
- static [Models.Address](#) **GetAddressById** (string addressId)


The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Postcode/PostcodeService.cs

5.121 FlexwebCommerce.Controllers.api.PostcodeWebServiceController Class Reference

[PostcodeWebServiceController](#) provides control for postcodes using webapi

Inheritance diagram for FlexwebCommerce.Controllers.api.PostcodeWebServiceController:

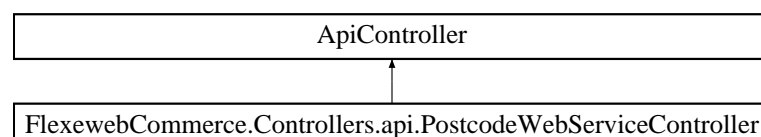

Public Member Functions

- `IEnumerable< Address > GetAddressListFromPostcode (JObject json)`
Gets a list of addresses based on JSON passed in.
- `Address GetAddressById (JObject json)`
Gets a specific address based on the list retrieved by GetAddressListFromPostcode

5.121.1 Detailed Description

[PostcodeWebServiceController](#) provides control for postcodes using webapi

5.121.2 Member Function Documentation

5.121.2.1 Address FlexwebCommerce.Controllers.api.PostcodeWebServiceController.GetAddressById (JObject json)

Gets a specific address based on the list retrieved by GetAddressListFromPostcode

Parameters

<i>json</i>	JSON Object of format:
-------------	------------------------

```
{ "addressId" : "1" }
```

Returns

Model.Address with all fields completed

5.121.2.2 IEnumerable<Address> FlexwebCommerce.Controllers.api.PostcodeWebServiceController.GetAddressListFromPostcode (JObject json)

Gets a list of addresses based on JSON passed in.

Parameters

<i>json</i>	JSON Object of format:
-------------	------------------------

```
{ "postcode" : "CF313WT" }
```

Returns

List of `IEnumerable<Model.Address>`

The documentation for this class was generated from the following file:

- FlexwebCommerce/Controllers/api/PostcodeWebServiceController.cs

5.122 FlexwebCommerce.Models.Product Class Reference

Public Attributes

- `DataTypeAttributes Attributes = new DataTypeAttributes()`

Properties

- int **ProductID** [get, set]
- string **Name** [get, set]
- string **SKU** [get, set]
- **Currency** **Currency** [get, set]
- decimal **Price** [get, set]
- string **Description** [get, set]
- string **Content** [get, set]
- decimal **Weight** [get, set]
- decimal **Width** [get, set]
- decimal **Height** [get, set]
- decimal **Length** [get, set]
- List< string > **ProductAttributes** [get, set]
- string **ImagePath** [get, set]
- string **ProductURL** [get, set]
- DateTime **CreatedOn** [get, set]
- string **CreatedBy** [get, set]
- DateTime **ModifiedOn** [get, set]
- string **ModifiedBy** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Models/Product.cs

5.123 FlexwebCommerce.Umbraco.Content.PropertyEditorTypes.ProductSelector Class Reference

Properties

- int **ProductId** [get, set]
- bool **Selected** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce.Umbraco/Admin/Content/PropertyEditorTypes/ProductSelector.cs

5.124 FlexwebCommerce.Models.Promotion Class Reference

Properties

- int **PromotionId** [get, set]
- string **Name** [get, set]
- bool **isAllowedAdditional** [get, set]
- bool **isEnabled** [get, set]
- int **MarketingCampaignId** [get, set]
- virtual **MarketingCampaign** **MarketingCampaign** [get, set]
- virtual List< **PromotionGoal** > **Goals** [get, set]
- virtual List< **PromotionReward** > **Rewards** [get, set]
- DateTime **CreatedOn** [get, set]
- string **CreatedBy** [get, set]
- DateTime **ModifiedOn** [get, set]


- string **ModifiedBy** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Models/Promotion.cs

5.125 FlexwebCommerce.Models.PromotionGoal Class Reference

Inheritance diagram for FlexwebCommerce.Models.PromotionGoal:



Public Member Functions

- abstract bool **IsAchieved** ([Models.Order](#) order)

Public Attributes

- DataTypeAttributes **Attributes** = new DataTypeAttributes()

Properties


- int **PromotionGoalID** [get, set]
- string **Name** [get, set]
- string **Description** [get, set]
- DateTime **Starts** [get, set]
- DateTime **Ends** [get, set]
- int **PromotionId** [get, set]
- virtual [Promotion](#) **Promotion** [get, set]
- DateTime **CreatedOn** [get, set]
- string **CreatedBy** [get, set]
- DateTime **ModifiedOn** [get, set]
- string **ModifiedBy** [get, set]
- abstract string **GoalName** [get]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Models/PromotionGoal.cs

5.126 FlexwebCommerce.PromotionGoalTypeConverter Class Reference

Inheritance diagram for FlexwebCommerce.PromotionGoalTypeConverter:

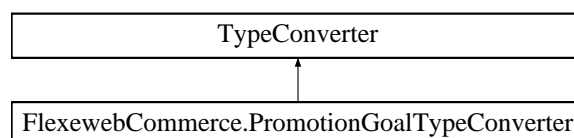

Public Member Functions


- override object **ConvertFrom** (ITypeDescriptorContext context, System.Globalization.CultureInfo culture, object value)
- override bool **CanConvertFrom** (ITypeDescriptorContext context, Type sourceType)

The documentation for this class was generated from the following file:

- FlexwebCommerce/ConfigSections/PromotionGoalTypeConverter.cs

5.127 FlexwebCommerce.Services.Promotion.PromotionProvider Class Reference

Inheritance diagram for FlexwebCommerce.Services.Promotion.PromotionProvider:

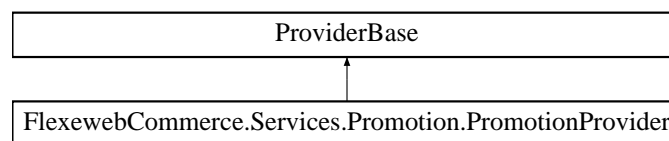

Public Member Functions

- abstract [Models.Order](#) **ApplyRewards** ([Order](#) order)
- abstract [Models.Order](#) **ApplyRewards** ([Order](#) order, [ProviderArguments](#) arguments)
- abstract [IEnumerable](#)< [MarketingCampaign](#) > **GetAllMarketingCampaigns** ()
- abstract [IEnumerable](#)< [MarketingCampaign](#) > **GetCurrentMarketingCampaigns** ()
- abstract int **CreateMarketingCampaign** ([MarketingCampaign](#) marketingCampaign)
- abstract [MarketingCampaign](#) **GetMarketingCampaignByName** (string name)
- abstract [MarketingCampaign](#) **GetMarketingCampaignById** (int marketingCampaignId)
- abstract void **UpdateMarketingCampaign** ([MarketingCampaign](#) marketingCampaign)
- abstract void **DeleteMarketingCampaign** ([MarketingCampaign](#) marketingCampaign)
- abstract int **CreatePromotion** ([Models.Promotion](#) promotion)
- abstract [IEnumerable](#)< [Models.Promotion](#) > **GetAllPromotions** ()
- abstract [IEnumerable](#)< [Models.Promotion](#) > **GetAllPromotionsByMarketingCampaignId** (int marketingCampaignId)
- abstract [Models.Promotion](#) **GetPromotionById** (int promotionId)
- abstract void **UpdatePromotion** ([Models.Promotion](#) promotion)
- abstract void **DeletePromotion** ([Models.Promotion](#) promotion)
- abstract [IEnumerable](#)< [Models.PromotionGoal](#) > **GetAllGoals** ()
- abstract [IEnumerable](#)< [Models.PromotionGoal](#) > **GetAllGoalsByPromotionId** (int promotionId)
- abstract [Models.PromotionGoal](#) **GetGoalById** (int goalId)
- abstract void **UpdatePromotionGoal** ([Models.PromotionGoal](#) goal)
- abstract void **DeletePromotionGoal** ([Models.PromotionGoal](#) goal)
- abstract int **CreateGoal** ([Models.PromotionGoal](#) goal)
- abstract int **CreateReward** ([Models.PromotionReward](#) reward)
- abstract [IEnumerable](#)< [Models.PromotionReward](#) > **GetAllRewards** ()
- abstract [IEnumerable](#)< [Models.PromotionReward](#) > **GetAllRewardsByPromotionId** (int promotionId)
- abstract [Models.PromotionReward](#) **GetRewardById** (int rewardId)
- abstract void **UpdatePromotionReward** ([Models.PromotionReward](#) reward)
- abstract void **DeletePromotionReward** ([Models.PromotionReward](#) reward)
- abstract [IEnumerable](#)< [Coupon](#) > **GetAllCoupons** ()
- abstract [IEnumerable](#)< [Coupon](#) > **GetAllCouponsByPromotionId** (int promotionId)

- string **ModifiedBy** [get, set]
- abstract string **RewardName** [get]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Models/PromotionReward.cs

5.130 FlexwebCommerce.Services.Promotion.PromotionService Class Reference

Static Public Member Functions

- static [Models.Order](#) **ApplyRewards** ([Models.Order](#) order)
- static [Models.Order](#) **ApplyRewards** ([Models.Order](#) order, [ProviderArguments](#) arguments)
- static [IEnumerable](#)< [MarketingCampaign](#) > **GetAllMarketingCampaigns** ()
- static [IEnumerable](#)< [MarketingCampaign](#) > **GetCurrentMarketingCampaigns** ()
- static int **CreateMarketingCampaign** ([MarketingCampaign](#) marketingCampaign)
- static [MarketingCampaign](#) **GetMarketingCampaignByName** (string name)
- static [MarketingCampaign](#) **GetMarketingCampaignById** (int marketingCampaignId)
- static int **CreatePromotion** ([Models.Promotion](#) promotion)
- static [IEnumerable](#)< [Models.Promotion](#) > **GetAllPromotionsByMarketingCampaignId** (int marketingCampaignId)
- static [IEnumerable](#)< [Coupon](#) > **GetAllCoupons** ()
- static [IEnumerable](#)< [Coupon](#) > **GetAllCouponsByPromotionId** (int promotionId)
- static [IEnumerable](#)< [PromotionGoal](#) > **GetAllGoals** ()
- static int **CreateGoal** ([PromotionGoal](#) goal)
- static [PromotionGoal](#) **GetGoalById** (int goalId)
- static [IEnumerable](#)< [PromotionGoal](#) > **GetAllGoalsByPromotionId** (int promotionId)
- static [IEnumerable](#)< [PromotionReward](#) > **GetAllRewards** ()
- static [IEnumerable](#)< [PromotionReward](#) > **GetAllRewardsByPromotionId** (int promotionId)
- static [PromotionReward](#) **GetRewardById** (int rewardId)
- static void **UpdateMarketingCampaign** ([MarketingCampaign](#) marketingCampaign)
- static void **DeleteMarketingCampaign** ([MarketingCampaign](#) marketingCampaign)
- static void **UpdatePromotion** ([Models.Promotion](#) promotion)
- static void **DeletePromotion** ([Models.Promotion](#) promotion)
- static void **UpdatePromotionGoal** ([Models.PromotionGoal](#) promotionGoal)
- static void **DeletePromotionGoal** ([Models.PromotionGoal](#) promotionGoal)
- static void **UpdatePromotionReward** ([Models.PromotionReward](#) promotionReward)
- static void **DeletePromotionReward** ([Models.PromotionReward](#) promotionReward)
- static int **CreateReward** ([Models.PromotionReward](#) promotionReward)

Properties


- static [PromotionProvider](#) **Provider** [get]
- static [PromotionProviderCollection](#) **Providers** [get]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Promotion/PromotionService.cs

5.131 FlexwebCommerce.Config.PromotionsSection Class Reference

Inheritance diagram for FlexwebCommerce.Config.PromotionsSection:

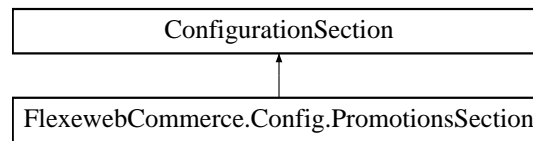

Properties


- [GoalsElementCollection](#) **Goals** [get]
- [RewardsElementCollection](#) **Rewards** [get]

The documentation for this class was generated from the following file:

- FlexwebCommerce/ConfigSections/PromotionsSection.cs

5.132 FlexwebCommerce.Controllers.api.PromotionWebServiceController Class Reference

Inheritance diagram for FlexwebCommerce.Controllers.api.PromotionWebServiceController:

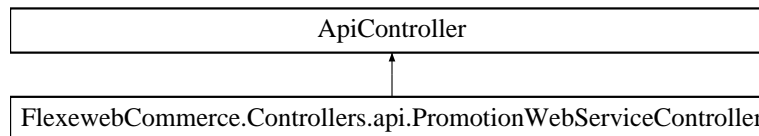

Public Member Functions

- int **CreateMarketingCampaign** ([MarketingCampaign](#) marketingCampaign)
- IEnumerable< [MarketingCampaign](#) > **GetAllMarketingCampaigns** ()
- IEnumerable< [MarketingCampaign](#) > **GetCurrentMarketingCampaigns** ()
- [MarketingCampaign](#) **GetMarketingCampaignById** (int marketingCampaignId)
- void **UpdateMarketingCampaign** ([MarketingCampaign](#) marketingCampaign)
- void **DeleteMarketingCampaign** ([MarketingCampaign](#) marketingCampaign)
- int **CreatePromotion** ([Models.Promotion](#) promotion)
- void **UpdatePromotion** ([Models.Promotion](#) promotion)
- void **DeletePromotion** ([Models.Promotion](#) promotion)
- IEnumerable< [Promotion](#) > **GetAllPromotionsByMarketingCampaignId** (int marketingCampaignId)
- IEnumerable< [PromotionGoal](#) > **GetAllGoals** ()
- IEnumerable< [PromotionGoal](#) > **GetAllGoalsByPromotionId** (int promotionId)
- [PromotionGoal](#) **GetGoalById** (int goalId)
- void **UpdatePromotionGoal** (JsonObject json)
- void **DeletePromotionGoal** (JsonObject json)
- int **CreateGoal** (JsonObject json)
- int **CreateReward** (JsonObject json)
- IEnumerable< [PromotionReward](#) > **GetAllRewardsByPromotionId** (int promotionId)
- [PromotionReward](#) **GetRewardById** (int rewardId)

- void **UpdatePromotionReward** (JObject json)
- void **DeletePromotionReward** (JObject json)

The documentation for this class was generated from the following file:

- FlexwebCommerce/Controllers/api/PromotionWebServiceController.cs

5.133 FlexwebCommerce.Services.ProviderUtils Class Reference

Static Public Member Functions


- static [ServicesSection](#) **GetServiceSection** ()
- static [PromotionsSection](#) **GetPromotionSection** ()
- static ConnectionStringSettingsCollection **GetConnectionStrings** ()
- static string **GetLicenseCode** ()

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/ProviderUtils.cs

5.134 FlexwebCommerce.RewardsElement Class Reference

Inheritance diagram for FlexwebCommerce.RewardsElement:

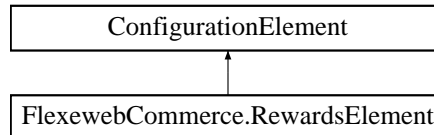

Properties


- string **Name** [get]
- string **Type** [get]
- override ConfigurationPropertyCollection **Properties** [get]

The documentation for this class was generated from the following file:

- FlexwebCommerce/ConfigSections/RewardsElement.cs

5.135 FlexwebCommerce.Config.RewardsElementCollection Class Reference

Inheritance diagram for FlexwebCommerce.Config.RewardsElementCollection:

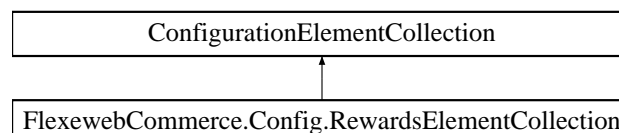

Protected Member Functions

- override ConfigurationElement **CreateNewElement** ()
- override object **GetElementKey** (ConfigurationElement element)

Properties

- override ConfigurationPropertyCollection **Properties** [get]
- override ConfigurationElementCollectionType **CollectionType** [get]
- [RewardsElement](#) **this[string name]** [get]

The documentation for this class was generated from the following file:

- FlexwebCommerce/ConfigSections/RewardsElementCollection.cs

5.136 FlexwebCommerce.Umbraco.Admin.UI.RootNodeKey Class Reference

Public Member Functions

- int **GetKey** (int key)

The documentation for this class was generated from the following file:

- FlexwebCommerce.Umbraco/Admin/UI/RootNodeKey.cs

5.137 FlexwebCommerce.Umbraco.RouteConfig Class Reference

Static Public Member Functions

- static void **RegisterRoutes** (RouteCollection routes)

The documentation for this class was generated from the following file:

- FlexwebCommerce.Umbraco/App_Start/RouteConfig.cs

5.138 FlexwebCommerce.RouteConfig Class Reference

Static Public Member Functions


- static void **RegisterRoutes** (RouteCollection routes)

The documentation for this class was generated from the following file:

- FlexwebCommerce/App_Start/RouteConfig.cs

5.139 FlexwebCommerce.Umbraco.App_EventHandler.Events.SavedEvent Class Reference

Inheritance diagram for FlexwebCommerce.Umbraco.App_EventHandler.Events.SavedEvent:

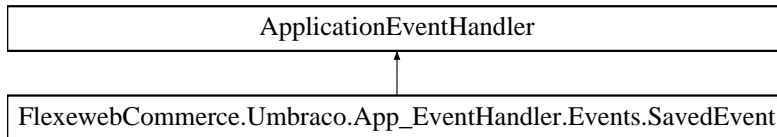


The documentation for this class was generated from the following file:

- FlexwebCommerce.Umbraco/App_EventHandler/Events/SavedEvent.cs

5.140 FlexwebCommerce.Umbraco.App_EventHandler.Events.SavingEvent Class Reference

Inheritance diagram for FlexwebCommerce.Umbraco.App_EventHandler.Events.SavingEvent:

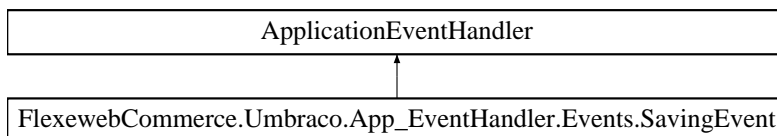


The documentation for this class was generated from the following file:

- FlexwebCommerce.Umbraco/App_EventHandler/Events/SavingEvent.cs

5.141 FlexwebCommerce.Config.SectionsSettingsValidation Class Reference

Inheritance diagram for FlexwebCommerce.Config.SectionsSettingsValidation:

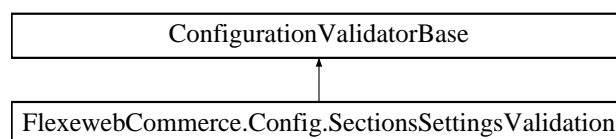

Public Member Functions

- override bool **CanValidate** (Type type)
- override void **Validate** (object value)


5.141.1 Detailed Description

The documentation for this class was generated from the following file:

- FlexwebCommerce/ConfigSections/SectionsSettingsValidation.cs

5.142 FlexwebCommerce.Controllers.api.SecurityWebServiceController Class Reference

Inheritance diagram for FlexwebCommerce.Controllers.api.SecurityWebServiceController:

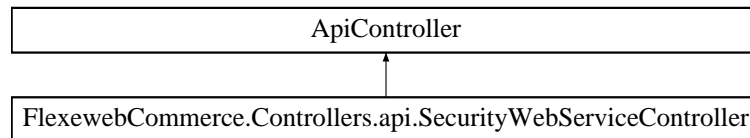

Public Member Functions


- bool **Login** (JsonObject json)
- bool **Logout** ()

The documentation for this class was generated from the following file:

- FlexwebCommerce/Controllers/api/SecurityWebServiceController.cs

5.143 FlexwebCommerce.Config.ServicesSection Class Reference

Inheritance diagram for FlexwebCommerce.Config.ServicesSection:

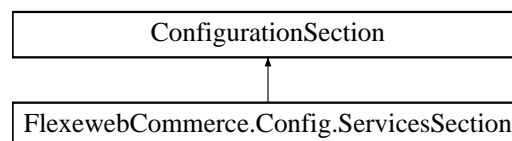

Properties

- string **DefaultCatalogueProvider** [get, set]
- string **DefaultImportProvider** [get, set]
- string **DefaultPostcodeProvider** [get, set]
- string **DefaultFulfillmentProvider** [get, set]
- string **DefaultInventoryProvider** [get, set]
- string **DefaultReviewProvider** [get, set]
- string **DefaultPaymentProvider** [get, set]
- string **DefaultTaxProvider** [get, set]
- string **DefaultDropShipmentProvider** [get, set]
- string **DefaultOrderProvider** [get, set]
- string **DefaultCurrencyProvider** [get, set]
- string **DefaultCustomerProvider** [get, set]
- string **DefaultAddressProvider** [get, set]
- string **DefaultTransactionProvider** [get, set]
- ProviderSettingsCollection **CatalogueProviders** [get]
- ProviderSettingsCollection **PostcodeProviders** [get]
- ProviderSettingsCollection **FulfillmentProviders** [get]
- ProviderSettingsCollection **BusinessLogicProviders** [get]
- ProviderSettingsCollection **InventoryProviders** [get]


- ProviderSettingsCollection **ReviewProviders** [get]
- ProviderSettingsCollection **PaymentProviders** [get]
- ProviderSettingsCollection **PaymentGatewayProviders** [get]
- ProviderSettingsCollection **TaxProviders** [get]
- ProviderSettingsCollection **DropShipmentProviders** [get]
- ProviderSettingsCollection **ImportProviders** [get]
- ProviderSettingsCollection **ExportProviders** [get]
- ProviderSettingsCollection **OrderProviders** [get]
- ProviderSettingsCollection **CurrencyProviders** [get]
- ProviderSettingsCollection **CustomerProviders** [get]
- ProviderSettingsCollection **PromotionProviders** [get]
- ProviderSettingsCollection **AddressProviders** [get]
- ProviderSettingsCollection **TransactionProviders** [get]

The documentation for this class was generated from the following file:

- FlexwebCommerce/ConfigSections/ServicesSection.cs

5.144 FlexwebCommerce.BusinessLogic.Promotions.Goals.SpendMoreThan Class Reference

Inheritance diagram for FlexwebCommerce.BusinessLogic.Promotions.Goals.SpendMoreThan:

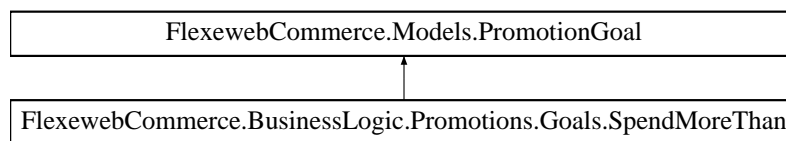

Public Member Functions

- override bool **IsAchieved** ([Order](#) order)

Properties

- decimal **Amount** [get, set]
- override string **GoalName** [get]


Additional Inherited Members

The documentation for this class was generated from the following file:

- FlexwebCommerce/BusinessLogic/Promotions/Goals/SpendMoreThan.cs

5.145 FlexwebCommerce.Services.Inventory.SqlInventoryProvider Class Reference

Inheritance diagram for FlexwebCommerce.Services.Inventory.SqlInventoryProvider:

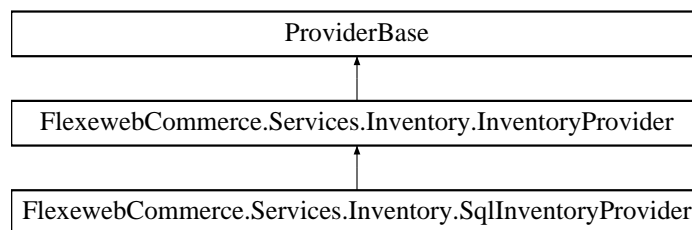

Classes

- class [dbContext](#)

Public Member Functions

- override void **Initialize** (string name, NameValueCollection config)
- override bool **IsInStock** (int productID, DataTypeAttributes productAttributes)
- override bool **IsInStockBySku** (string sku, DataTypes.DataTypeAttributes productAttributes)
- override int **GetInventoryLevel** (int productID, DataTypes.DataTypeAttributes productAttributes)
- override int **GetInventoryLevelBySku** (string sku, DataTypes.DataTypeAttributes productAttributes)
- override IDataReader **GetInventoryData** (int productID)
- override IDataReader **GetInventoryDataBySku** (string sku)
- override int **ReduceInventoryLevel** (int productID, DataTypes.DataTypeAttributes productAttributes, int amountPurchased)
- override int **ReduceInventoryLevelBySku** (string sku, DataTypes.DataTypeAttributes productAttributes, int amountPurchased)
- override int **AddInventoryLevel** (int productID, DataTypes.DataTypeAttributes productAttributes, string sku↔ Suffix, int newInventoryLevel)
- override int **AddInventoryLevelBySku** (string sku, DataTypes.DataTypeAttributes productAttributes, string skuSuffix, int newInventoryLevel)
- override void **UpdateInventoryLevel** (int productID, DataTypes.DataTypeAttributes productAttributes, int newInventoryLevel)
- override void **UpdateInventoryLevelBySku** (string sku, DataTypes.DataTypeAttributes productAttributes, int newInventoryLevel)
- override void **DeleteInventoryItem** (int InventoryID)
- override string **GetInventoryStatus** (int productID, DataTypes.DataTypeAttributes productAttributes)
- override string **GetInventoryStatusBySku** (string sku, DataTypes.DataTypeAttributes productAttributes)

Properties


- override bool **IsActive** [get, set]
- string **LowInventoryLevel** [get]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Inventory/SqlInventoryProvider.cs

5.146 FlexwebCommerce.Services.Inventory.SqlSpInventoryProvider Class Reference

Inheritance diagram for FlexwebCommerce.Services.Inventory.SqlSpInventoryProvider:

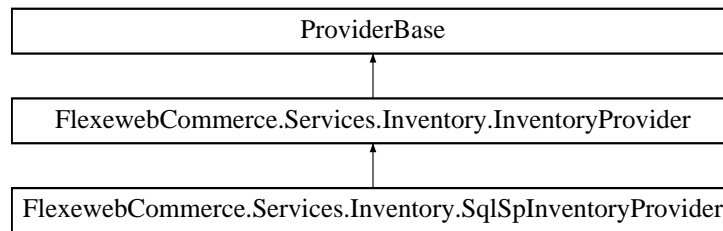

Public Member Functions

- override void **Initialize** (string name, NameValueCollection config)
- override bool **IsInStock** (int productID, DataTypes.DataTypeAttributes productAttributes)
- override bool **IsInStockBySku** (string sku, DataTypes.DataTypeAttributes productAttributes)
- override int **GetInventoryLevel** (int productID, DataTypes.DataTypeAttributes productAttributes)
- override int **GetInventoryLevelBySku** (string sku, DataTypes.DataTypeAttributes productAttributes)
- override IDataReader **GetInventoryData** (int productID)
- override IDataReader **GetInventoryDataBySku** (string sku)
- override int **ReduceInventoryLevel** (int productID, DataTypes.DataTypeAttributes productAttributes, int amountPurchased)
- override int **ReduceInventoryLevelBySku** (string sku, DataTypes.DataTypeAttributes productAttributes, int amountPurchased)
- override int **AddInventoryLevel** (int productID, DataTypes.DataTypeAttributes productAttributes, string sku↔ Suffix, int newInventoryLevel)
- override int **AddInventoryLevelBySku** (string sku, DataTypes.DataTypeAttributes productAttributes, string skuSuffix, int newInventoryLevel)
- override void **UpdateInventoryLevel** (int productID, DataTypes.DataTypeAttributes productAttributes, int newInventoryLevel)
- override void **UpdateInventoryLevelBySku** (string sku, DataTypes.DataTypeAttributes productAttributes, int newInventoryLevel)
- override void **DeleteInventoryItem** (int InventoryID)
- override string **GetInventoryStatus** (int productID, DataTypes.DataTypeAttributes productAttributes)
- override string **GetInventoryStatusBySku** (string sku, DataTypes.DataTypeAttributes productAttributes)

Properties


- override bool **IsActive** [get, set]
- string **LowInventoryLevel** [get]

The documentation for this class was generated from the following file:

- FlexewebCommerce/Services/Inventory/SqlSpInventoryProvider.cs

5.147 FlexewebCommerce.Services.Orders.SqlSpOrderProvider Class Reference

Inheritance diagram for FlexewebCommerce.Services.Orders.SqlSpOrderProvider:

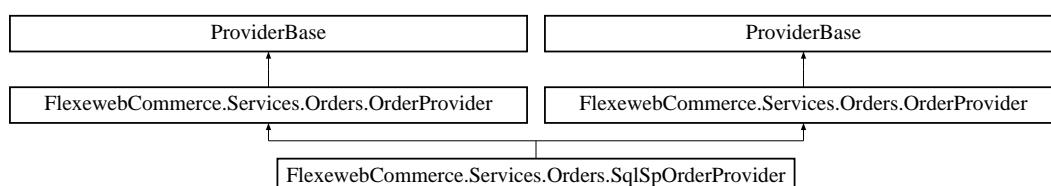

Public Member Functions

- override void **Initialize** (string name, NameValueCollection config)
- override [Order](#) **GetOrder** (int orderId)
- override DataTypes.Order **GetOrder** (Guid orderGuid)
- override DataTypes.OrderCollection **GetAllOrders** ()
- override DataTypes.OrderCollection **GetAllOrders** (string orderStatus)
- override DataTypes.OrderCollection **GetCustomerOrders** ()
- override DataTypes.OrderCollection **GetCustomerOrders** (Guid userId)
- override DataTypes.OrderCollection **GetCustomerOrders** (string userName)
- override DataTypes.OrderCollection **GetCustomerOrders** (Guid userId, string orderStatus)
- override DataTypes.OrderCollection **GetCustomerOrders** (string userName, string orderStatus)
- override DataTypes.Order **GetCurrentCustomerOrder** ()
- override DataTypes.Order **GetCurrentCustomerOrder** (Guid userId)
- override DataTypes.Order **GetCurrentCustomerOrder** (string userName)
- override DataTypes.Order **CreateOrder** (string orderNumber, DateTime orderDate, int orderStatusId, string orderStatus, string userName, string email, string firstName, string lastName, string shippingPhone, string shippingMethod, decimal shippingAmount, decimal handlingAmount, decimal taxAmount, decimal taxRate, string couponCodes, decimal discountAmount, string specialInstructions, int shippingAddressID, int billingAddressID, string userIP, string shippingTrackingNumber, int numberOfPackages, string packagingNotes, string shipmentID, DateTime createdOn, string createdBy, DateTime modifiedOn, string modifiedBy)
- override void **CancelOrder** (DataTypes.Order order)
- override void **CancelOrder** (int orderId)
- override void **CancelOrder** (Guid orderGuid)
- override void **DeleteOrder** (DataTypes.Order order)
- override void **DeleteOrder** (int orderId)
- override void **DeleteOrder** (Guid orderGuid)
- override DataTypes.Transaction **CommitOrder** (DataTypes.Order order, string transactionID, decimal transactionAmount, int transactionTypeId)
- override DataTypes.Transaction **CommitOrder** (string orderId, string transactionID, decimal transactionAmount, int transactionTypeId)
- override DataTypes.Transaction **CommitOrder** (Guid orderGuid, string transactionID, decimal transactionAmount, int transactionTypeId)
- override DataTypes.Transaction **TransactOrder** (DataTypes.Order order, DataTypes.TransactionType transactionType)
- override void **RefundOrder** (DataTypes.Order order)
- override int **AddOrderLine** (int orderId, DataTypes.OrderLine [OrderLine](#))
- override int **AddOrderLine** (int orderId, string sku, object productId, string productName, string productDescription, string productImage, decimal weight, decimal width, decimal height, decimal length, string downloadUrl, int quantity, decimal pricePaid, decimal discount, decimal taxAmount, decimal taxRate, decimal total, string currency, int shipmentID, DataTypes.DataTypeAttributes attributes, DateTime createdOn, string createdBy, DateTime modifiedOn, string modifiedBy)
- override DataTypes.Order **AddOrderLine** (DataTypes.Order order, string sku, object productId, string productName, string productDescription, string productImage, decimal weight, decimal width, decimal height, decimal length, string downloadUrl, int quantity, decimal pricePaid, decimal discount, decimal taxAmount, decimal taxRate, decimal total, string currency, int shipmentID, DataTypes.DataTypeAttributes attributes, DateTime createdOn, string createdBy, DateTime modifiedOn, string modifiedBy)
- override void **DeleteOrderLine** ([OrderLine](#) orderLine)
- override void **DeleteOrderLine** (int orderLineId)
- override void **UpdateOrderLineQuantity** (int orderLineId, int quantity)
- override [OrderStatus](#) **GetOrderStatus** (int orderStatusID)
- override OrderStatusCollection **GetAllOrderStatus** ()
- override DataTypes.OrderStatus **AddOrderStatus** (int sortOrder, string name, DateTime createdOn, string createdBy, DateTime modifiedOn, string modifiedBy)
- override void **DeleteOrderStatus** (int orderStatusID)

- override void **UpdateOrderStatus** (int orderStatusID, int sortOrder, string name, string modifiedOn, DateTime modifiedBy)
- override OrderNoteCollection **GetAllOrderNotes** (int orderId)
- override void **Initialize** (string name, NameValueCollection config)
- override [Order](#) **GetOrder** (int orderId)
- override DataTypes.Order **GetOrder** (Guid orderGuid)
- override DataTypes.OrderCollection **GetAllOrders** ()
- override DataTypes.OrderCollection **GetAllOrders** (string orderStatus)
- override DataTypes.OrderCollection **GetCustomerOrders** ()
- override DataTypes.OrderCollection **GetCustomerOrders** (Guid userId)
- override DataTypes.OrderCollection **GetCustomerOrders** (string userName)
- override DataTypes.OrderCollection **GetCustomerOrders** (Guid userId, string orderStatus)
- override DataTypes.OrderCollection **GetCustomerOrders** (string userName, string orderStatus)
- override DataTypes.Order **GetCurrentCustomerOrder** ()
- override DataTypes.Order **GetCurrentCustomerOrder** (Guid userId)
- override DataTypes.Order **GetCurrentCustomerOrder** (string userName)
- override DataTypes.Order **CreateOrder** (string orderNumber, DateTime orderDate, int orderStatusId, string orderStatus, string userName, string email, string firstName, string lastName, string shippingPhone, string shippingMethod, decimal shippingAmount, decimal handlingAmount, decimal taxAmount, decimal taxRate, string couponCodes, decimal discountAmount, string specialInstructions, int shippingAddressID, int billingAddressID, string userIP, string shippingTrackingNumber, int numberOfPackages, string packagingNotes, string shipmentID, DateTime createdOn, string createdBy, DateTime modifiedOn, string modifiedBy)
- override void **CancelOrder** (DataTypes.Order order)
- override void **CancelOrder** (int orderId)
- override void **CancelOrder** (Guid orderGuid)
- override void **DeleteOrder** (DataTypes.Order order)
- override void **DeleteOrder** (int orderId)
- override void **DeleteOrder** (Guid orderGuid)
- override DataTypes.Transaction **CommitOrder** (DataTypes.Order order, string transactionID, decimal transactionAmount, int transactionTypeId)
- override DataTypes.Transaction **CommitOrder** (string orderId, string transactionID, decimal transactionAmount, int transactionTypeId)
- override DataTypes.Transaction **CommitOrder** (Guid orderGuid, string transactionID, decimal transactionAmount, int transactionTypeId)
- override DataTypes.Transaction **TransactOrder** (DataTypes.Order order, DataTypes.TransactionType transactionType)
- override void **RefundOrder** (DataTypes.Order order)
- override int **AddOrderLine** (int orderId, DataTypes.OrderLine [OrderLine](#))
- override int **AddOrderLine** (int orderId, string sku, object productId, string productName, string productDescription, string productImage, decimal weight, decimal width, decimal height, decimal length, string downloadUrl, int quantity, decimal pricePaid, decimal discount, decimal taxAmount, decimal taxRate, decimal total, string currency, int shipmentID, DataTypes.DataTypeAttributes attributes, DateTime createdOn, string createdBy, DateTime modifiedOn, string modifiedBy)
- override DataTypes.Order **AddOrderLine** (DataTypes.Order order, string sku, object productId, string productName, string productDescription, string productImage, decimal weight, decimal width, decimal height, decimal length, string downloadUrl, int quantity, decimal pricePaid, decimal discount, decimal taxAmount, decimal taxRate, decimal total, string currency, int shipmentID, DataTypes.DataTypeAttributes attributes, DateTime createdOn, string createdBy, DateTime modifiedOn, string modifiedBy)
- override void **DeleteOrderLine** ([OrderLine](#) orderLine)
- override void **DeleteOrderLine** (int orderLineId)
- override void **UpdateOrderLineQuantity** (int orderLineId, int quantity)
- override [OrderStatus](#) **GetOrderStatus** (int orderStatusID)
- override OrderStatusCollection **GetAllOrderStatus** ()
- override DataTypes.OrderStatus **AddOrderStatus** (int sortOrder, string name, DateTime createdOn, string createdBy, DateTime modifiedOn, string modifiedBy)
- override void **DeleteOrderStatus** (int orderStatusID)

- override void **UpdateOrderStatus** (int orderStatusID, int sortOrder, string name, string modifiedOn, DateTime modifiedBy)
- override OrderNoteCollection **GetAllOrderNotes** (int orderId)

Properties

- override bool **IsActive** [get, set]

The documentation for this class was generated from the following files:

- FlexwebCommerce/Services/Address/SqlSpAddressProvider.cs
- FlexwebCommerce/Services/Orders/SqlSpOrderProvider.cs

5.148 Manav.Models.Checkout.StartCheckoutViewModel Class Reference

Properties


- string **CheckoutType** [get, set]
- string **UserName** [get, set]
- string **Password** [get, set]
- bool **RememberMe** [get, set]
- bool **IsGuestCheckout** [get]
- bool **IsRegister** [get]

The documentation for this class was generated from the following file:

- Manav/Models/Checkout/StartCheckoutViewModel.cs

5.149 FlexwebCommerce.Umbraco.App_EventHandler.Events.StartedEvent Class Reference

Inheritance diagram for FlexwebCommerce.Umbraco.App_EventHandler.Events.StartedEvent:

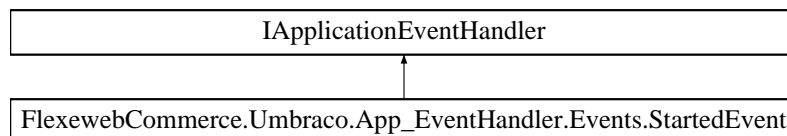

Public Member Functions


- void **OnApplicationInitialized** (UmbracoApplicationBase umbracoApplication, ApplicationContext applicationContext)
- void **OnApplicationStarted** (UmbracoApplicationBase umbracoApplication, ApplicationContext applicationContext)
- void **OnApplicationStarting** (UmbracoApplicationBase umbracoApplication, ApplicationContext applicationContext)

The documentation for this class was generated from the following file:

- FlexwebCommerce.Umbraco/App_EventHandler/Events/ApplicationEvent.cs

5.150 FlexwebCommerce.Config.TabElement Class Reference

Inheritance diagram for FlexwebCommerce.Config.TabElement:

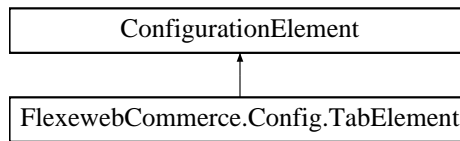

Properties

- string **Name** [get]
Gets the Name setting.
- string **Caption** [get]
- bool **ShowSave** [get]
- bool **ShowDelete** [get]
- bool **ShowPrint** [get]
- bool **Visible** [get]
- string **TabManager** [get]
- string **Path** [get]
- override ConfigurationPropertyCollection **Properties** [get]
Override the Properties collection and return our custom one.

5.150.1 Property Documentation

5.150.1.1 string FlexwebCommerce.Config.TabElement.Name [get]

Gets the Name setting.

5.150.1.2 override ConfigurationPropertyCollection FlexwebCommerce.Config.TabElement.Properties [get], [protected]


Override the Properties collection and return our custom one.

The documentation for this class was generated from the following file:

- FlexwebCommerce/ConfigSections/TabElement.cs

5.151 FlexwebCommerce.Config.TabsSettingsValidation Class Reference

Inheritance diagram for FlexwebCommerce.Config.TabsSettingsValidation:

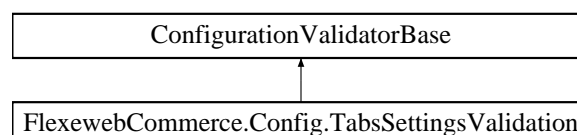

Public Member Functions

- override bool **CanValidate** (Type type)
- override void **Validate** (object value)

5.151.1 Detailed Description

5.151.2 Member Function Documentation


5.151.2.1 override void FlexwebCommerce.Config.TabsSettingsValidation.Validate (object value)

The documentation for this class was generated from the following file:

- FlexwebCommerce/ConfigSections/TabsSettingsValidation.cs

5.152 FlexwebCommerce.Services.Tax.TaxProvider Class Reference

Inheritance diagram for FlexwebCommerce.Services.Tax.TaxProvider:

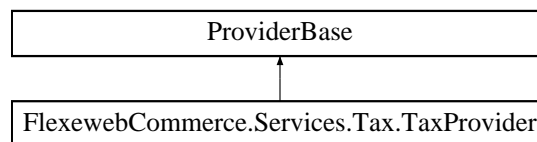

Public Member Functions

- abstract decimal **GetTaxRate** (string countryCode, string countyState)
- abstract decimal **GetTaxRate** (string countryCode, string countyState, ProviderArguments args)
- abstract **Models.Order ApplyTax** (**Models.Order** order)
- abstract **Models.Order ApplyTax** (**Models.Order** order, ProviderArguments args)

Properties


- abstract bool **IsActive** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Tax/TaxProvider.cs

5.153 FlexwebCommerce.Services.Tax.TaxProviderCollection Class Reference

Inheritance diagram for FlexwebCommerce.Services.Tax.TaxProviderCollection:

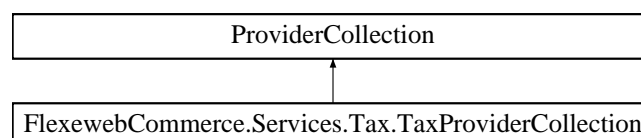

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Tax/TaxProvider.cs

5.154 FlexwebCommerce.Services.Tax.TaxService Class Reference

Static Public Member Functions

- static decimal **GetTaxRate** (string countryCode, string county)
- static decimal **GetTaxRate** (string countryCode, string county, ProviderArguments args)
- static [Models.Order](#) **ApplyTax** ([Models.Order](#) order)
- static [Models.Order](#) **ApplyTax** ([Models.Order](#) order, ProviderArguments args)

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Tax/TaxService.cs

5.155 FlexwebCommerce.Services.Tax.TaxXSLTService Class Reference

Static Public Member Functions


- static decimal **GetTaxRate** (string countryCode, string county)
- static decimal **GetTaxRate** (string countryCode, string county, ProviderArguments args)
- static [Models.Order](#) **ApplyTax** ([Models.Order](#) order)
- static [Models.Order](#) **ApplyTax** ([Models.Order](#) order, ProviderArguments args)

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Tax/TaxService.cs

5.156 FlexwebCommerce.Controllers.api.TestController Class Reference

Inheritance diagram for FlexwebCommerce.Controllers.api.TestController:

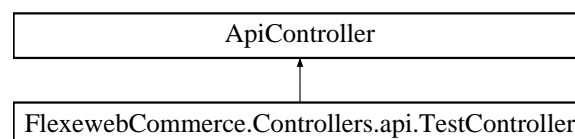

Public Member Functions

- IEnumerable< string > **Get** ()

The documentation for this class was generated from the following file:

- FlexwebCommerce/Controllers/api/TestController.cs

5.157 tmhOAuth Class Reference

Public Member Functions

- [__construct](#) (\$config=array())
- [extract_params](#) (\$body)
- [request](#) (\$method, \$url, \$params=array(), \$useauth=true, \$multipart=false, \$headers=array())
- [streaming_request](#) (\$method, \$url, \$params=array(), \$callback="")
- [url](#) (\$request, \$format='json')
- [transformText](#) (\$text, \$mode='encode')

Public Attributes

- const **VERSION** = '0.7.4'
- **\$response** = array()

5.157.1 Detailed Description

tmhOAuth

An OAuth 1.0A library written in PHP. The library supports file uploading using multipart/form as well as general REST requests. OAuth authentication is sent using the an Authorization Header.

Author

themattharris

Version

0.7.4

19 February 2013

5.157.2 Constructor & Destructor Documentation

5.157.2.1 tmhOAuth::__construct (*\$config* = array())

Creates a new [tmhOAuth](#) object

Parameters

string	<i>\$config, the</i>	configuration to use for this request
--------	----------------------	---------------------------------------

Returns

void

5.157.3 Member Function Documentation

5.157.3.1 tmhOAuth::extract_params (*\$body*)

Extracts and decodes OAuth parameters from the passed string

Parameters

string	<i>\$body</i>	the response body from an OAuth flow method
--------	---------------	---

Returns

array the response body safely decoded to an array of key => values

5.157.3.2 tmhOAuth::request (\$method, \$url, \$params = array(), \$useauth = true, \$multipart = false, \$headers = array())

Make an HTTP request using this library. This method doesn't return anything. Instead the response should be inspected directly.

Parameters

string	<i>\$method</i>	the HTTP method being used. e.g. POST, GET, HEAD etc
string	<i>\$url</i>	the request URL without query string parameters
array	<i>\$params</i>	the request parameters as an array of key=value pairs. Default empty array
string	<i>\$useauth</i>	whether to use authentication when making the request. Default true
string	<i>\$multipart</i>	whether this request contains multipart data. Default false
array	<i>\$headers</i>	any custom headers to send with the request. Default empty array

Returns

int the http response code for the request. 0 is returned if a connection could not be made

5.157.3.3 tmhOAuth::streaming_request (\$method, \$url, \$params = array(), \$callback = '')

Make a long poll HTTP request using this library. This method is different to the other request methods as it isn't supposed to disconnect

Using this method expects a callback which will receive the streaming responses.

Parameters

string	<i>\$method</i>	the HTTP method being used. e.g. POST, GET, HEAD etc
string	<i>\$url</i>	the request URL without query string parameters
array	<i>\$params</i>	the request parameters as an array of key=value pairs
string	<i>\$callback</i>	the callback function to stream the buffer to.

Returns

void

5.157.3.4 tmhOAuth::transformText (\$text, \$mode = 'encode')

Public access to the private safe decode/encode methods

Parameters

string	<i>\$text</i>	the text to transform
--------	---------------	-----------------------

string	<i>\$mode</i>	the transformation mode. either encode or decode
--------	---------------	--

Returns

string \$text transformed by the given \$mode

5.157.3.5 tmhOAuth::url(\$request, \$format = 'json')

Utility function to create the request URL in the requested format

Parameters

string	<i>\$request</i>	the API method without extension
string	<i>\$format</i>	the format of the response. Default json. Set to an empty string to exclude the format

Returns

string the concatenation of the host, API version, API method and format

The documentation for this class was generated from the following file:

- Manav/js/twitter/lib/tmhOAuth.php

5.158 tmhUtilities Class Reference

Static Public Member Functions

- static [entify](#) (\$tweet, &\$replacements=array())
- static [entify_with_options](#) (\$tweet, \$options=array(), &\$replacements=array())
- static [php_self](#) (\$dropqs=true)
- static [is_cli](#) ()
- static [pr](#) (\$obj)
- static [auto_fix_time_request](#) (\$tmhOAuth, \$method, \$url, \$params=array(), \$useauth=true, \$multipart=false)
- static [read_input](#) (\$prompt)
- static [read_password](#) (\$prompt, \$stars=false)
- static [endswith](#) (\$haystack, \$needle)

Public Attributes

- const **VERSION** = '0.5.0'

5.158.1 Detailed Description

[tmhUtilities](#)

Helpful utility and Twitter formatting functions

Author

themattharris

Version

0.5.0

04 September 2012

5.158.2 Member Function Documentation

5.158.2.1 `static tmhUtilities::auto_fix_time_request ($tmhOAuth, $method, $url, $params = array(), $useauth = true, $multipart = false) [static]`

Make an HTTP request using this library. This method is different to 'request' because on a 401 error it will retry the request.

When a 401 error is returned it is possible the timestamp of the client is too different to that of the API server. In this situation it is recommended the request is retried with the OAuth timestamp set to the same as the API server. This method will automatically try that technique.

This method doesn't return anything. Instead the response should be inspected directly.

Parameters

string	<i>\$method</i>	the HTTP method being used. e.g. POST, GET, HEAD etc
string	<i>\$url</i>	the request URL without query string parameters
array	<i>\$params</i>	the request parameters as an array of key=value pairs
string	<i>\$useauth</i>	whether to use authentication when making the request. Default true.
string	<i>\$multipart</i>	whether this request contains multipart data. Default false

5.158.2.2 `static tmhUtilities::endswith ($haystack, $needle) [static]`

Check if one string ends with another

Parameters

string	<i>\$haystack</i>	the string to check inside of
string	<i>\$needle</i>	the string to check \$haystack ends with

Returns

true if \$haystack ends with \$needle, false otherwise

5.158.2.3 `static tmhUtilities::entify ($tweet, &$replacements = array()) [static]`

Entifies the tweet using the given entities element. Deprecated. You should instead use entify_with_options.

Parameters

array	<i>\$tweet</i>	the json converted to normalised array
array	<i>\$replacements</i>	if specified, the entities and their replacements will be stored to this variable

Returns

the tweet text with entities replaced with hyperlinks

5.158.2.4 `static tmhUtilities::entify_with_options ($tweet, $options = array(), &$replacements = array()) [static]`

Entifies the tweet using the given entities element, using the provided options.

Parameters

array	<i>\$tweet</i>	the json converted to normalised array
array	<i>\$options</i>	settings to be used when rendering the entities
array	<i>\$replacements</i>	if specified, the entities and their replacements will be stored to this variable

Returns

the tweet text with entities replaced with hyperlinks

5.158.2.5 static tmhUtilities::php_self (*\$dropqs* = true) [static]

Returns the current URL. This is instead of PHP_SELF which is unsafe

Parameters

bool	<i>\$dropqs</i>	whether to drop the querystring or not. Default true
------	-----------------	--

Returns

string the current URL

5.158.2.6 static tmhUtilities::pr (*\$obj*) [static]

Debug function for printing the content of an object

Parameters

mixes	<i>\$obj</i>	
-------	--------------	--

5.158.2.7 static tmhUtilities::read_input (*\$prompt*) [static]

Asks the user for input and returns the line they enter

Parameters

string	<i>\$prompt</i>	the text to display to the user
--------	-----------------	---------------------------------

Returns

the text entered by the user

5.158.2.8 static tmhUtilities::read_password (*\$prompt*, *\$stars* = false) [static]

Get a password from the shell.

This function works on *nix systems only and requires shell_exec and stty.

Parameters

boolean	<i>\$stars</i>	Wether or not to output stars for given characters
---------	----------------	--

Returns

string <http://www.dasprids.de/blog/2008/08/22/getting-a-password-hidden-from-stdin-with>

The documentation for this class was generated from the following file:

- Manav/js/twitter/lib/tmhUtilities.php

5.159 FlexwebCommerce.Models.Transaction Class Reference

Public Attributes

- DataTypeAttributes **Attributes** = new DataTypeAttributes()

Properties


- int **TransactionID** [get, set]
- string **GatewayIdentifier** [get, set]
- int **OrderID** [get, set]
- string **AuthorizationCode** [get, set]
- DateTime **TransactionDate** [get, set]
- string **TransactionType** [get, set]
- decimal **Amount** [get, set]
- string **Notes** [get, set]
- DateTime **CreatedOn** [get, set]
- string **CreatedBy** [get, set]
- DateTime **ModifiedOn** [get, set]
- string **ModifiedBy** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Models/Transaction.cs

5.160 FlexwebCommerce.Services.Transaction.SqlTransactionProvider.TransactionContext Class Reference

Inheritance diagram for FlexwebCommerce.Services.Transaction.SqlTransactionProvider.TransactionContext:

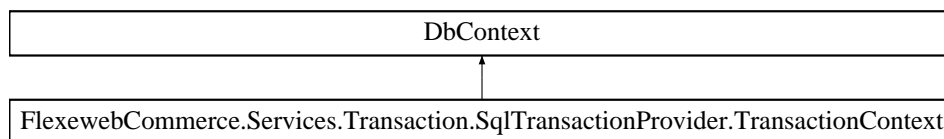

Protected Member Functions

- override void **OnModelCreating** (DbModelBuilder modelBuilder)

Properties


- DbSet< [Models.Transaction](#) > **Transactions** [get, set]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Transaction/SqlTransactionProvider.cs

5.161 FlexwebCommerce.Services.Transaction.TransactionProvider Class Reference

Inheritance diagram for FlexwebCommerce.Services.Transaction.TransactionProvider:

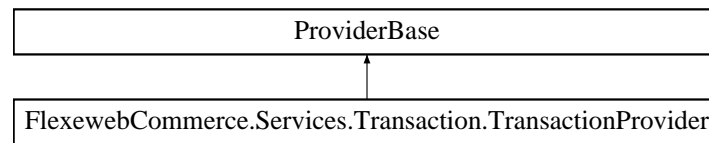

Public Member Functions


- abstract int **CreateTransaction** ([Models.Transaction](#) transaction)
- abstract void **UpdateTransaction** ([Models.Transaction](#) transaction)
- abstract [Models.Transaction](#) **RetrieveTransaction** (int transactionId)
- abstract [Models.Transaction](#) **RetrieveTransactionByGatewayIdentifier** (string gatewayIdentifier)
- abstract IList< [Models.Transaction](#) > **RetrieveTransactionsForOrder** (int orderId)

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Transaction/TransactionProvider.cs

5.162 FlexwebCommerce.Services.Transaction.TransactionProviderCollection Class Reference

Inheritance diagram for FlexwebCommerce.Services.Transaction.TransactionProviderCollection:

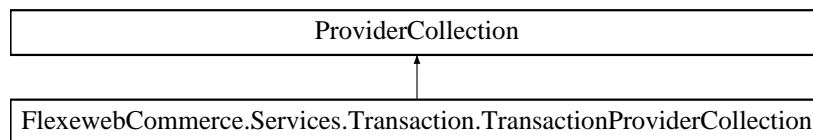

Public Member Functions

- override void **Add** (ProviderBase provider)

Properties

- new [TransactionProvider](#) **this[string name]** [get]

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Transaction/TransactionProvider.cs

5.163 FlexwebCommerce.Services.Transaction.TransactionService Class Reference

Static Public Member Functions

- static int **CreateTransaction** ([Models.Transaction](#) transaction)

- static void **UpdateTransaction** ([Models.Transaction](#) transaction)
- static [Models.Transaction](#) **RetrieveTransaction** (int transactionId)
- static [Models.Transaction](#) **RetrieveTransactionByGatewayIdentifier** (string gatewayIdentifier)
- static IList< [Models.Transaction](#) > **RetrieveTransactionsForOrder** (int orderId)

The documentation for this class was generated from the following file:

- FlexwebCommerce/Services/Transaction/TransactionService.cs


5.164 FlexwebCommerce.Models.TransactionType Class Reference

The documentation for this class was generated from the following file:

- FlexwebCommerce/Models/TransactionType.cs

5.165 FlexwebCommerce.Umbraco.App_EventHandler.Events.TrashedEvent Class Reference

Inheritance diagram for FlexwebCommerce.Umbraco.App_EventHandler.Events.TrashedEvent:

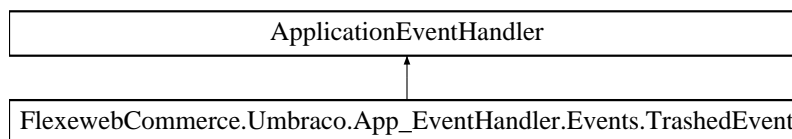


The documentation for this class was generated from the following file:

- FlexwebCommerce.Umbraco/App_EventHandler/Events/TrashedEvent.cs

5.166 FlexwebCommerce.Umbraco.App_EventHandler.Events.TreeEvent Class Reference

Inheritance diagram for FlexwebCommerce.Umbraco.App_EventHandler.Events.TreeEvent:

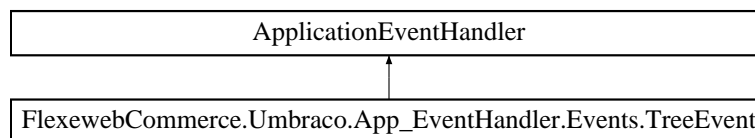

The documentation for this class was generated from the following file:

- FlexwebCommerce.Umbraco/App_EventHandler/Events/TreeEvent.cs

Index

- `__construct`
 - `tmhOAuth`, 107
- `AddCustomer`
 - `FlexewebCommerce::Controllers::api::Customer`↔
`WebServiceController`, 47
- `auto_fix_time_request`
 - `tmhUtilities`, 110
- `ConfigCommerce`, 11
- `ConfigCommerce.Properties`, 11
- `CreateAddress`
 - `FlexewebCommerce::Controllers::api::Address`↔
`WebServiceController`, 28
- `DeleteAddress`
 - `FlexewebCommerce::Controllers::api::Address`↔
`WebServiceController`, 29
- `endswith`
 - `tmhUtilities`, 110
- `entify`
 - `tmhUtilities`, 110
- `entify_with_options`
 - `tmhUtilities`, 110
- `extract_params`
 - `tmhOAuth`, 107
- `ezTweet`, 55
- `FlexewebCommerce`, 11
- `FlexewebCommerce.Basket`, 33
- `FlexewebCommerce.BusinessLogic`, 12
- `FlexewebCommerce.BusinessLogic.Catalogue`, 36
- `FlexewebCommerce.BusinessLogic.Messaging`, 12
- `FlexewebCommerce.BusinessLogic.Messaging`↔
`GenerateDictionary`, 65
- `FlexewebCommerce.BusinessLogic.Promotions`, 12
- `FlexewebCommerce.BusinessLogic.Promotions.Goals`, 12
- `FlexewebCommerce.BusinessLogic.Promotions`↔
`Goals.BuyBundle`, 34
- `FlexewebCommerce.BusinessLogic.Promotions`↔
`Goals.BuyXfromCategory`, 35
- `FlexewebCommerce.BusinessLogic.Promotions`↔
`Goals.BuyXofProduct`, 35
- `FlexewebCommerce.BusinessLogic.Promotions`↔
`Goals.CouponCode`, 42
- `FlexewebCommerce.BusinessLogic.Promotions`↔
`Goals.SpendMoreThan`, 98
- `FlexewebCommerce.BusinessLogic.Promotions`↔
`Rewards`, 12
- `FlexewebCommerce.BusinessLogic.Promotions`↔
`Rewards.AmountOffOrder`, 32
- `FlexewebCommerce.BusinessLogic.Promotions`↔
`Rewards.AmountOffOrderLine`, 33
- `FlexewebCommerce.BusinessLogic.Promotions`↔
`Rewards.FixedRateDiscount`, 56
- `FlexewebCommerce.BusinessLogic.Promotions`↔
`Rewards.FreeProduct`, 62
- `FlexewebCommerce.BusinessLogic.Promotions`↔
`Rewards.PercentOffOrder`, 84
- `FlexewebCommerce.BusinessLogic.Promotions`↔
`Rewards.PercentOffOrderLine`, 84
- `FlexewebCommerce.Config`, 13
- `FlexewebCommerce.Config.AdminUISection`, 30
- `FlexewebCommerce.Config.AdminUISectionCollection`, 30
- `FlexewebCommerce.Config.AdminUISectionTab`↔
`Collection`, 31
- `FlexewebCommerce.Config.AdminUISettingsValidation`, 32
- `FlexewebCommerce.Config.GoalsElementCollection`, 66
- `FlexewebCommerce.Config.PromotionsSection`, 93
- `FlexewebCommerce.Config.RewardsElementCollection`, 94
- `FlexewebCommerce.Config.SectionsSettingsValidation`, 96
- `FlexewebCommerce.Config.ServicesSection`, 97
- `FlexewebCommerce.Config.TabElement`, 104
- `FlexewebCommerce.Config.TabsSettingsValidation`, 104
- `FlexewebCommerce.Controllers`, 13
- `FlexewebCommerce.Controllers.api`, 13
- `FlexewebCommerce.Controllers.api.AddressWeb`↔
`ServiceController`, 27
- `FlexewebCommerce.Controllers.api.CheckoutWeb`↔
`ServiceController`, 41
- `FlexewebCommerce.Controllers.api.CustomerWeb`↔
`ServiceController`, 46
- `FlexewebCommerce.Controllers.api.FulfillmentWeb`↔
`ServiceController`, 65
- `FlexewebCommerce.Controllers.api.ImportWeb`↔
`ServiceController`, 67
- `FlexewebCommerce.Controllers.api.InventoryWeb`↔
`ServiceController`, 70
- `FlexewebCommerce.Controllers.api.OrderWeb`↔
`ServiceController`, 79
- `FlexewebCommerce.Controllers.api.PaymentGateway`↔
`WebServiceController`, 82
- `FlexewebCommerce.Controllers.api.PostcodeWeb`↔

- ServiceController, 86
- FlexewebCommerce.Controllers.api.PromotionWeb↔
ServiceController, 93
- FlexewebCommerce.Controllers.api.SecurityWeb↔
ServiceController, 97
- FlexewebCommerce.Controllers.api.TestController, 106
- FlexewebCommerce.DataTypes, 13
- FlexewebCommerce.DataTypes.DataType, 49
- FlexewebCommerce.FilterConfig, 56
- FlexewebCommerce.FulfillmentContextMigrations, 14
- FlexewebCommerce.GoalsElement, 65
- FlexewebCommerce.Licensing, 70
- FlexewebCommerce.Messages, 71
- FlexewebCommerce.Models, 14
- FlexewebCommerce.Models.Address, 25
- FlexewebCommerce.Models.Catalogue, 36
- FlexewebCommerce.Models.Category, 39
- FlexewebCommerce.Models.Country, 42
- FlexewebCommerce.Models.Coupon, 42
- FlexewebCommerce.Models.Currency, 43
- FlexewebCommerce.Models.Customer, 45
- FlexewebCommerce.Models.Discount, 54
- FlexewebCommerce.Models.EcommerceEnums, 55
- FlexewebCommerce.Models.FulfillmentOption, 63
- FlexewebCommerce.Models.FulfillmentRestriction, 64
- FlexewebCommerce.Models.Inventory, 68
- FlexewebCommerce.Models.MarketingCampaign, 71
- FlexewebCommerce.Models.Order, 72
- FlexewebCommerce.Models.OrderLine, 73
- FlexewebCommerce.Models.OrderNote, 74
- FlexewebCommerce.Models.OrderShipment, 78
- FlexewebCommerce.Models.OrderStatus, 78
- FlexewebCommerce.Models.PackageInfo, 80
- FlexewebCommerce.Models.PaymentGateway, 81
- FlexewebCommerce.Models.PostalZone, 85
- FlexewebCommerce.Models.Product, 87
- FlexewebCommerce.Models.Promotion, 88
- FlexewebCommerce.Models.PromotionGoal, 89
- FlexewebCommerce.Models.PromotionReward, 91
- FlexewebCommerce.Models.Transaction, 112
- FlexewebCommerce.Models.TransactionType, 114
- FlexewebCommerce.OrderContextMigrations, 14
- FlexewebCommerce.PromotionContextMigrations, 15
- FlexewebCommerce.PromotionGoalTypeConverter, 89
- FlexewebCommerce.RewardsElement, 94
- FlexewebCommerce.RouteConfig, 95
- FlexewebCommerce.Services, 15
- FlexewebCommerce.Services.Address, 15
- FlexewebCommerce.Services.Address.Address↔
Provider, 25
- FlexewebCommerce.Services.Address.Address↔
ProviderCollection, 26
- FlexewebCommerce.Services.Address.AddressService, 26
- FlexewebCommerce.Services.Address.SqlAddress↔
Provider.dbContext, 51
- FlexewebCommerce.Services.Catalogue, 15
- FlexewebCommerce.Services.Catalogue.Catalogue↔
Controller, 36
- FlexewebCommerce.Services.Catalogue.Catalogue↔
Provider, 37
- FlexewebCommerce.Services.Catalogue.Catalogue↔
ProviderCollection, 39
- FlexewebCommerce.Services.Catalogue.CatalogueX↔
SLTService, 39
- FlexewebCommerce.Services.Currency, 16
- FlexewebCommerce.Services.Currency.Currency↔
Provider, 43
- FlexewebCommerce.Services.Currency.Currency↔
ProviderCollection, 44
- FlexewebCommerce.Services.Currency.CurrencyXSL↔
TService, 44
- FlexewebCommerce.Services.Currency.SqlCurrency↔
Provider.dbContext, 52
- FlexewebCommerce.Services.Customer, 16
- FlexewebCommerce.Services.Customer.Customer↔
Provider, 45
- FlexewebCommerce.Services.Customer.Customer↔
ProviderCollection, 46
- FlexewebCommerce.Services.Customer.SqlCustomer↔
Provider.dbContext, 52
- FlexewebCommerce.Services.DropShipment, 16
- FlexewebCommerce.Services.DropShipment.Drop↔
ShipmentProvider, 54
- FlexewebCommerce.Services.DropShipment.Drop↔
ShipmentProviderCollection, 54
- FlexewebCommerce.Services.Fulfillment, 16
- FlexewebCommerce.Services.Fulfillment.Banded↔
FulfillmentProvider.dbContext, 53
- FlexewebCommerce.Services.Fulfillment.Fulfillment↔
Provider, 63
- FlexewebCommerce.Services.Fulfillment.Fulfillment↔
ProviderCollection, 64
- FlexewebCommerce.Services.Fulfillment.HttpRequest↔
Handler, 66
- FlexewebCommerce.Services.Import, 16
- FlexewebCommerce.Services.Import.ImportProvider, 67
- FlexewebCommerce.Services.Import.ImportProvider↔
Collection, 67
- FlexewebCommerce.Services.Import.ImportService, 67
- FlexewebCommerce.Services.Inventory, 17
- FlexewebCommerce.Services.Inventory.Inventory↔
Provider, 68
- FlexewebCommerce.Services.Inventory.Inventory↔
ProviderCollection, 69
- FlexewebCommerce.Services.Inventory.InventoryXSL↔
TService, 70
- FlexewebCommerce.Services.Inventory.SqlInventory↔
Provider, 98
- FlexewebCommerce.Services.Inventory.SqlInventory↔
Provider.dbContext, 49
- FlexewebCommerce.Services.Inventory.SqlSplInventory↔
Provider, 99
- FlexewebCommerce.Services.Messaging, 17

- FlexwebCommerce.Services.Messaging.FtpClient, [62](#)
- FlexwebCommerce.Services.Messaging.FtpState, [62](#)
- FlexwebCommerce.Services.Orders, [17](#)
- FlexwebCommerce.Services.Orders.OrderProvider, [75](#)
- FlexwebCommerce.Services.Orders.OrderProvider↔
Collection, [76](#)
- FlexwebCommerce.Services.Orders.OrderService, [77](#)
- FlexwebCommerce.Services.Orders.OrderXSLT↔
Service, [79](#)
- FlexwebCommerce.Services.Orders.SqlOrder↔
Provider.dbContext, [50](#)
- FlexwebCommerce.Services.Orders.SqlSpOrder↔
Provider, [100](#)
- FlexwebCommerce.Services.Payment, [17](#)
- FlexwebCommerce.Services.Payment.Payment↔
GatewayProvider, [81](#)
- FlexwebCommerce.Services.Payment.Payment↔
GatewayProviderCollection, [82](#)
- FlexwebCommerce.Services.Payment.Payment↔
Provider, [83](#)
- FlexwebCommerce.Services.Payment.Payment↔
ProviderCollection, [83](#)
- FlexwebCommerce.Services.Payment.Payment↔
Service, [83](#)
- FlexwebCommerce.Services.Payment.PaymentXSL↔
TService, [84](#)
- FlexwebCommerce.Services.Postcode, [18](#)
- FlexwebCommerce.Services.Postcode.Postcode↔
Provider, [85](#)
- FlexwebCommerce.Services.Postcode.Postcode↔
ProviderCollection, [86](#)
- FlexwebCommerce.Services.Postcode.Postcode↔
Service, [86](#)
- FlexwebCommerce.Services.Promotion, [18](#)
- FlexwebCommerce.Services.Promotion.OrderXSLT↔
Service, [79](#)
- FlexwebCommerce.Services.Promotion.Promotion↔
Provider, [90](#)
- FlexwebCommerce.Services.Promotion.Promotion↔
ProviderCollection, [91](#)
- FlexwebCommerce.Services.Promotion.Promotion↔
Service, [92](#)
- FlexwebCommerce.Services.Promotion.Standard↔
PromotionProvider.dbContext, [51](#)
- FlexwebCommerce.Services.ProviderUtils, [94](#)
- FlexwebCommerce.Services.Tax, [18](#)
- FlexwebCommerce.Services.Tax.TaxProvider, [105](#)
- FlexwebCommerce.Services.Tax.TaxProvider↔
Collection, [105](#)
- FlexwebCommerce.Services.Tax.TaxService, [106](#)
- FlexwebCommerce.Services.Tax.TaxXSLTService,
[106](#)
- FlexwebCommerce.Services.Transaction, [18](#)
- FlexwebCommerce.Services.Transaction.SqlTransaction↔
Provider.TransactionContext, [112](#)
- FlexwebCommerce.Services.Transaction.Transaction↔
Provider, [113](#)
- FlexwebCommerce.Services.Transaction.Transaction↔
ProviderCollection, [113](#)
- FlexwebCommerce.Services.Transaction.Transaction↔
Service, [113](#)
- FlexwebCommerce.TransactionContextMigrations, [18](#)
- FlexwebCommerce.Umbraco, [19](#)
- FlexwebCommerce.Umbraco.Admin, [19](#)
- FlexwebCommerce.Umbraco.Admin.Interfaces, [19](#)
- FlexwebCommerce.Umbraco.Admin.Interfaces.Flx↔
TreeController, [61](#)
- FlexwebCommerce.Umbraco.Admin.Models, [19](#)
- FlexwebCommerce.Umbraco.Admin.Models.FlxTree↔
Node, [61](#)
- FlexwebCommerce.Umbraco.Admin.UI, [19](#)
- FlexwebCommerce.Umbraco.Admin.UI.FlxCatalogue↔
Tree, [58](#)
- FlexwebCommerce.Umbraco.Admin.UI.FlxOrderTree,
[59](#)
- FlexwebCommerce.Umbraco.Admin.UI.FlxPromotion↔
Tree, [60](#)
- FlexwebCommerce.Umbraco.Admin.UI.RootNodeKey,
[95](#)
- FlexwebCommerce.Umbraco.App_EventHandler, [20](#)
- FlexwebCommerce.Umbraco.App_EventHandler.↔
Events, [20](#)
- FlexwebCommerce.Umbraco.App_EventHandler.↔
Events.SavedEvent, [96](#)
- FlexwebCommerce.Umbraco.App_EventHandler.↔
Events.SavingEvent, [96](#)
- FlexwebCommerce.Umbraco.App_EventHandler.↔
Events.StartedEvent, [103](#)
- FlexwebCommerce.Umbraco.App_EventHandler.↔
Events.TrashedEvent, [114](#)
- FlexwebCommerce.Umbraco.App_EventHandler.↔
Events.TreeEvent, [114](#)
- FlexwebCommerce.Umbraco.Content, [20](#)
- FlexwebCommerce.Umbraco.Content.flxCatalogues↔
Data, [57](#)
- FlexwebCommerce.Umbraco.Content.flxCommerce↔
Application, [58](#)
- FlexwebCommerce.Umbraco.Content.flxMarketing↔
Data, [58](#)
- FlexwebCommerce.Umbraco.Content.flxOrdersData,
[59](#)
- FlexwebCommerce.Umbraco.Content.flxReportsData,
[60](#)
- FlexwebCommerce.Umbraco.Content.flxSettingsData,
[60](#)
- FlexwebCommerce.Umbraco.Content.Property↔
EditorTypes, [20](#)
- FlexwebCommerce.Umbraco.Content.Property↔
EditorTypes.CategorySelector, [40](#)
- FlexwebCommerce.Umbraco.Content.Property↔
EditorTypes.ProductSelector, [88](#)
- FlexwebCommerce.Umbraco.Controllers, [20](#)
- FlexwebCommerce.Umbraco.Controllers.api, [21](#)
- FlexwebCommerce.Umbraco.Controllers.api.Catalogue↔
Controller, [37](#)
- FlexwebCommerce.Umbraco.Controllers.Trees, [21](#)

- FlexwebCommerce.Umbraco.Controllers.Trees.flx↔
TreeController, 61
- FlexwebCommerce.Umbraco.FilterConfig, 56
- FlexwebCommerce.Umbraco.Resolvers, 21
- FlexwebCommerce.Umbraco.Resolvers.hasChildren↔
Resolver, 66
- FlexwebCommerce.Umbraco.Resolvers.MapUmbraco↔
ToModelResolver< T >, 70
- FlexwebCommerce.Umbraco.RouteConfig, 95
- FlexwebCommerce.Umbraco.Services, 21
- FlexwebCommerce.Umbraco.Services.Catalogue, 21
- FlexwebCommerce.Umbraco.Services.Customer, 21
- FlexwebCommerce.Umbraco.Services.Logging, 21
- FlexwebCommerce.Umbraco.Services.Messaging, 22
- FlexwebCommerce.Umbraco.Services.Security, 22
- FlexwebCommerce.WorkFlows, 22
- FlexwebCommerce.WorkFlows.Checkout, 40
- FlexwebCommerce::Basket
InitializeComponent, 34
- FlexwebCommerce::Config::AdminUISettings↔
Validation
Validate, 32
- FlexwebCommerce::Config::TabElement
Name, 104
Properties, 104
- FlexwebCommerce::Config::TabsSettingsValidation
Validate, 105
- FlexwebCommerce::Controllers::api::AddressWeb↔
ServiceController
CreateAddress, 28
DeleteAddress, 29
GetAddress, 29
GetCurrentCustomerAddresses, 29
GetCurrentCustomerDefaultBillingAddress, 29
GetCurrentCustomerDefaultShippingAddress, 29
UpdateAddress, 30
- FlexwebCommerce::Controllers::api::CustomerWeb↔
ServiceController
AddCustomer, 47
GenerateResetToken, 48
Get, 48
UpdateCurrentCustomersPassword, 48
UpdateCustomer, 48
UpdatePassword, 49
- FlexwebCommerce::Controllers::api::Payment↔
GatewayWebServiceController
ValidatePayPalPayment, 82
- FlexwebCommerce::Controllers::api::PostcodeWeb↔
ServiceController
GetAddressById, 87
GetAddressListFromPostcode, 87
- FlexwebCommerce::Umbraco::Content::flxCatalogues↔
Data
flxCatalogueContentTypeAlias, 57
flxCataloguesContentName, 57
flxCataloguesContentTypeAlias, 57
- FlexwebCommerce::Umbraco::Content::flxMarketing↔
Data
flxMarketingContentTypeAlias, 59
- FlexwebCommerce::WorkFlows::Checkout
InitializeComponent, 41
- flxCatalogueContentTypeAlias
FlexwebCommerce::Umbraco::Content::flx↔
CataloguesData, 57
- flxCataloguesContentName
FlexwebCommerce::Umbraco::Content::flx↔
CataloguesData, 57
- flxCataloguesContentTypeAlias
FlexwebCommerce::Umbraco::Content::flx↔
CataloguesData, 57
- flxMarketingContentTypeAlias
FlexwebCommerce::Umbraco::Content::flx↔
MarketingData, 59
- GenerateResetToken
FlexwebCommerce::Controllers::api::Customer↔
WebServiceController, 48
- Get
FlexwebCommerce::Controllers::api::Customer↔
WebServiceController, 48
- GetAddress
FlexwebCommerce::Controllers::api::Address↔
WebServiceController, 29
- GetAddressById
FlexwebCommerce::Controllers::api::Postcode↔
WebServiceController, 87
- GetAddressListFromPostcode
FlexwebCommerce::Controllers::api::Postcode↔
WebServiceController, 87
- GetCurrentCustomerAddresses
FlexwebCommerce::Controllers::api::Address↔
WebServiceController, 29
- GetCurrentCustomerDefaultBillingAddress
FlexwebCommerce::Controllers::api::Address↔
WebServiceController, 29
- GetCurrentCustomerDefaultShippingAddress
FlexwebCommerce::Controllers::api::Address↔
WebServiceController, 29
- InitializeComponent
FlexwebCommerce::Basket, 34
FlexwebCommerce::WorkFlows::Checkout, 41
- Manav, 22
- Manav.Controllers, 22
- Manav.Controllers.CheckoutSurfaceController, 41
- Manav.Models, 22
- Manav.Models.Checkout, 22
- Manav.Models.Checkout.DeliveryViewModel, 53
- Manav.Models.Checkout.StartCheckoutViewModel, 103
- My, 23
- Name
FlexwebCommerce::Config::TabElement, 104
- Our, 23
- Our.Umbraco, 23

- Our.Umbraco.ezSearch, [23](#)
- Our.Umbraco.ezSearch.ezSearchBoostrapper, [55](#)
- php_self
 - tmhUtilities, [111](#)
- pr
 - tmhUtilities, [111](#)
- Properties
 - FlexewebCommerce::Config::TabElement, [104](#)
- read_input
 - tmhUtilities, [111](#)
- read_password
 - tmhUtilities, [111](#)
- request
 - tmhOAuth, [108](#)
- streaming_request
 - tmhOAuth, [108](#)
- tmhOAuth, [107](#)
 - __construct, [107](#)
 - extract_params, [107](#)
 - request, [108](#)
 - streaming_request, [108](#)
 - transformText, [108](#)
 - url, [109](#)
- tmhUtilities, [109](#)
 - auto_fix_time_request, [110](#)
 - endswith, [110](#)
 - entify, [110](#)
 - entify_with_options, [110](#)
 - php_self, [111](#)
 - pr, [111](#)
 - read_input, [111](#)
 - read_password, [111](#)
- transformText
 - tmhOAuth, [108](#)
- UpdateAddress
 - FlexewebCommerce::Controllers::api::Address↔
WebServiceController, [30](#)
- UpdateCurrentCustomersPassword
 - FlexewebCommerce::Controllers::api::Customer↔
WebServiceController, [48](#)
- UpdateCustomer
 - FlexewebCommerce::Controllers::api::Customer↔
WebServiceController, [48](#)
- UpdatePassword
 - FlexewebCommerce::Controllers::api::Customer↔
WebServiceController, [49](#)
- url
 - tmhOAuth, [109](#)
- Validate
 - FlexewebCommerce::Config::AdminUISettings↔
Validation, [32](#)
 - FlexewebCommerce::Config::TabsSettings↔
Validation, [105](#)
- ValidatePayPalPayment
 - FlexewebCommerce::Controllers::api::Payment↔
GatewayWebServiceController, [82](#)
 - XamlStaticHelperNamespace, [23](#)